


REVERSIBLE, WITH AUTOMATIC FEEDING, COOLANT SYSTEM,  
EQUIPPED WITH LED LIGHT. WITH GEAR SPEED CHANGE.



**FERVI**plus

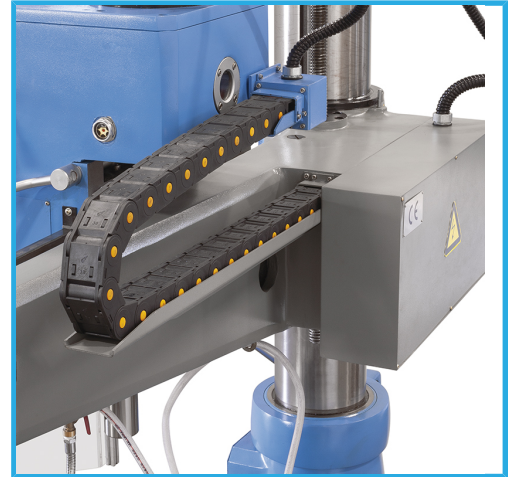

Max drilling capacity on cast iron with pre-drilling hole	50 mm
Max drilling capacity on steel with pre-drilling hole(s235jr)	40 mm
Continuous drilling capacity	36 mm
Spindle taper	MT 4
Chuck sizes	3 - 13 mm B18
Spindle speed	(6) 75 - 1220 rpm
Spindle travel	240 mm
Quill	70 mm
Column	200 mm
Distance between spindle axis and column	1020 mm
Distance between spindle nose and table	860 mm
Distance between spindle nose and base	1210 mm
Feed range	(3) 0,1 - 0,16 - 0,25 mm/rev
Cube dimensions	400 x 400 x 350 mm
Slot	18 mm
Base dimensions	1370 x 700 mm
Motor	400 V 50 Hz 1,5 kW
Lifting motor radial arm	400 V 50 Hz 0,75 kW
Cooling pump	400 V 50 Hz 90 W
Dimensions	1760 x 770 x 2100h mm
Net weight	1250 kg
Packaging dimensions	1750 x 740 x 2140 mm
Gross weight	1200,00 kg

### Included

Drill chuck with key 3 - 13 mm B18  
Spindle drilled MT 4 B18  
Reduction sleeve MT 4/3  
Reduction sleeve MT 3/2  
LED Lamp  
Coolant system  
Base cube

EAN Code

8012667315474