

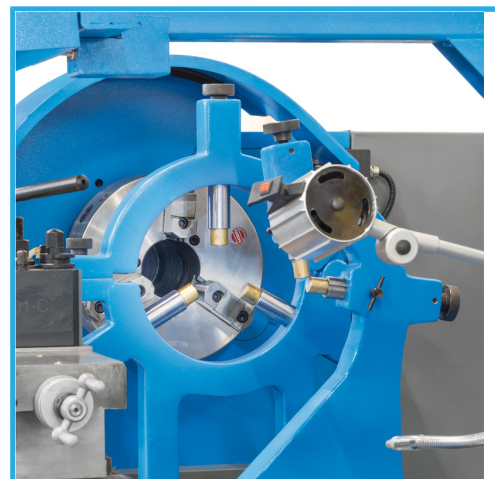


WITH MECHANICAL SPINDLE CLUTCH AND 3 AXIS READOUT, SEMI NORTON GEAR BOX. EQUIPPED WITH A JOYSTICK FOR THE INSERTION OF RAPID...

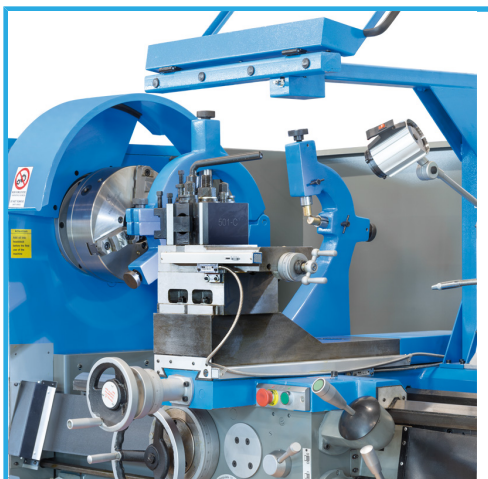

FERVIplus

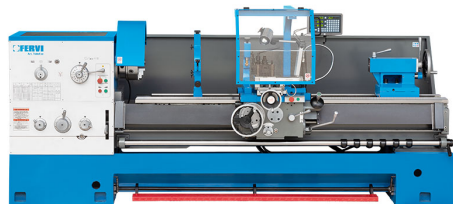

Centers height	385 mm
Max swing over the bed	770 mm
Max swing over the cross slide	575 mm
Max swing over the gap	1050 mm
Tool height	32 mm
Distance between centers	3000 mm
Spindle bore	105 mm
Spindle nose Camlock	Camlock D1-8
Spindle speed	(12) 36 - 1600 rpm
Longitudinal feeds	0,063 - 2,52 mm/rev
Cross feeds	0,027 - 1,07 mm/rev
Metric threads	(22) 1 - 14 mm
Inch threads	(26) 2 - 28 TPI
Tailstock taper MT	5
Motor	400 V 50 Hz 7,5 kW
Cooling pump	400 V 50 Hz 90 W
Dimensions	4500 x 1550 x 1700 mm
Net weight	4050 kg
Packaging dimensions	-
EAN Code	8012667402112
Gross weight	4050,00 kg

Included

3 reversible jaw self centering chuck Ø 320 mm
4 independent jaw chuck Ø 400 mm
Special reduction sleeve 105 mm/MT 5
Face plate Ø 600 mm
Follow rest
Steady rest
Dead center MT 5
Live center MT 5
Thread dial
Leadscrew hood
Tool post guard
Chuck safeguard
Full length splash guard
Italy style quick change tool post type C
Working LED lamp
Cooling system
Electromechanical foot brake
Tailstock carriage a quick locking
Wagon gears in oil bath
Adjustable leveling feet