

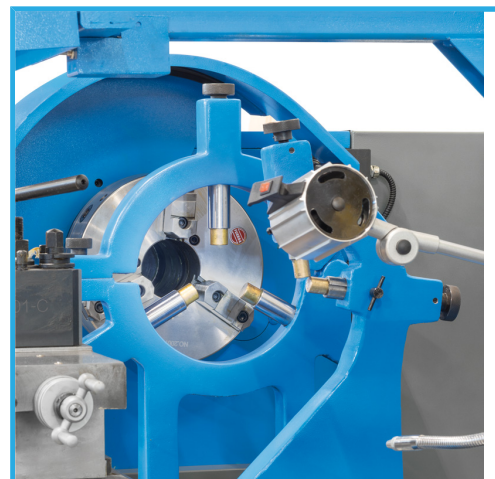


WITH MECHANICAL SPINDLE CLUTCH AND 3 AXIS READ OUT, SEMI NORTON GEAR BOX. EQUIPPED WITH A JOYSTICK FOR THE INSERTION OF RAPID...

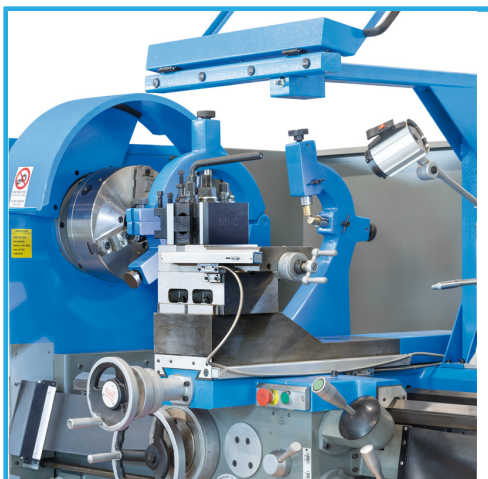

FERVIplus

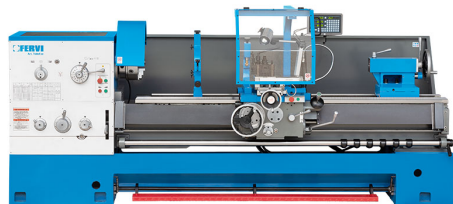

Centers height	330 mm
Max swing over the bed	660 mm
Max swing over the cross slide	420 mm
Max swing over the gap	870 mm
Tool height	32 mm
Distance between centers	1500 mm
Spindle bore	105 mm
Spindle nose Camlock	Camlock D1-8
Spindle speed	(12) 36 - 1600 rpm
Longitudinal feeds	0,063 - 2,52 mm/rev
Cross feeds	0,027 - 1,07 mm/rev
Metric threads	(22) 1 - 14 mm
Inch threads	(26) 2 - 28 TPI
Tailstock taper MT	5
Motor	400V 50/60 Hz 7,5 kW
Cooling pump	400V 50/60 Hz 90 W
Dimensions	3000 x 1400 x 1600 mm
Net weight	3330 Kg
EAN Code	8012667402150
Packaging dimensions	3000 x 1400 x 1600h mm
Gross weight	3300,00 kg

Included

3 reversible jaw self centering chuck Ø 320 mm
4 independent jaw chuck Ø 400 mm
Face plate Ø 600 mm
Follow rest
Follow rest
Live center MT 5
Thread dial
Leadscrew hood
Tool post guard
Chuck safeguard
Full length splash guard
Italy style quick change tool post type C
Working LED lamp
Cooling system
Electromechanical foot brake
Tailstock carriage a quick locking
Wagon gears in oil bath
Adjustable leveling feet