

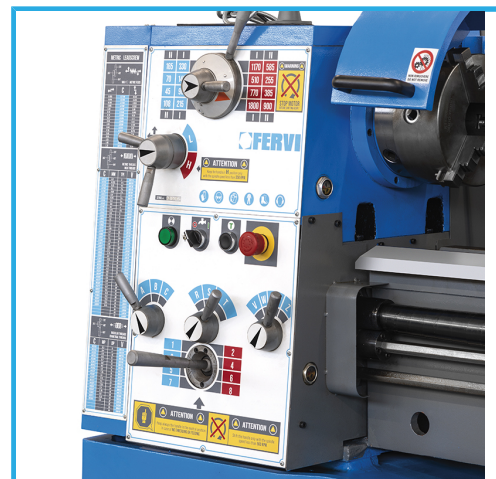


WITH 2 SPEED MOTOR AND 3 AXIS READOUT, SEMI NORTON GEAR BOX. WITH CAST IRON MONOBLOC BASE.

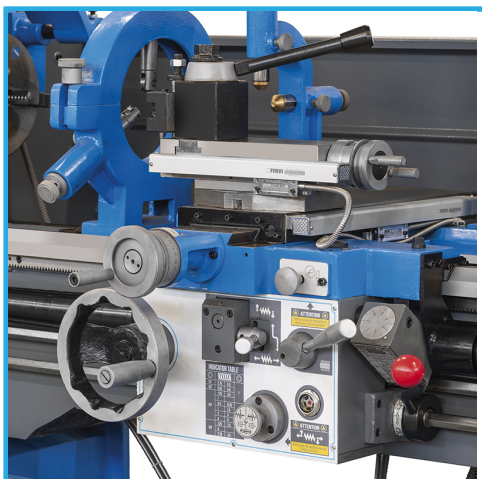

FERVIplus

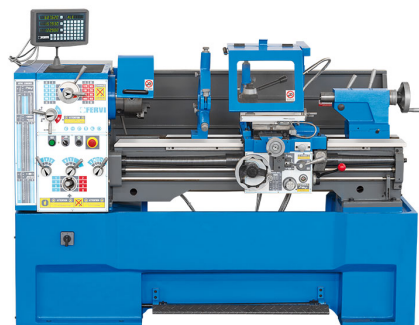

Centers height	210 mm
Max swing over the bed	420 mm
Max swing over the cross slide	255 mm
Max swing over the gap	580 mm
Tool height	20 mm
Distance between centers	1000 mm
Spindle bore	52 mm
Spindle nose Camlock	Camlock D1-6
Spindle bore taper MT	6
Variable spindle speed	(16) 45 - 1800 rpm
Spindle speed	(16) 45 - 1800 rpm
Longitudinal feeds	(17) 0,05 - 1,7 mm/giro
Cross feeds	(17) 0,025 - 0,85 mm/giro
Metric threads	(42) 0,2 - 14 mm
Inch threads	(45) 0,2 - 14 mm
Tailstock taper MT	4
Motor	400 V 50 Hz 2,2/3,3 kW
Cooling pump	400 V 50 Hz 90 W
Dimensions	2030 x 1000 x 1450 mm
Net weight	1200 kg
Packaging dimensions	2150 x 1100 x 1650 mm
Gross weight	1200,00 kg
EAN Code	8012667432287

Included

3+3 jaw self centering chuck Ø 200 mm
4 independent jaw chuck Ø 250 mm
Reduction sleeve MT 6/4
Face plate Ø 350 mm
Follow rest
Steady rest
2 x Dead center MT 4
Live center MT 4
Thread dial
Turret guard
Chuck safeguard
Full length splash guard
Quick change tool post type B
Working lamp LED
Cooling system
Foot brake
Quick locking tailstock carriage
Wagon gears in oil bath
Adjustable leveling feet