
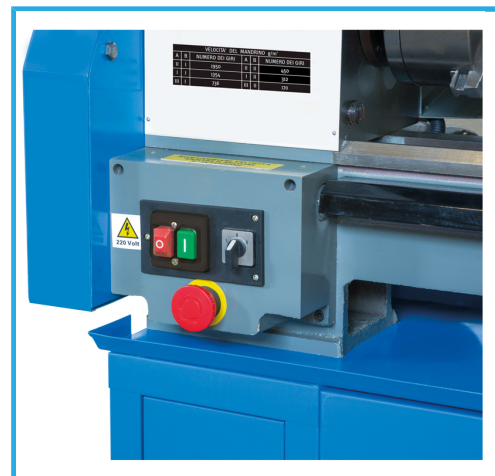


WITH SPEED CHANGE BY GEARS, MORSE TAPERED SPINDLE BEARINGS, ADJUSTABLE SIGNS, LEADSCREW HOOD, CHUCK GUARD WITH MICROSWITCH.

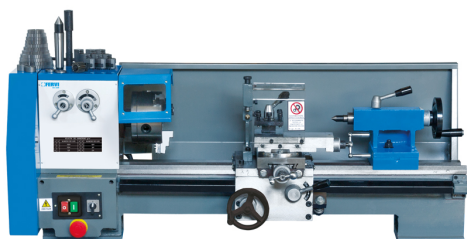

Centers height	110 mm
Max swing over the bed	200 mm
Max swing over the cross slide	122 mm
Tool height	12 mm
Distance between centers	520 mm
Spindle bore	20 mm
Spindle bore taper MT	3
Spindle speed	(6) 170 - 1950 rpm
Longitudinal feeds	0,04 - 0,20 mm/rev
Metric threads	0,25 - 3 mm
Inch threads	8 - 48 TPI
Tailstock taper MT	2
Motor	230 V 50 Hz 0,55 kW
Dimensions	1080 x 440 x 400h mm
Net weight	130 kg
Packaging dimensions	1225x565x560 h mm
Gross weight	143,50 kg
EAN Code	8012667181864

Included

3+3 jaw self centering chuck Ø 125 mm
Follow rest
Dead center MT2
Dead center MT3
Thread dial
Leadscrew hood
Turret safeguard with micro switch
Chuck safeguard
Full length splash guard
4 side fix tool post 12 mm