



RECHARGE LEAD BATTERIES, AMG, AL, GEL, WET, VRLA, MF.
MICROPROCESSOR FOR A 9 STEP AUTOMATIC RECHARGE. RECHARGE
MODE 14.7V - 2A...

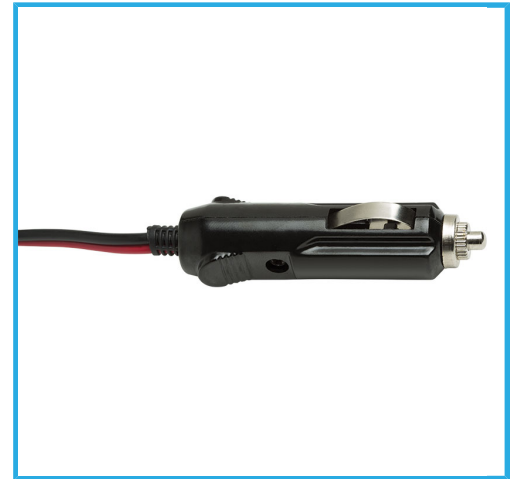

Power	230 V 50 - 60 Hz
Power	14,7 V 4 A max
Operation mode motorcycle	14.4 V 1 A
Operation mode auto	14.4 V 4 A
Operation mode winter	14.7 V 4 A
Operation mode battery charger	6 V : 7.2 V 4 A
Working temperature	-20â„ƒ a +50â„ƒ
Overall sizes	145 x 56 x 230 mm
Battery	12 V, 6 V
Gross weight	0,50 kg
Packaging dimensions	270x145x60 h mm
EAN Code	8012667270513

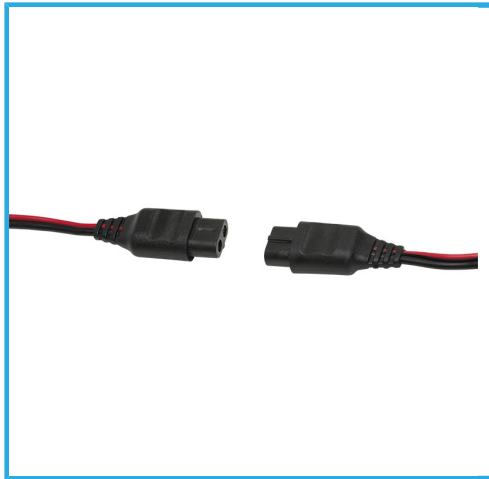

Hangable

Included

Cable with 12 V DC car socket
Cable with crocodile clips for temporary battery connections
Battery cable with eyelets