


fervi.com info ▶

48

FERVI

THE CATALOGUE

THE CATALOGUE FOR
MRO PROFESSIONALS
(MAINTENANCE, REPAIR
AND OPERATIONS)

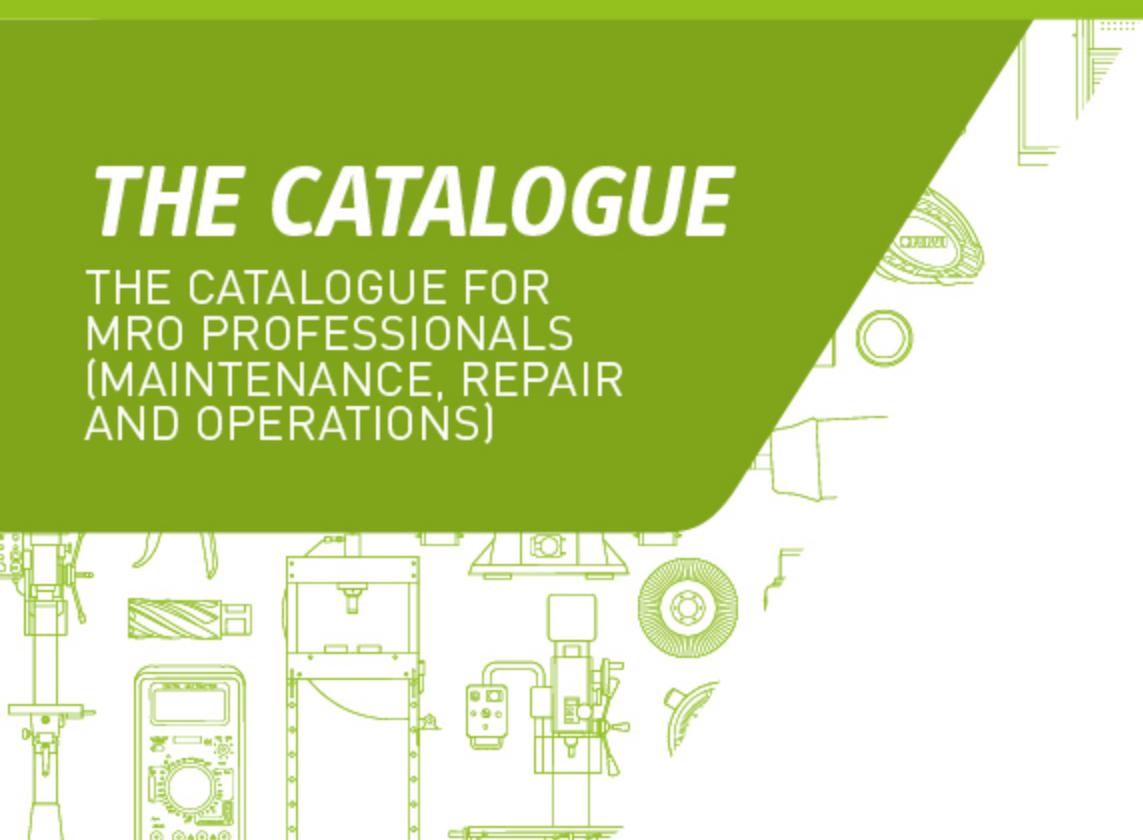



**POWER TOOLS**

p. 515



Cordless powertools

p. 523



Wire powertools

**SOLDERING IRONS, PAINT STRIPPERS
AND HEAT GLUE GUNS**

p. 542



Solderings

p. 543



Hot air guns

p. 544



Glue guns

**HEATERS, LIGHTING
AND LENSES**

p. 553



Heaters

p. 554



LED Lights

p. 555



Lamps

p. 556



Magnifier lens

p. 557

Battery operated torches
and lamps

p. 558



Powers sockets

**PNEUMATICS**

p. 528



Staplers and brad nailers

p. 530



Air impact wrenches

p. 533



Air die grinders

p. 535



Air belt sander

p. 536



Air guns

p. 538



Spray guns

p. 541



Air hose reel

**EQUIPMENT FOR
LIQUIDS AND FLUIDS**

p. 545



Oilers

p. 546



Greaser guns

p. 547



Spray

p. 550



Tanks

p. 550



Pressure sprayers

p. 551



Pumps



FERVI POWER TOOLS

Designed to take your work experience to the next level - easier, faster and more efficient. Thanks to cutting-edge technologies and high-quality materials, they are designed to last over time and offer exceptional performance.

POWER

Our power tools are equipped with powerful motors that will allow you to tackle even the most demanding challenges with ease.

MORE POWER

We have designed a wide range of tools to suit your specific needs, be it professional work, DIY or home maintenance. Our advanced technology ensures greater energy efficiency, thus helping to reduce energy consumption.

EXTRAPOWER

They are designed with your comfort in mind, with ergonomic handles and an intuitive design to reduce fatigue during use. Our range is built to resist wear and tear and ensure long life, so you can rely on them for many years to come.

A complete range consisting of the battery-powered line with 20 V platform - F20VRange - and the wired one to meet your application needs.



NEW

FB36CS3AS-15M**CORDLESS SCREWDRIVER WITH BITS**

Supplied in a tin box, with 30 bits in a case. USB-C battery charger.



1/4"


Li-ion
BatteryAutomatic
lockingVariable
TorqueReverse
Attachment

Soft Grip

Voltage	3,6V
No-load speed	200 min-1
Battery	1,5 Ah
Torque	3 Nm
Shank	1/4"
Drilling output steel	3 mm
Drilling output wood	5 mm
Max screw diameter	4 mm

FB12CD3AS-22B**CORDLESS DRILL - SCREWDRIVER 12V**

Automatic spindle lock, Keyless self-tightening chuck, 21 clutch settings, Step speed selection, Electronic speed adjustment, Variable torque, 2 modes: screwdriving and drilling, Reverse rotation, Quick charge, Belt clip, Built-in LED light

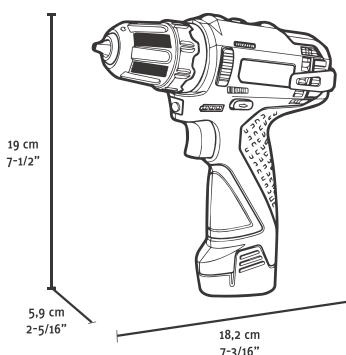Carrying
caseBrushless
MotorElectronic
Speed

Keyless

Variable
TorqueSpeed
Selector

2 Functions

No-load speed

0-380 min-1 / 0-1250 min-1

Max 28 mm

Chuck tightening range

0,8 - 10 mm

6 mm

Torque

19 / 30 Nm

2 x 2 Ah, 12 V

Drilling output steel

Max 10 mm

2 A, 12 V



Platform

F20V RANGE




High performance brushless motor

The right range in the right place

Optimized battery cells

FB20CD3AB-**CORDLESS DRILL - SCREWDRIVER 20V**

Brushless motor, Automatic spindle lock, Keyless self-tightening chuck, 21 clutch settings, Step speed selection, Electronic speed adjustment, Variable torque, 2 modes: screwdriving and drilling, Reverse rotation, Belt clip, Built-in LED light, Effective motor cooling system



Configuration
FB20CD3AB-24B




No-load speed	0-420 min-1 / 0-1400 min-1
Chuck tightening range	2-13mm
Torque	35/55Nm
Drilling output steel	Max 13 mm
Drilling output wood	Max 40 mm
Max screw diameter	8mm

Art.	Battery	Battery charger
FB20CD3AB-12B	1 x 2 Ah, 20 V	2 A, 20 V
FB20CD3AB-14B	1 x 4 Ah, 20 V	4 A, 20 V
FB20CD3AB-22B	2 x 2 Ah, 20 V	2 A, 20 V
FB20CD3AB-24B	2 x 4 Ah, 20 V	4 A, 20 V
FB20CD3AB-B	Not included	Not included

FB20ID3AB-**IMPACT DRILL / SCREWDRIVER 20 V**

Brushless motor, Automatic spindle lock, Metal keyless self-tightening chuck, 1 clutch settings, Step speed selection, Electronic speed adjustment, Variable torque, 3 modes: screwdriving/drilling/impact drilling, Reverse rotation, Belt clip, Built-in LED light, Large air vents.



Configuration
FB20ID3AB-24B




No-load speed	0-550 min-1 / 0-2000 min-1
Impact rate	0-7500 min-1 / 0-30000 min-1
Chuck tightening range	1,5-13mm
Torque	70/75Nm
Drilling output concrete	Max 16 mm
Drilling output steel	Max 13 mm
Drilling output wood	Max 40 mm
Max screw diameter	10 mm

Art.	Battery	Battery charger
FB20ID3AB-12B	1 x 2 Ah, 20 V	2 A, 20 V
FB20ID3AB-14B	1 x 4 Ah, 20 V	4 A, 20 V
FB20ID3AB-22B	2 x 2 Ah, 20 V	2 A, 20 V
FB20ID3AB-24B	2 x 4 Ah, 20 V	4 A, 20 V
FB20ID3AB-B	Not included	Not included

**FB20RH3AB-****HEAVY ROTARY HAMMER 20 V**

Brushless motor, SDS-Plus chuck, Rotation speed stabilization system at both an idle and under load, 3 modes: drilling/impact drilling/chiselling, Vario-lock mode, Anti-vibrations system, Safety clutch to prevent motor damages and overloads, Built-in LED light, Depth stop included

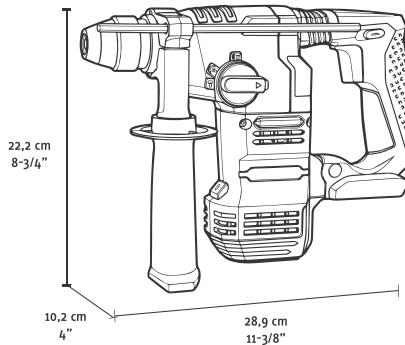

Configuration
FB20RH3AB-24B




No-load speed	0-1400 min-1
Impact rate	0-4500 min-1
Percussion force	2,3 J
Chuck sizes	SDS-Plus
Drilling output concrete	Max 18 mm
Drilling output steel	Max 13 mm
Drilling output wood	Max 20 mm

Art.	Battery	Battery charger
FB20RH3AB-24B	2 x 4 Ah, 20 V	4 A, 20 V
FB20RH3AB-B	Not included	Not included

FB20AG3AB-**ANGLE GRINDER 125MM 20 V**

Brushless motor, Soft start for increased safety of use, Restart protection, Two-position on/off switch with locking system, Safety clutch to prevent motor damages and overloads, Quick adjustable guard, Soft rubber grip, Metal dust filter on air intake, Small size machine body, Thick soft rubber anti-vibration grip, Large air vents

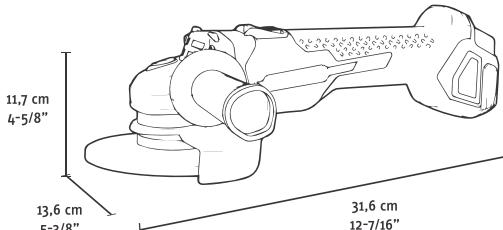

Configuration
FB20ID3AB-24B



Art.	Battery	Battery charger
FB20AG3AB-12B	1 x 2 Ah, 20 V	2 A, 20 V
FB20AG3AB-14B	1 x 4 Ah, 20 V	4 A, 20 V
FB20AG3AB-22B	2 x 2 Ah, 20 V	2 A, 20 V
FB20AG3AB-24B	2 x 4 Ah, 20 V	4 A, 20 V
FB20AG3AB-B	Not included	Not included

FB20IS3AB-K**IMPACT SCREWDRIVER 20V**


Brushless motor, 1/4" hexagonal tool holder, Electronic speed adjustment, Step speed selection, Reverse rotation, Built-in LED light (4 lights), Belt clip, Variable torque: 35 Nm / 130 Nm / 200 Nm / 260 Nm, Additional anti-vibration hook for 4 Ah battery, Magnesium head for better heat dissipation, Efficient ventilation system for engine cooling.




No-load speed	0-2100 min-1
Impact rate	0-3200 min-1
Torque	35 / 130 / 200 / 260 Nm
Tool holder	1/4" hex
Min - max bolt / nut Ø	M12 - M22
Battery	Not included
Battery charger	Not included

**FB20IW3AB-K****IMPACT WRENCH 20V**

Brushless motor, 1/2" square tool holder, Electronic speed adjustment, Step speed selection, Reverse rotation, Built-in LED light (4 lights), Belt clip, Variable torque: 35 Nm / 130 Nm / 200 Nm / 300 Nm, Additional anti-vibration hook for 4Ah battery, Magnesium head for better heat dissipation, Efficient ventilation system for engine cooling



No-load speed	0-2100 min-1
Impact rate	0-3200 min-1
Torque	35 / 130 / 200 / 300 Nm
Tool holder	1/2" square
Min - max bolt / nut Ø	M12 - M22
Battery	Not included
Battery charger	Not included

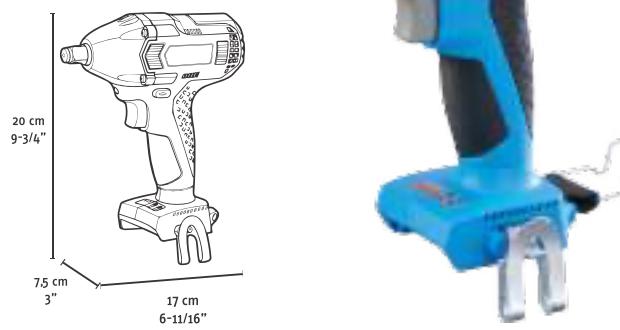**FB20IW6AB-K****PULSE WRENCH**

Brushless motor, 1/2" square tool holder, Electronic speed adjustment, Step speed selection, Reverse rotation, Built-in LED light (4 lights), Belt clip, Variable torque: 300 Nm / 400 Nm / 500 Nm / 550 Nm, Additional anti-vibration hook for 4Ah battery, Magnesium head for better heat dissipation, Efficient ventilation system for engine cooling



No-load speed	0-2700 min-1
Impact rate	0-3500 min-1
Torque	300 - 400 - 500 - 550 Nm
Tool holder	1/2" square
Min - max bolt / nut Ø	M14 - M28
Battery	Not included
Battery charger	Not included





**FB20GS3AB-K**

NEW

RECIPROCATING SAW 20V


Electronic speed control, soft D-shaped handle, rotatable handle.

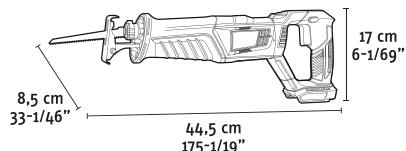

No-load speed	0-2800 min-1
Blade stroke length	26 mm
Cutting depth in wood	115 mm
Cutting depth in steel	5/60 mm (Profile/Pipe)
Battery	Not included
Battery charger	Not included

FB20AM3AB-K

NEW

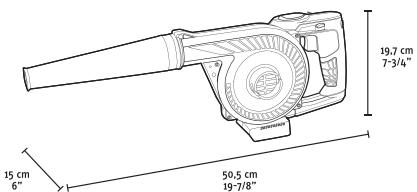AIR MOVERVacuum cleaner-blower, Variable speed, 2 functions (vacuuming-blowing), Lock-on
Soft grip, Vacuum bag included.


No-load speed	0-18000 min-1
Air stream	2,56 m ³ /min
Wind speed	63,5 m/s
Battery	Not included
Battery charger	Not included

FB20LL3AX-K**WORK LIGHT 20V**

270° swivel head, Soft rubber grip, Belt clip, Luminous flux 250 lm.



LED power	3 W
Luminous flux	250 lm
Autonomy	~12 h (2 Ah) / ~24 h (4 Ah)
Battery	Not included
Battery charger	Not included



**FB20BC3A2-K****BATTERY CHARGER 2A 20V**

Compatible with Fervi FB20LB3A2 and FB20LB3A4 batteries.



Box

Power	55 W
Output voltage	20 V
Output current	2 A
Recharging time	60 min. (FB20LB3A2) / 120 min. (FB20LB3A4)

FB20BC3A4-K**CHARGER 4A 20V**Compatible with Fervi FB20LB3A2 and FB20LB3A4 batteries.
Fan-powered ventilated quick charge.

Box

Power	100 W
Output voltage	18 - 20 V Max.
Output current	4 A
Recharging time	35 min. (FB20LB3A2) / 60 min. (FB20LB3A4)

FB20LB3A2-E**BATTERY 2AH 20V**Compatible with all items in the Fervi F20V Range line.
Compatible with Fervi FB20BC3A2 and FB20BC3A4 chargers.

Blister


Battery type	Li-Ion
Voltage	20 V
Capacity	2 Ah
Recharging time	60 min. (FB20BC3A2) / 35 min (FB20BC3A4)

FB20LB3A4-E**BATTERY 4AH 20V**Compatible with all items in the Fervi F20V Range line.
Compatible with Fervi FB20BC3A2 and FB20BC3A4 chargers.

Blister

Battery type	Li-Ion
Voltage	20 V
Capacity	4 Ah
Recharging time	120 min. (FB20BC3A2) / 60 min (FB20BC3A4)

F20V RANGE**Charging Times!****FB20BC3A2-K**
20V - 2Ah**60 minutes****FB20BC3A4-K**
20V - 4Ah**35 minutes****FB20LB3A2-E**
20V - 2Ah**120 minutes****FB20LB3A4-E**
20V - 4Ah**60 minutes**

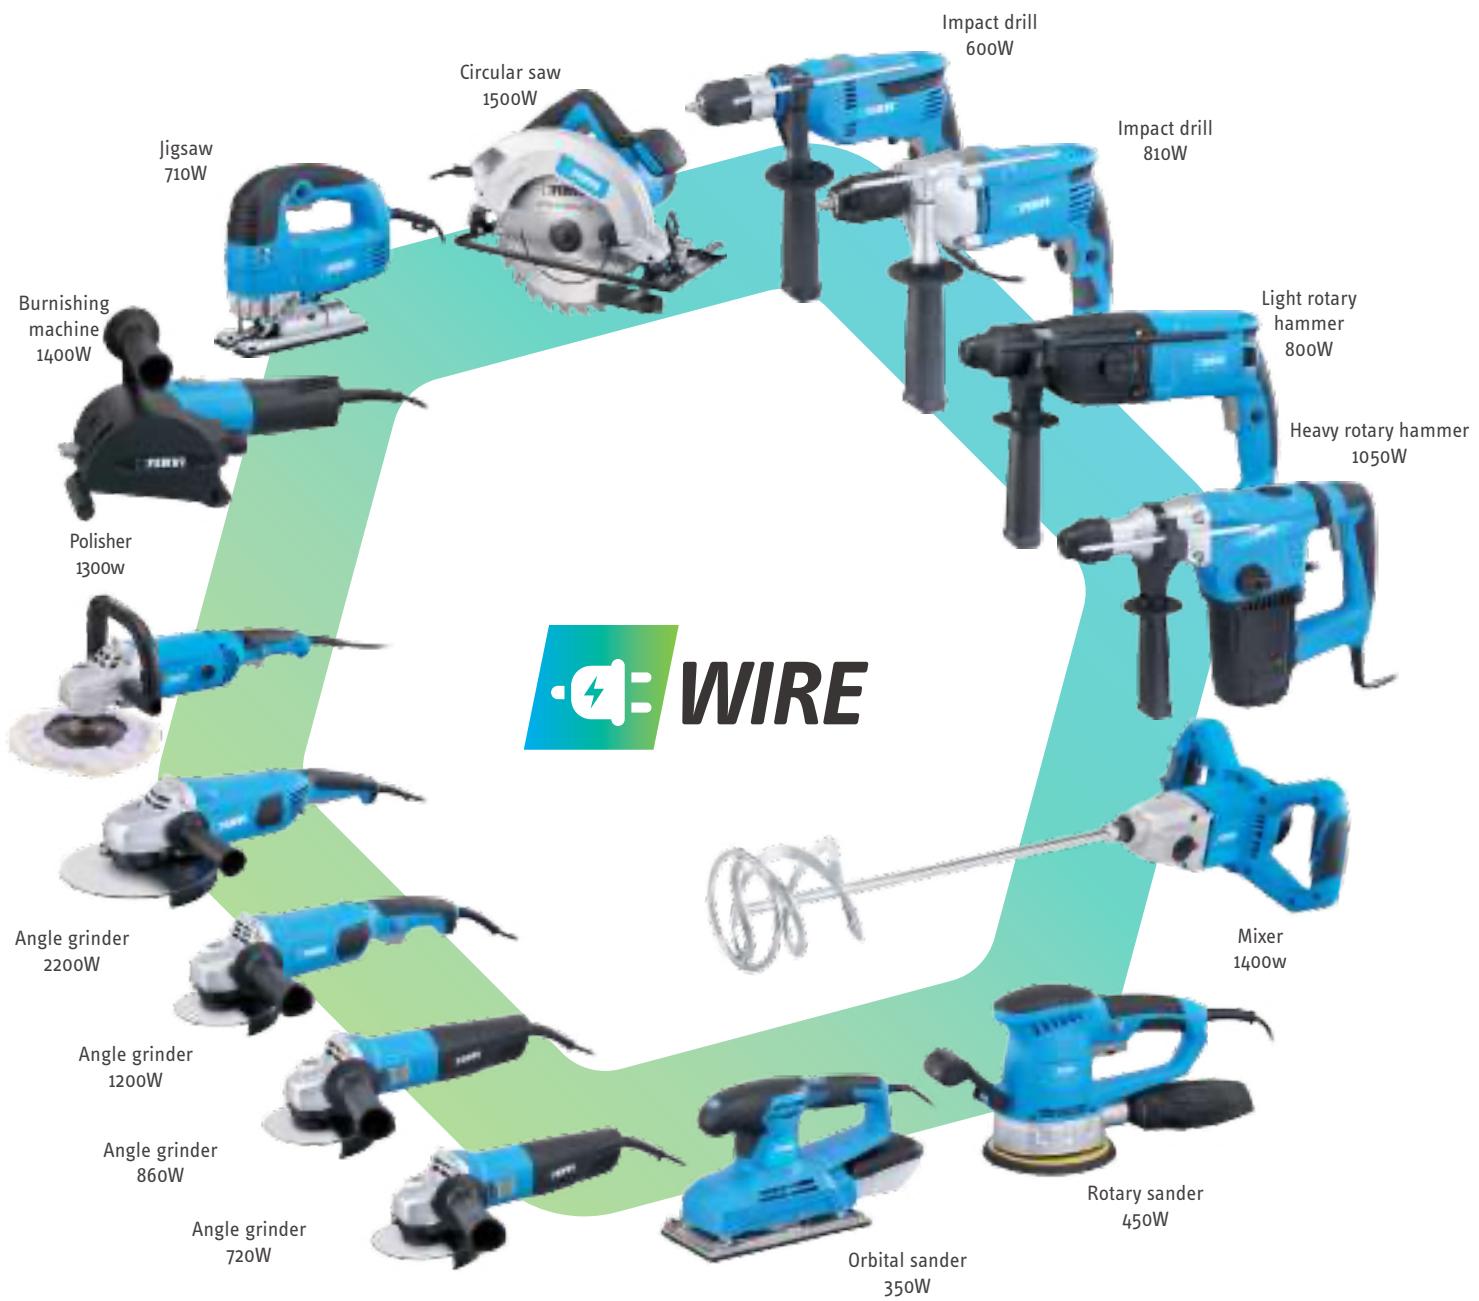


High Price/Performance ratio

Ergonomics and lightweight

Full line

FFID06003A-K**IMPACT DRILL 600W**

2-steps-lock keyless self-tightening chuck, Variable speed, Electronic speed adjustment, 2 modes: drilling / Impact drilling, Reverse rotation, Lock-on function for increased comfort during extended work mode, Non-slip soft rubber grip, Depth stop and additional handle included.



Box



2 Functions



Variable Speed



Keyless



Electronic Speed



Reverse



Lock-On

Power

600 W

Amperage at 220-230V

2,8 A

No-load speed

0-2800 min-1

Impact rate

0-44800 min-1

Chuck tightening range

2 - 13 mm

Drilling output concrete

Max 13 mm

Drilling output steel


Max 13 mm

Drilling output wood

Max 20 mm

FFID08103A-K**IMPACT DRILL 810W**

Metal keyless self-tightening chuck, Variable speed, Electronic speed adjustment, 2 modes: drilling / Impact drilling, Reverse rotation, Lock-on function for increased comfort during extended work mode, Non-slip soft rubber grip, Depth stop and additional handle included.



Box



2 Functions



Variable Speed



Keyless



Electronic Speed



Reverse



Lock-On

Power

810 W

Amperage at 220-230V

3,9 A

No-load speed

0-2800 min-1

Impact rate

0-44800 min-1

Chuck tightening range

2 - 13 mm

Drilling output concrete

Max 16 mm

Drilling output steel


Max 13 mm

Drilling output wood

Max 30 mm

**FFRH08003A-B****LIGHT ROTARY HAMMER 800W**


SDS-Plus chuck, Extra gear rim chuck with SDS-Plus adapter, Electronic speed adjustment, 3 modes: drilling / impact drilling / chiselling, Vario-lock mode, Reverse rotation, Safety clutch to prevent motor damages and overloads, Lock-on function for increased comfort during extended work mode, Soft rubber grip, Depth stop, additional handle, 3 bits, pointed and flat chisels, additional chuck and flange wrench included.

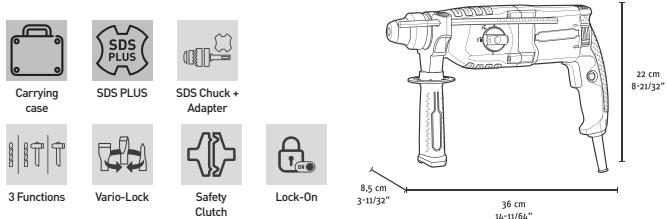

Power	800 W
Amperage at 220-230V	3,8 A
No-load speed	0-1200 min-1
Impact rate	0-5300 min-1
Percussion force	3,4 J
Chuck sizes	SDS-Plus
Drilling output concrete	Max 26 mm
Drilling output steel	Max 13 mm
Drilling output wood	Max 40 mm

FFRH10503A-B**HEAVY ROTARY HAMMER 1050W**



SDS-Plus chuck, Electronic speed adjustment, 3 modes: drilling / impact drilling / chiselling, Anti-vibrations system, Safety clutch to prevent motor damages and overloads, Soft rubber grip, Depth stop, additional handle, 3 bits, pointed and flat chisels, dust collector, container with lubricant, flange wrench included.

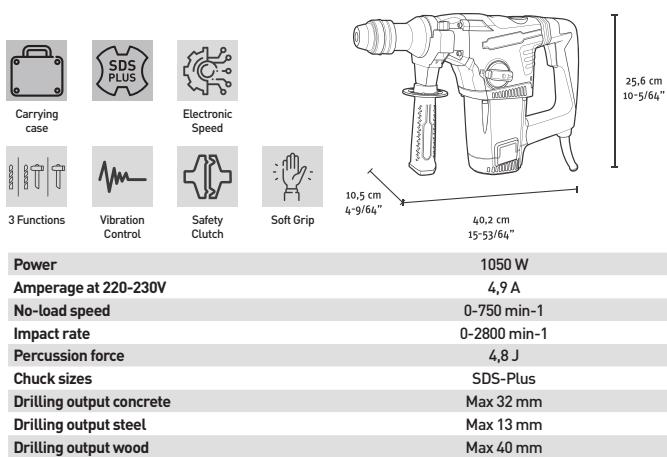**FFMI14003V-K**

NEW

MIXER 1400W 140MM

M14 thread, Soft start, Variable speed, Speed selector, Lock-on, Soft grip, Mixing tool included.

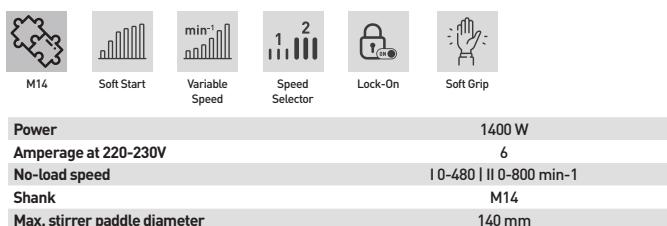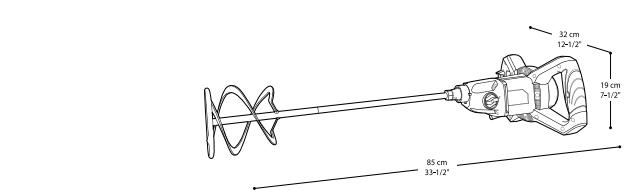

FFAG07203A-115K**ANGLE GRINDER 115MM 720W**

M14 spindle thread, Soft start, Spindle lock, Restart protection, Two-position on/off slide switch with lock, Small-size soft rubber grip, Motor ECU to avoid rotor and stator overload, Flange wrench, additional handle, protection guard included.



Box



M14



Soft Start



Arbor Lock



Restart Protection



2-Position Switch



Soft Grip



Constant Speed

Power	720 W
Amperage at 220-230V	3,3 A
Speed	0-11000 min-1
Shank	M14
Max Ø of cutting disc	115 mm
Max Ø of grinding disc	115 mm
Max Ø of rubber sanding plate	115 mm
Max Ø of circular wire brush	75 mm
Max Ø of cup wire brush	75 mm

FFAG07803A-115K**ANGLE GRINDER 115MM 780W**

M14 spindle thread, Soft start, Spindle lock, Restart protection, Two-position on/off slide switch with lock, Small-size soft rubber grip, Motor ECU to avoid rotor and stator overload, Flange wrench, additional handle, protection guard included.



Box



M14



Soft Start



Arbor Lock



Restart Protection



2-Position Switch



Soft Grip



Angle grinder

Power	780 W
Amperage at 220-230V	3,4 A
Speed	0-11000 min-1
Shank	M14
Max Ø of cutting disc	115 mm
Max Ø of grinding disc	115 mm
Max Ø of rubber sanding plate	115 mm
Max Ø of circular wire brush	75 mm
Max Ø of cup wire brush	75 mm

FFAG08603A-125K**ANGLE GRINDER 125MM 860W**

M14 spindle thread, Soft start, Spindle lock, Restart protection, Two-position on/off slide switch with lock, Small-size soft rubber grip, Motor ECU to avoid rotor and stator overload, Flange wrench, additional handle, protection guard included.



Box



M14



Soft Start



Arbor Lock



Restart Protection



2-Position Switch



Soft Grip

Power	860 W
Amperage at 220-230V	3,9 A
Speed	0-11000 min-1
Max Ø of cutting disc	125 mm
Max Ø of grinding disc	125 mm
Max Ø of rubber sanding plate	125 mm
Max Ø of circular wire brush	75 mm
Max Ø of cup wire brush	75 mm

FFAG12003V-125K**ANGLE GRINDER 125MM 1200W**

M14 spindle thread, Soft start, Variable speed, Spindle lock, Restart protection, Lock-off function, Small-size soft rubber grip, Large air vents, Quick-access carbon brush inspection compartment, Flange wrench, additional handle, protection guard included.



Box



M14



Soft Start



Variable Speed



Lock-Off




Soft Grip

Power	1200 W
Amperage at 220-230V	5,4 A
Speed	0-11000 min-1
Shank	M14
Max Ø of cutting disc	125 mm
Max Ø of grinding disc	125 mm
Max Ø of rubber sanding plate	125 mm
Max Ø of circular wire brush	75 mm
Max Ø of cup wire brush	75 mm

**FFAG22003A-230K****ANGLE GRINDER 230MM 2200W**

M14 spindle thread, Soft start, Spindle lock, Restart protection, Lock-off function, Small-size soft rubber grip, Motor ECU to avoid rotor and stator overload, 3-positions additional handle, Large air vents and front airflow, 8 mm rubber cable, Flange wrench, additional handle, protection guard included.

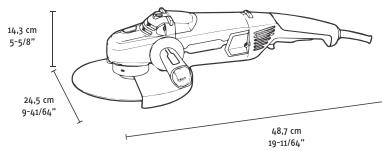

Power	2200 W
Amperage at 220-230V	10,0 A
Speed	0-6500 min-1
Shank	M14
Max Ø of cutting disc	230 mm
Max Ø of grinding disc	230 mm
Max Ø of rubber sanding plate	230 mm
Max Ø of circular wire brush	100 mm
Max Ø of cup wire brush	100 mm

FFOP16003V-K**POLISHER 1300W 150MM**



M14 thread, Velcro system, Lock-on, Shaft lock, Constant speed, Variable speed, Soft backing pad, Velcro backing pad, wool cloth and Velcro abrasive disc included.



Power	1300 W
Amperage at 220-230V	6,5 A
Speed	400 - 3000 min-1
Shank	M14
Max Ø of rubber sanding plate	180 mm

FFSF14003A-110K**BURNISHING MACHINE 110 MM 1400 KW**

Variable speed, Rotation speed stabilization system at both an idle and under load, Soft start, Spindle lock, Restart protection, Two-position on/off switch with locking system, Brush depth adjustment system with protective casing, Additional handle, protective casing, vacuum cleaner adapter, allen key included.



Power	1400 W
Amperage at 220-230V	6,6 A
Speed	1000-4000 min-1
Spindle diameter	19 mm
Max Ø of brush	110 mm
Max width of brush	100 mm

FFJS07103A-K**JIGSAW 710 KW**

Stroke rate regulation, Angular adjustment, 4-stage pendulum, Saw blade quick change with blade defense, Lock-on function, Metal gears, Front airflow for a cleaner cut, Ideal for plunge cuts, Saw blade, wing screw for guide bar, locating pin, allen key, guide for parallel / circle cutting included.



Power	710 W
Amperage at 220-230V	3,1 A
Stroke rate at no-load	700-3000 min-1
Stroke length	26 mm
Cutting depth in wood	85 mm
Cutting depth in aluminium	20 mm
Cutting depth in steel	10 mm
Cutting angle	Max +45° / -45°



FFCS15003A-190K

CIRCULAR SAW 1500 KW

Cutting depth adjustment, Angular adjustment, Lock-off function, Dust extraction system with exhaust pipe, Operator protection, Soft rubber grip, Blade, wrench, parallel guide included.



Box



Angle Adjustment




Lock-Off



Depth Adjustment



Dust Extraction



Power

1500 W

Amperage at 220-230V

6,8 A

No-load speed

5500 min-1

Min / max Ø blade

185 / 190 mm

Hole diameter

20 mm

Blade thickness

2 mm

Cutting Depth

Max 66 mm (90°) / 46 mm (45°)

FFOS03503A-K

ORBITAL SANDER 350W

Clamp-lever fixing system, Variable speed, Dust extraction system with container / compatible with vacuum cleaner, Rear soft rubber D-handle, Filter cleaning system, 3 pcs sandpaper and dust container included.



Box



Soft Grip



Belt Hook




Variable Speed



D-Handle



Dust Extraction



Power

350 W

Amperage at 220-230V

1,5 A

No-load speed

6000-11000 min-1

No-load oscillation rate

12000-22000 min-1

Eccentricity

2,5 mm

Sanding paper size

115 x 280 mm

Sanding surface size

115 x 230 mm

FFRS04503A-150K

ROTARY SANDER 150MM 450W

Velcro fixing system, Variable speed, Lock-on function for increased comfort during extended work mode, Dust extraction system with bag / compatible with vacuum cleaner, Rear soft rubber D-handle, Adjustable front handle, 3 pcs sandpaper [grit 60, 80, 120] and dust bag included.



Box



Soft Grip



Velcro System



Variable Speed




D-Handle



Lock-On



Dust Extraction



Power

450 W

Amperage at 220-230V

1,9 A

No-load speed

4000 min-1 / 13000 min-1

No-load oscillation rate

8000-26000 min-1

Eccentricity

2 mm

Sanding plate Ø

150 mm

Holes

8

0149**HEAVY DUTY STAPLE GUN TACKER**

With 500 staples and 500 nails.



Blister

C586**AIR BRAD NAILER**

Carrying case

Loader capacity	120
Working pressure	5 - 7 bar
Dimensions	260 x 240 x 65 mm
Nails	F - 10 / 50 mm
Air inlet	1/4"
Net weight	1,3 kg

F588/6**AIR BRADDER FOR MINI PINS**

Carrying case

Loader capacity	195
Working pressure	5 - 7 bar
Dimensions	235 x 198 x 46 mm
Staples	0,60 - 12 / 25 mm
Air inlet	1/4"
Net weight	1 kg

F585**2 IN 1 AIR STAPLER AND BRAD NAILER**

Carrying case

Loader capacity	100
Working pressure	5 - 7 bar
Dimensions	255 x 230 x 67 mm
Nails	F - 15 / 50 mm
Staples	90 - 10 / 40 mm
Air inlet	1/4"
Net weight	1,4 kg

0587**AIR STAPLER**

Carrying case

Loader capacity	100
Working pressure	5 - 7 bar
Dimensions	225 x 165 x 45 mm
Staples	80 - 6 / 16 mm
Air inlet	1/4"
Net weight	0,9 kg

0585**2 IN 1 AIR STAPLER AND BRAD NAILER**

Carrying case

Loader capacity	80
Working pressure	5 - 7 bar
Dimensions	245 x 230 x 55 mm
Nails	F - 10 / 50 mm
Staples	90 - 10 / 40 mm
Air inlet	1/4"
Net weight	1,4 kg

**0586****AIR BRAD NAILER**

Carrying case

Loader capacity	110
Working pressure	5 - 7 bar
Dimensions	245 x 225 x 55 mm
Nails	F - 10 / 50 mm
Air inlet	1/4"
Net weight	1,5 kg

C589**AIR PALM NAILER**

Box

Working pressure	5 - 7 bar
Dimensions	111 x 115 x 70 mm
Nails	ø 2.5 ÷ 4.1 - head ø 6.3 ÷ 8.7 - length 38 ÷ 90 mm
Air inlet	1/4"
Net weight	0,5 kg

0588/6**AIR BRADDER FOR MINI PINS**

Carrying case

Loader capacity	130
Working pressure	5 - 7 bar
Dimensions	225 x 170 x 45 mm
Staples	0,60 - 12 / 30 mm
Air inlet	1/4"
Net weight	1 kg



AP01

AIR IMPACT WRENCH

Professional series. In composite material, handle and head in shockproof rubber. Operating lever, change of rotation and speed adjustment operated with one hand. High power and great reliability.



Speed	8500 rpm
Torque	542 Nm 400 lb-ft
Avg air cons.	108 L/min 3.8 SCFM
Working pressure	6 bar 90 psi
Air inlet	1/4"
Net weight	1,2 kg

AP02

AIR IMPACT WRENCH

Professional series. In composite material, handle and head in shockproof rubber. Operating lever, change of rotation and speed adjustment operated with one hand. High power and great reliability.



Speed	7800 rpm
Torque	678 Nm 500 lb-ft
Avg air cons.	136 L/min 4.8 SCFM
Working pressure	6 bar 90 psi
Air inlet	1/4"
Net weight	1,2 kg

AP03

AIR IMPACT WRENCH

Professional series. In composite material, handle and head in shockproof rubber. Operating lever, change of rotation and speed adjustment operated with one hand. High power and great reliability.



AP04

AIR IMPACT WRENCH

Professional series. In composite material, handle and head in shockproof rubber. Operating lever, change of rotation and speed adjustment operated with one hand. High power and great reliability.



Speed	7300 rpm
Torque	1085 Nm 800 lb-ft
Avg air cons.	153 L/min 5.4 SCFM
Working pressure	6 bar 90 psi
Air inlet	1/4"
Net weight	2 kg

AP05**AIR IMPACT WRENCH**

Professional series. In composite material, handle and head in shockproof rubber. Operating lever, change of rotation and speed adjustment operated with one hand. High power and great reliability.



Speed	5300 rpm
Torque	1900 Nm 1400 lb·ft
Avg air cons.	224 L/min 8.1 SCFM
Working pressure	6 bar 90 psi
Air inlet	3/8"
Net weight	3,3 kg

AP05/150**AIR IMPACT WRENCH**

With 150mm Anvil professional series. In composite material, handle and head in shockproof rubber. Operating lever, change of rotation and speed adjustment operated with one hand. High power and great reliability.



Speed	5300 rpm
Torque	1900 Nm 1400 lb·ft
Avg air cons.	224 L/min 8.1 SCFM
Working pressure	6 bar 90 psi
Air inlet	3/8"
Net weight	4 kg

AP06**AIR IMPACT WRENCH**

Professional series. In composite material, handle and head in shockproof rubber. Operating lever, change of rotation and speed adjustment operated with one hand. High power and great reliability.



Speed	9000 rpm
Torque	312 Nm 230 lb·ft
Avg air cons.	113 L/min 4 SCFM
Working pressure	6 bar 90 psi
Air inlet	1/4"
Net weight	1,1 kg



0571**AIR IMPACT WRENCH**

Speed	7000 rpm
Torque	610 Nm
Avg air cons.	5 SCFM (150 L/min)
Working pressure	6 bar / 90 psi
Air inlet	1/4"
Net weight	2,6 kg

0576**AIR IMPACT WRENCH**

Speed	7000 rpm
Torque	435 Nm
Avg air cons.	5 SCFM (150 L/min)
Working pressure	6 bar / 90 psi
Shank	1/4"
Net weight	2,5 kg

0786**AIR IMPACT WRENCH**

Speed	4200 rpm
Torque	950 Nm
Avg air cons.	8 SCFM (240 L/min)
Working pressure	6 bar / 90 psi
Air inlet	1/4"
Net weight	4,8 kg

0044**AIR IMPACT WRENCH SET**

With 10 wrenches, a wrench extension, 1/4" nozzle.



Speed	7000 rpm
Torque	320 Nm
Socket	9-10-11-13-14-17-19-22-24-27 mm
Extension	125 mm
Avg air cons.	5 SCFM (150 L/min)
Working pressure	6 bar / 90 psi
Sound pressure level	84,4 ± 2,94 dB(A)
Level vibration transmitted to hand-arm	8,53 ± 2,05 m/s ²
Air inlet	1/4"
Net weight	4 kg

0045**AIR IMPACT WRENCH**

Speed	7000 rpm
Torque	320 Nm
Avg air cons.	5 SCFM (150 L/min)
Working pressure	6 bar / 90 psi
Air inlet	1/4"
Net weight	2,3 kg

0052**AIR IMPACT WRENCH**

Speed	4800 rpm
Torque	680 Nm
Avg air cons.	6 SCFM (180 L/min)
Working pressure	6 bar / 90 psi
Air inlet	1/4"
Net weight	4,7 kg

**0413****MINI AIR DIE GRINDER**

Collet 3mm and 6mm, revolving rear air outlet, body frame made from composite material.



Box

Pliers	Ø 3 mm - Ø 6 mm
Speed	25000 rpm
Avg air cons.	4 SCFM (113 L/min)
Working pressure	6 bar / 90 psi
Air inlet	1/4"
Net weight	0,4 kg

0414**AIR DIE GRINDER**

Collet 3mm and 6mm, revolving rear air outlet, body frame made from composite material.



Box

Pliers	Ø 3 mm - Ø 6 mm
Speed	22000 rpm
Avg air cons.	7 SCFM (198 L/min)
Working pressure	6 bar / 90 psi
Air inlet	1/4"
Net weight	0,6 kg

0050**AIR DIE GRINDER SET**

Collet 3mm and 6mm, revolving rear air outlet, body frame made from composite material.



13 Pcs



Carrying case

Pliers	Ø 3 mm - Ø 6 mm
Mounted stone	10 Pcs
Speed	25000 rpm
Avg air cons.	4 SCFM (120 L/min)
Working pressure	6 bar / 90 psi
Air inlet	1/4"
Net weight	1,2 kg

0416**90° AIR DIE GRINDER**

Collet 3mm and 6mm, revolving rear air outlet, body frame made from composite material.



Box

Pliers	Ø 3 mm - Ø 6 mm
Speed	20000 rpm
Avg air cons.	4 SCFM (113 L/min)
Working pressure	6 bar / 90 psi
Air inlet	1/4"
Net weight	0,5 kg

0417**LONG TYPE AIR DIE GRINDER**

Collet 3mm and 6mm, revolving rear air outlet, body frame made from composite material.



Box

Pliers	Ø 3 mm - Ø 6 mm
Length	295 mm
Speed	20000 rpm
Avg air cons.	4 SCFM (113 L/min)
Working pressure	6 bar / 90 psi
Air inlet	1/4"
Net weight	0,6 kg

0418**REVERSIBLE AIR DRILL**

Chuck 10 Ø mm, with rear exhaust 360°,composite body design.



Box

Chuck sizes	Ø 10 mm
Speed	1800 rpm
Avg air cons.	4 SCFM (113 L/min)
Working pressure	6 bar / 90 psi
Air inlet	1/4"
Net weight	0,9 kg

**0339****REVERSIBLE AIR DRILL**

Gear rim chuck.



Box

Chuck sizes	Ø 10 mm
Speed	1800 rpm
Avg air cons.	5 SCFM (150 L/min)
Working pressure	6 bar / 90 psi
Air inlet	1/4"
Net weight	1,1 kg

0047**REVERSIBLE AIR SCREWDRIVER**

Box

1/4"

Speed	9000 rpm
Screw	4 - 5 mm
Torque	2,3 - 6,8 Nm
Length	180 mm
Avg air cons.	5 SCFM (150 L/min)
Working pressure	6 bar / 90 psi
Air inlet	1/4"
Net weight	0,8 kg

0313**AIR ANGLE DIE GRINDER**

Box

Saw blade	Ø 125 mm
Speed	10000 rpm
Avg air cons.	5 SCFM (150 L/min)
Working pressure	6 bar / 90 psi
Air inlet	1/4"
Net weight	2 kg

0574**3/8" REVERSIBLE AIR DRILL**

Keyless chuck.



Box

Chuck sizes	Ø 10 mm
Speed	1800 rpm
Avg air cons.	5 SCFM (150 L/min)
Working pressure	6 bar / 90 psi
Air inlet	1/4"
Net weight	1,1 kg

0046**AIR RATCHET WRENCH SET**

With 7 sockets, a fixed 75 mm extension for sockets, a 75 mm extension with joint for sockets, 1/4" nozzle, three screwdriver bits and a fixed 75 mm extension for screwdriver bits.



16 Pcs



Carrying case



1/2"

Speed	160 rpm
Torque	65 Nm
Socket	9-10-11-13-14-17-19 mm
Extension	75 mm
Universal joint	1/2"
Bit holder	1/4"
Avg air cons.	4 SCFM (120 L/min)
Working pressure	6 bar / 90 psi
Air inlet	1/4"
Net weight	2,6 kg

0644**PNEUMATIC AXIAL GRINDING WHEEL**

Carrying case

Saw blade	Ø 75 x 1,5 x Ø 10 mm
Speed	15000 rpm
Avg air cons.	5 SCFM (150 L/min)
Working pressure	6 bar / 90 psi
Air inlet	1/4"
Net weight	0,7 kg

**0419****6" AIR ORBIT SANDER WITH SUCTION**

And speed control, hook & loop pad, 360° rear exhaust, die cast aluminum body with soft handle grip in lightweight and ergonomic design.



Box

Disc diameter	150 mm - 6"
Orbit	5 mm, 3/16"
Speed	10500 rpm MAX.
Avg air cons.	3 SCFM (85 L/min)
Working pressure	6 bar / 90 psi
Air inlet	1/4"
Length	200 mm
Net weight	1 kg

0421**6" AIR ORBIT SANDER WITH SELF-INTEGRATED SUCTION**

Speed adjustment, rotating rear air exhaust, aluminum body, and soft, ergonomic handle. Suction tube and dust collection bag.



Box

Disc diameter	150 mm - 6"
Orbit	5 mm, 3/16"
Speed	10500 rpm
Avg air cons.	3 SCFM (85 L/min)
Working pressure	6 bar / 90 psi
Air inlet	1/4"
Length	200 mm
Net weight	1 kg

0458**6" AIR ORBIT SANDER WITH SUCTION**

Speed adjustment, hook-and-loop pad support, rotating rear air exhaust, lightweight aluminum body with a soft, ergonomic handle.



Box

Disc diameter	150 mm - 6"
Orbit	2,5 mm - 3 / 32"
Max speed	10500 rpm
Avg air cons.	3 SCFM (85 L/min)
Working pressure	6 bar / 90 psi
Air inlet	1/4"
Length	200 mm
Net weight	1 kg

0460**6" AIR ORBIT SANDER WITH SELF-INTEGRATED SUCTION**

Speed adjustable, revolving rear air outlet, aluminum body, soft and ergonomic handle, Suction tube and dust collection bag.



Box

Disc diameter	150 mm - 6"
Orbit	2,5 mm - 3 / 32"
Max speed	10500 rpm
Avg air cons.	3 SCFM (85 L/min)
Working pressure	6 bar / 90 psi
Air inlet	1/4"
Length	200 mm
Net weight	1 kg

0641**FLEXIBLE PNEUMATIC MICROGRINDING WHEEL**

For grinding and chamfering.



15 Pcs



Carrying case

Collet capacity	3 mm
Speed	56000 rpm
Avg air cons.	2 SCFM (60 L/min)
Working pressure	6 bar / 90 psi
Air inlet	1/4"
Net weight	0,7 kg

0784**AIR BELT SANDER**

With spare belts. Light metal body.



Box

Speed	18000 rpm
Avg air cons.	4 SCFM (113 L/min)
Working pressure	6 bar / 90 psi
Belt	10 x 330 mm
Air inlet	1/4"
Net weight	0,75 kg

0059**HEAVY DUTY AIR HAMMER WITH 4 HEXAGONAL CHISELS**

5 Pcs

Box



Speed	BPM 3500	Working pressure	6 bar / 90 psi
Bore-stroke	19 x 66 mm 3/4" x 2 5/8"	Air inlet	1/4"
Avg air cons.	4,5 SCFM (135 L/min)	Net weight	1,5 kg

W021PA**BLOW GUN**

Blister

Alu



Nozzle	2.0 mm
Working pressure	2 - 6 bar
Air inlet	1/4"

W021PN**WASHING GUN**

With aluminium body and steel cup.



Box



Capacity	900 ml
Nozzle	4.5 mm
Working pressure	3 - 4 bar
Air inlet	1/4"

**0049****OILER**

For pneumatic tools.



Blister

1/4"

**W021PG**
TYRE INFLATING GUN

Blister

Alu

Max. pressure	12 bar (170 psi)
Working pressure	2 - 4 bar (30 - 60 psi)
Accuracy	±1%
Rubber hose length	440 mm
Air inlet	1/4"

**0607****BLOW GUN**

Alu

Blister

Aluminum

Nozzle	2 mm
Working pressure	4 - 6 bar
Air inlet	1/4"

0608**TYRE INFLATING GUN**

Blister

Manometer	Ø 63 mm
Reading	0÷12 bar 0÷174 psi
Rubber hose length	420 mm
Air inlet	German-type rapid

0609**TYRE INFLATING GUN**

Tube length 1 m.



Box

Manometer	Ø 70 mm
Reading	0÷12 bar 0÷174 psi
Rubber hose length	1000 mm
Air inlet	1/4"

0725L**LONG NOSE BLOW GUN**

Blister

Hose length	275 mm
Air inlet	1/4"

0125**DIGITAL TYRE GAUGE**

With backlight and various measurement units. Equipped with tyre valve screwdriver.



Blister

Max. pressure	8 bar / 110 psi
Working pressure	2 - 4 bar (30 - 60 psi)
Reading	0,05 bar 0,7 psi
Not included batteries	2 x 1.5V AAA
Air inlet	1/4"

0610**WASHING GUN**

Box

Capacity	1000 cc
Air inlet	1/4"

0725**BLOW GUN**

Blister

Hose length	100 mm
Air inlet	1/4"

0412**BLOW GUN**

High quality, with chromed steel 100mm. Nozzle gun body in POM plastic (Polyoxymethylene). Brass valve.



Blister

Hose length	100 mm
Air inlet	1/4"

TH601A**GRAVITY FEED SPRAY GUN**

600 ml feed HVLP spray gun, nylon gravity cup, made with CNC machine, without O-ring, with stainless steel nozzle and needle, brass air cap, alum clamp and knobs. HVLP = high volume, low pressure.



INOX



Box

INOX

Chromed

Capacity	600 ml
Nozzle diameter	Ø 1,3 mm
Fluid delivery	130 ml/min
Working pressure	2 bar (29 PSI)
Working range	200 mm
Pattern	280 - 300 mm
Air inlet	1/4"
Net weight	0,5 kg

TH901A**GRAVITY FEED SPRAY GUN**

600 ml feed LVMP spray gun, nylon gravity cup, made with CNC machine, without O-ring, with stainless steel nozzle and needle, brass air cap, alum clamp and knobs. LVMP = low volume, medium pressure.



INOX



Box

INOX

Chromed

Capacity	600 ml
Nozzle diameter	Ø 1,3 mm
Fluid delivery	140 ml/min
Working pressure	2 ÷ 2,2 bar (29 ÷ 32 PSI)
Working range	200 mm
Pattern	270 - 300 mm
Air inlet	1/4"
Net weight	0,5 kg

A601A**GRAVITY FEED SPRAY GUN**

600 ml feed HVLP spray gun, nylon gravity cup, made with CNC machine, without O-ring, with stainless steel nozzle and needle brass air cap, blue color alum clamp and knobs. HVLP = high volume, low pressure.



INOX



Box

INOX

Chromed

Nozzle diameter	Ø 1,4mm
Capacity	600 cc
Working pressure	2,5 - 3,5 bar
Air inlet	1/4"
Net weight	1 kg

TH602A**GRAVITY FEED SPRAY GUN**

100 ml feed HVLP spray gun, nylon gravity cup, made with CNC machine, without O-ring, with stainless steel nozzle and needle, brass air cap, alum clamp and knobs, male thread fitting 1/4" HVLP = high volume, low pressure.



INOX



Box

INOX

Chromed

Capacity	100 ml
Nozzle diameter	Ø 1 mm
Fluid delivery	50 ml/min
Working pressure	1,5 bar (20 PSI)
Working range	150 mm
Pattern	160 mm
Air inlet	1/4"
Net weight	0,3 kg

A601DS**SUCTION SPRAY GUN**

1000 ml suction HVLP spray gun with bayonet lock, aluminum cup, made with CNC machine, without O-ring, with stainless steel nozzle and needle brass air cap, alum clamp and knobs. HVLP = high volume, low pressure.



INOX



Box

INOX

Chromed

Nozzle diameter	Ø 1,4mm
Capacity	1000 cc
Working pressure	2,5 - 3 bar
Air inlet	1/4"
Net weight	1,1 kg

A602A**GRAVITY FEED SPRAY GUN**

100 ml feed HVLP spray gun, nylon gravity cup, made with CNC machine, without O-ring, with stainless steel nozzle and needle brass air cap, blue color alum clamp and knobs. HVLP = high volume, low pressure.



INOX



Box

INOX

Chromed

Nozzle diameter	Ø 1,0mm
Capacity	100 cc
Working pressure	2 - 2,5 bar
Air inlet	1/4"
Net weight	0,5 kg

**A901A****GRAVITY FEED SPRAY GUN**

600 ml feed LVMP spray gun, nylon gravity cup, made with CNC machine, without O-ring, with stainless steel nozzle and needle, brass air cap, blue color alum clamp and knobs. LVMP = low volume, medium pressure.



INOX



Box

INOX

Chromed

Capacity	600 ml
Nozzle diameter	Ø 1,4 mm
Fluid delivery	200-380 ml/min
Max. pressure	2-3 bar (30-43 PSI)
Air inlet	1/4"
Net weight	0,6 kg

A902A**GRAVITY FEED SPRAY GUN**

100 ml feed LVMP spray gun, nylon gravity cup, made with CNC machine, without O-ring, with stainless steel nozzle and needle brass air cap, blue color alum clamp and knobs. 1/4" LVMP = low volume, medium pressure.



INOX



Box

INOX

Chromed

Capacity	100 ml
Nozzle diameter	Ø 1 mm
Fluid delivery	45 - 65 ml/min
Max. pressure	1,5 - 2,5 bar (22 - 36 PSI)
Air inlet	1/4"
Net weight	0,3 kg

A162DS**SPRAY GUN WITH FLUID CUP PROVIDED WITH BAYONET LOCK**

Aluminum cover.



Alu

Box

Alu

Nozzle diameter	Ø 1,8 mm
Capacity	1000 cc
Working pressure	4 - 8 bar
Avg air cons.	100-200 L/min
Air inlet	1/4"
Net weight	0,9 kg

A162C**SPRAY GUN WITH FLUID CUP PROVIDED WITH RAPID LOCK**

Aluminum cover.



Alu

Box

Alu

Nozzle diameter	Ø 1,8 mm
Capacity	1000 cc
Working pressure	4 - 8 bar
Avg air cons.	100-200 L/min
Air inlet	1/4"
Net weight	0,8 kg

A162A**SPRAY GUN WITH GRAVITY FLOW CUP**

Box

Nozzle diameter	Ø 1,8 mm
Capacity	500 cc
Working pressure	4 - 8 bar
Avg air cons.	100-200 L/min
Net weight	0,5 kg

0048**MINI SPRAY GUN**

Fitting for pressurized air container and 1/4" fitting for air compressor.



7 Pcs

Box

TH250**PRESSURE REGULATOR**

With gauge for air tools.



Blister

Manometer	Ø 40 mm
Reading	0÷11 bar 0÷160 psi

**TH500****PRESSURE REGULATOR**

With gauge for air tools.



Blister

Manometer	Ø 30 mm
Reading	0÷10 bar 0÷145 psi

**0777/2****REDUCER WITH GAUGE AND FILTER**

Shank	1/4" - 3/8" - 1/2"
Reading	0÷10 bar 0÷140 psi

**0777/3****REDUCER WITH GAUGE, FILTER AND OILER**

Box

Shank	1/4" - 3/8" - 1/2"
Reading	0÷10 bar 0÷140 psi

**0785-XM****SET 2 PCS UNIVERSAL MALE QUICK COUPLER**

Art.	Shank
0785/1M	1/4"
0785/2M	3/8"

**0783-XM****SET 2 PCS OF GERMAN TYPE MALE PLUG**

Art.	Shank
0783/1M	1/4"
0783/2M	3/8"

**0785-XF****SET 2 PCS UNIVERSAL FEMALE QUICK COUPLER**


Art.	Shank
0785/1F	1/4"
0785/2F	3/8"

**0783-XF****2 PCS SET GERMAN TYPE FEMALE PLUG**

Art.	Shank
0783/1F	1/4"
0783/2F	3/8"

**S075-****POLYURETHANE SPIRAL HOSE WITH SWIVEL MALE FITTING**

Art.	Length	Diameter	Thread
S075/08X5	7,5 m	Ø 8 x 5 mm	1/4"
S075/10X6,5	7,5 m	Ø 10 x 6,5 mm	1/4"
S100/08X5	10 m	Ø 8 x 5 mm	1/4"
S100/10X6,5	10 m	Ø 10 x 6,5 mm	1/4"
S100/12X8	10 m	Ø 12 x 8 mm	1/4"

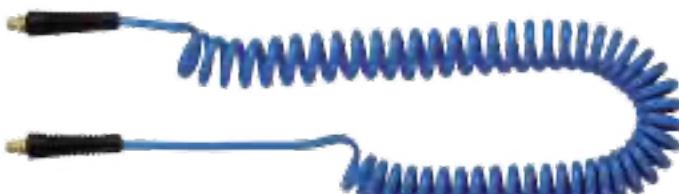


A481/10**AUTO REWIND AIR HOSE REEL**

Made of polypropylene shell, with polyurethane mesh hose and regulation for distributing evenly the tube in the internal part, tools free adjustable stop ball and 180° swivel mount bracket.



PP
Polyprop.




Max. pressure	17 bar / 250 psi
Hose length	10 + 1 m
Male Fitting	1/4" BSPT
Hose diameter	Ø 12 x 8 mm
Working temperature	0 ÷ 45° C
Net weight	2,65 kg

A481/15**AUTO REWIND AIR HOSE REEL**

Made of polypropylene shell, with polyurethane mesh hose and regulation for distributing evenly the tube in the internal part, tools free adjustable stop ball and 180° swivel mount bracket.



PP
Polyprop.



Max. pressure	17 bar / 250 psi
Hose length	15 + 1 m
Male Fitting	1/4" BSPT
Hose diameter	Ø 12 x 8 mm
Working temperature	0 ÷ 45° C
Net weight	4,1 kg

A481/15H**AUTO REWIND AIR HOSE REEL**

Made of polypropylene shell, with polyurethane mesh hose and regulation for distributing evenly the tube in the internal part, tools free adjustable stop ball and 180° swivel mount bracket.



PP
Polyprop.




Max. pressure	17 bar / 250 psi
Hose length	15 + 1 m
Male Fitting	3/8" BSPT
Hose diameter	Ø 13,5 x 9,5 mm
Working temperature	0 ÷ 45° C
Net weight	4,5 kg

A481/30H**AUTO REWIND AIR HOSE REEL**

Made of polypropylene shell, with polyurethane mesh hose and regulation for distributing evenly the tube in the internal part, tools free adjustable stop ball, low speed retraction system and 180° swivel mount bracket.



PP
Polyprop.



Max. pressure	17 bar / 250 psi
Hose length	30 + 2 m
Male Fitting	3/8" BSPT
Hose diameter	Ø 13,5 x 9,5 mm
Working temperature	0 ÷ 45° C
Net weight	9,5 kg

0378/1510**AUTO REWIND AIR HOSE REEL**

With pu mesh hose and regulation for distributing evenly the tube in the internal part.



PP
Polyprop.



Max. pressure	18 bar / 260 psi
Hose length	15 + 1 m
Male Fitting	3/8" BSPT
Hose diameter	Ø 13,5 x 9,5 mm
Working temperature	0 ÷ 45° C
Net weight	5 kg

B481/20**AUTO REWIND INDUSTRIAL AIR HOSE REEL**

NEW

Sturdy industrial steel frame, reinforced polyurethane hybrid tube, height-adjustable arm with anti-tangle system, tool-free adjustable stop ball.



Steel



Max. pressure	16 bar / 230 psi
Hose length	20 m
Male Fitting	1/4" BSPT
Hose diameter	Ø 9,5 x 15 mm
Working temperature	0 ÷ 45° C
Net weight	11,3 kg

**0793****WOOD-BURNING PEN SET WITH 6 PINS OF DIFFERENT SHAPE**

7 Pcs

Blister

Power

230 V 50 Hz 30 W

0031**HIGH PRECISION TEMPERATURE -CONTROLLED SOLDERING IRON STATION**

Adjustable temperature 150°C - 420°C, iron tip with hole ø 6 mm.



Box

Melting point

215°

Working temperature

215 ÷ 300°C

Max temperature

450°C

Power

230 V 50 Hz 37 W

**0033A****HIGH PRECISION TEMPERATURE -CONTROLLED SOLDERING IRON STATION**

Adjustable temperature 150-420°C, iron tip with hole Ø 6 mm.



Box

Melting point

215°

Working temperature

215 ÷ 300°C

Max temperature

420°C

Power station supply

230 V 50 Hz

Soldering power supply

24 V 48 W

0027/30W**SOLDERING IRON**

Blister

Power

230 V 50 Hz 30 W

Working temperature

450°C ± 10%

0027/40W**SOLDERING IRON**

Blister

Power

230 V 50 Hz 40 W

Working temperature

450°C ± 10%

0033A/TIP**SOLDERING IRON TIP SET**

4 Pcs

Hangable

0037**SOLDERING IRON COMBINATION SET**

Blister

Power

230 V 50 Hz 30 W

0027/40W/TIP**SOLDERING IRON TIP SET**

4 Pcs

Hangable

0037/TIP**SOLDERING IRON SPARE PART TIP**

Set of tips with hole Ø 6mm.



5 Pcs

Hangable

**0864****GAS SOLDERING IRON**

Tip and solder heads with protection cap and gas igniter.



Blister

Dimensions
Capacity

130 x 23 mm
8 ml

**0443****FAST HEATING SOLDERING GUN**

With adjustable temperature.



Carrying case

Power

Temperature

230 V 50 Hz 200 W

70 °C ÷ 500 °C

**0694****HOT AIR GUN SET**

At 2 temperatures, with spatula, scrapers and diffusers.



10 Pcs



Carrying case

Temperature

350 °C - 550 °C

Air stream

300 l/min - 500 l/min

Power

230 V 50 Hz 1 - 2 kW

**0865****ELECTRIC BARBECUE LIGHTER**

Lights charcoal on the barbecue or in the fireplace completely without chemicals and matchsticks. 600°C heat generated and sets charcoal on fire in approx. 30 - 60 seconds.



Box

Power
Temperature

230 V 50 Hz 2 kW
600°C

**0026****SOLDERING GUN**

With tin and a spare pointer.



Blister

Power



230 V 50 Hz 100 W

0443**HOT AIR GUN**

Box

Temperature

300 °C - 500 °C

Air stream

280 l/min - 480 l/min

Power

230 V 50Hz 1,5 kW

0444**DIGITAL HOT AIR GUN SET**

With electronic temperature control, lcd display to show the temperature, 2 levels of air flow, ideal for heating, folding, bending, removing paint.



6 Pcs



Box

Power

230 V 50 Hz 2 kW

Temperature

I 50°C - II 70°C ÷ 600°C - III 70°C ÷ 600°C

Air stream

I 300L/min - II 300L/min - III 500L/min

0865**0441****HOT KNIFE FOR POLYSTYRENE WITH ADJUSTABLE TEMPERATURE**

For polystyrene, plastic, foam and sponge, adjustable cutting length, metal stand.



Box

Power

230 V 50 Hz 220 W

Temperature

120 - 220 - 330 - 400 - 450 °C

Cutting capacity with adjustment

20 ÷ 90 mm

Max cut

150 mm

**0321****HOT KNIFE FOR POLYSTYRENE WITH ADJUSTABLE TEMPERATURE**

For polystyrene, plastic, foam and sponge, adjustable cutting length.



Box

Power	230 V 50 Hz 130 W
Temperature	Max 450 °C
Cutting capacity with adjustment	14 ÷ 97 mm
Max cut	120 mm

0333/150**SPARE BLADE**

For item 0333.

**0706****GLUE GUN TRIGGER FEED**

Carrying case

Power	230 V 40 W 300 °C
Glue stick	Ø 12 mm

0034**HOT MELT GLUE STICKS**

10 Pcs



Blister

Dimensions	Ø 12 x 200 mm Tot. 200 gr
------------	---------------------------

0333**HOT KNIFE FOR POLYSTYRENE WITH ADJUSTABLE TEMPERATURE**

For polystyrene, plastic, foam and sponge, adjustable cutting length, metal stand.



Carrying case

Power	230 V 50 Hz 150 W
Temperature	Max 500 °C
Max cut	150 mm

0431**GLUE GUN TRIGGER FEED**

Equipped with automatic advance and Led to signal connection to electric power.



Blister

Power	230 V 35 W 200 °C
Glue stick	Ø 12 mm
Glue flow	16 ÷ 20 g/min

0071**HOT MELT GLUE STICKS**

10 Pcs



Dimensions	Ø 12 x 200 mm Tot. 200 gr
------------	---------------------------

**0156-****FLEXIBLE OIL-CAN**

Art.	Capacity
0156/200	280 ml
0156/500	560 ml

0164/250**OILER WITH VERTICAL FLEXIBLE SPOUT**

Plastic	
Capacity	250 ml

0171-**MEASURING JUG**

With flexible spout, screw cover and anti-dripping end cap.



Plastic

Art.	Capacity
0171/2	2 l
0171/3	3 l
0171/5	5 l

0172/150**PLASTIC FUNNEL**

Closing screw, flexible spout, anti-dripping top/end covers and upper handle for the hanging.



Plastic

Diameter	Ø 150 mm
Height	435 mm

0158/500**OILER WITH FLEXIBLE SPOUT**

Plastic	
---------	--

Capacity	500 ml
----------	--------

0473-**OIL DRAIN PAN**

With pouring spout and handles, made of high density polyethylene, impact resistant.



Art.	Capacity	Dimensions
0473/10	10 l	Ø 400 x 120h mm
0473/15	15 l	Ø 500 x 130h mm

0183/750**PLASTIC CAN WITH SPOUT**

Plastic	
---------	--

Capacity	750 ml
----------	--------



**0677/500****500 CC HAND OPERATED LEVER GREASE GUN**

Composed of metal tank and pump, coupler and 300 mm PVC flexible hose, for using with loose grease or Ø 53 mm grease cartridges.



Box

Capacity	500 cc
Flexible hose sizes	Ø 8 x 300 mm

0677/IA**AIR OPERATED GREASE GUN**

To be used with Ø 55mm cartridge or loose grease with 2 grease cartridges, 400mm reinforced hose included and 4 jaw adjustable fitting.



Box

Capacity	800 cc
Dimensions	Ø 60 x 500 mm
Working pressure	4 - 6 bar
Max. pressure	10 bar

0677/CG**GREASE CARTRIDGE**

Based on lithium soap, dropping point > 185 °C, resistant to high loads



Box

Capacity	650 cc
Dimensions	Ø 55 mm
Working temperature	-20°C +130°C
Net weight	600 g

0677**1000 CC HAND OPERATED LEVER GREASE GUN**

Composed of metal tank and pump, coupler and 450mm PVC flexible hose for using Ø 55mm grease cartridges or loose grease (adaptor already mounted).



Box

Capacity	1000 cc
Flexible hose sizes	Ø 9 x 450 mm

0677/500CG**GREASE CARTRIDGE**

Based on lithium soap, dropping point > 185 °C, resistant to high loads.



Box

Capacity	500 cc
Dimensions	Ø 53mm
Working temperature	-20°C +130°C
Net weight	400 g

0677/S0**PLASTIC SUCTION DISCHARGE GUN**

Plastic

Capacity	500 g
Dimensions	Ø 50 x 500 mm

**G030-****EMULSIFIABLE COOLANT AND LUBRICANT FLUID**

Of high quality, mixable with water in these percentages: grinding: 2,5-3,5%, turning and milling: 3-4%, deep drilling: 4-7%, threading, tapping and light stamping: 7-15%.



Art.	Quantity
G030/01	1 l
G030/05	5 l
G030/25	25 l

S401/01**COLD GALVANIZER**

Cold galvanizer with high molecular weight, it chemically solidifies producing a long lasting metal coating. It protects all metal surfaces from oxidation. It forms an even resistant layer which can be painted or left as a final protection. It is ideal for retouching, for finishing and repairing galvanized parts.

**Capacity**

400 ml

S401/03**SOLVENT AND RELEASING**

Penetrating synthetic fluid with a high solvent and releasing power, it facilitates the releasing process of bolts, joints, threads, hinges and all other mechanical parts from rust and oxidation. It also leaves a long lasting waterproof and water repellent protective film.

**Capacity**

400 ml

S401/00**MULTI-FUNCTION SPRAY**

A multipurpose product: it lubricates, protects, and releases. It is water-repellent and corrosion preventive. It protects parts subject to exposed water-pins, levers, and outboard motor parts. It meets the nautical market requirements and thanks to its high waterproofing / water-repellent capacities it's ideal for maintenance on any machine part.

**Capacity**

400 ml

S401/02**MULTIPURPOSE GREASE**

A compound of high quality saponified greases. Grease with a wide range of use, good chemical stability, water-repellent and adhesiveness properties. It protects against water and it is perfectly stable and resistant to salty and dirty atmospheres, acid and basic solution and atmospheric corrosion. Ideal for lubricating bearing, bushings, hubs, kingpins, guides and general use on motor vehicles, farming and industrial machinery.

**Capacity**

400 ml

S401/04**PURE SILICONE OIL**

Solution based on pure silicone oil that has anti-stick release agents and lubricants on various materials. It also gives a good water repellency on treated materials preventing the accumulation of electrostatic charges. It works as polishing and protective on plastic parts and it protects the seals from cracking increasing tightness and durability.

**Capacity**

400 ml

**S401/05****WELDING ANTIADHESIVE**

A product made of filmforming synthetic polymers which, owing to their special features, it prevents the seizure of welding spatter to any surface. The film also prevents oxidation and corrosion caused by chemicals. It is suitable for autogenous, electric and inert-gas welding. The compound is free of silicon substances.



Capacity

400 ml

S401/06**SPRAY STAINLESS STEEL**

This zinc coating is silicone resin based and it forms a protective layer. Formulated to remain unchanged over time with exceptional resistance to chemical corrosion and weathering and good mechanical strength. Quick drying coating.



Capacity

400 ml

S401/08**DRY PTFE LUBRICATING AGENT**

Dry, water-repellent, anti-adhesive lubricant. Does not withhold dust and does not stain. It forms a dry and flexible layer of PTFE on the part treated that adheres tightly to metal, wood, and plastic, etc. Temperature-resistant between -80°C and +260°C. It provides protection against corrosion. Ideal for drive chains, threads, rollers, belts, guides and heavy-duty tools, etc.



Capacity

400 ml

S401/09**COPPER GREASE**

This product is made of super fine foliated copper particles and special corrosion inhibitors. It has protective and lubricating properties at high temperatures. Resistance to high temperatures (1000 °C), high adhesive capacity and anti-corrosion capacity make it ideal for all cases where heat or a highly corrosive environment can create irreversible blocks: slip, ring, pins, motor, exhausts, electrical, contacts, threaded connections, injection valves, etc.



Capacity

400 ml

S401/10**CUTTING OIL**

New product developed for specific professional applications in hard metal cutting and operations. Oil with a paraffin mineral base enriched with special EP anti-weld additives. Ideal for use in difficult threading operations with particularly hard, alloy steel. Suitable for use in the hydraulic sector.



Capacity

400 ml

S401/11**AIR CLEAN**

It removes dust even from lesser accessible parts. It is a must for cleaning lenses, objectives, computers and any kind of mechanism.



Capacity

400 ml

**S401/12****DE-OXIDIZING AGENT FOR ELECTRIC CONTACTS**

Specifically formulated for the deep cleaning of electrical, electronic and electromagnetic contacts. It immediately removes humidity and oily substances like grease, oil, sludge, wax and glue from the surface, leaving it clean and degreased. The product might be corrosive to certain delicate surfaces.



Capacity

400 ml

S401/07**BRAKE CLEANER, CARBURETORS AND THROTTLE BODIES**

Special cleaner particularly effective on all mechanical components that require to be degreased without rinsing such as brakes and clutches. It rapidly dissolves oil, grease and other dirty substances. Developed for cleaning throttle bodies and intake manifolds that are made out of plastic material. It removes carbon and oily deposits from the throttle body and the entire intake system. It reduces the emission of harmful exhaust gases.



Capacity

500 ml

S401/15**ZINC ADHESIVE LUBRICANT FOR CHAINS**

High performance chain grease, this high quality product developed and tested for the racing industry (on-and off-road motorcycles) provides guaranteed lubrication for extended periods of intense use. It reduces wearing of chains, crowns, pinions and all mechanical moving parts, while also protecting against water and dust.



Capacity

400 ml

S401/13**VASELINE OIL**

Pure vaseline oil particularly indicated for applications where periodically maintenance, cleaning and lubrication are necessary. It is recommended for the lubrication of delicate mechanism. Due to its special formulation it protects and lasts for long time.



Capacity

400 ml

S401/14**PURE ZINC**

It is a cold galvanizer with high molecular weight. It chemically solidifies producing a long-lasting metal coating. It protects all metal surfaces from oxidation. It forms a resistant layer which can be painted or left as a final protection. It offers exceptional resistance to weathering in difficult conditions. It is ideal for retouching, finishing, and repairing galvanized parts.



Capacity

400 ml

S401/16**LITHIUM GREASE**

Contains lithium and titanium oxides that make it specific and suitable for the nautical sector. It has long-term lubrication and performs in the presence of saline and aggressive atmospheres. It has long-term stability and resistance to oxidation. It protects surfaces from corrosive agents and it is suitable for both high temperatures (220°C/428°F) and low temperatures (-40°C/-40°F). Excellent for lubricating pins, joints, transmissions, levers, suspensions, hinges and exposed machine parts.



Capacity

400 ml

**0660-****PLASTIC FUEL TANK**

With flexible filler, "UN" certified according to european directives.



Plastic

Art.	Capacity	Dimensions	Net weight
0660/05	5 l	260 x 120 x 250h mm	0,5 kg
0660/10	10 l	330 x 160 x 300h mm	0,7 kg
0660/20	20 l	400 x 200 x 360h mm	1 kg

0189-**METAL FUEL TANK**

With flexible filler, "UN" certified according to european directives.



Art.	Capacity	Net weight
0189/05C	5 l	1,5 kg
0189/10C	10 l	2,5 kg
0189/20C	20 l	3,7 kg

0189/G**METAL POURING SPOUT**

10 Pcs

0194**METAL POURING SPOUT****0356****TROLLEY PRESSURE SPRAYER WITH BRASS LANCE PIPE**

With FPM gaskets.



Box

Capacity

16 l

0303**PRESSURE SPRAYER WITH BRASS LANCE PIPE**

With gauge and FPM gaskets.



Box

Capacity

8 l

**0274****PRESSURE SPRAYER WITH BRASS NOZZLE**

With FPM (Viton) gaskets.



Capacity

2 l

0289**PRESSURE SPRAYER WITH BRASS NOZZLE**

Rubber gaskets.



Capacity

2 l

P024/06**LEVER ACTION HAND PUMP**

For transferring lubricating oil, diesel, kerosene and antifreeze drums with rigid steel pipe ø 16 x 700mm with thread M16 x 1 and delivery pipe in plastic.



Box

Aluminum

Capacity

6 l/min

Single stroke capacity

0,10 l

Pump thread

2" / 1-1/2"

0386**LEVER ACTION HAND OIL PUMP**

For transferring lubricating oil, diesel, kerosene and antifreeze drums with telescopic pipe.



Box

0385**ROTARY HAND PUMP**

For transferring lubricating oil, diesel, kerosene and antifreeze drums with telescopic suction pipe.



Box

Aluminum

Capacity

20 l/min

Pump thread

2"



**0474/PP****PVC DIESEL GUN**

Box

Capacity	60÷80 l/min
Nozzle	Ø 25 mm
Inlet thread	1" BSP

0474/PA**AUTOMATIC DIESEL GUN**

With swivel connector.



Box

Capacity	90 l/min
Nozzle	Ø 25 mm
Inlet thread	1" BSP

0272**DRILL PUMP**

For no flammable, explosive, corrosive and oily liquid. Suitable use for rack spindles.



Plastic

Blister

Hydraulic head	30 m
Pump capacity	40 l/min
Max. pressure	0,3 MPa
Max speed	3400 rpm
Max temperature	40°C
Hose diameter	19 mm 3/4"

0474/PE**NOZZLE OIL GUN**

With swivel connector.



Alu

Box

Capacity	60÷120 l/min
Nozzle	Ø 25 mm
Inlet thread	1" BSP

**0755****12VDC DIESEL PUMP**

For mineral oil and diesel.



Box

Motor	DC 12 V, 175 W
Motor speed	4500 rpm
Pump capacity	40 l/min
Hydraulic head	2 m
Suction	4 m
Inlet thread	25 mm
Size	200 x 120 x 155 mm
Usage time	Max 30 min

**R60XA****TRIPOD ELECTRIC RADIANT INFRARED HEATER**

Metal housing, with net-cover.



Box	Art.	Power	Tripod height without heaters	Cable	Cable length
	R609A	230 V - 1,3 kW	600 ÷ 1500 mm	3 x 1,5 mm ² H07RN-F	3 m
	R610A	230 V - 2 kW	600 ÷ 1500 mm	3 x 1,5 mm ² H07RN-F	3 m

T609**ADJUSTABLE HEIGHT TRIPOD**

Suitable for light, heater.



Height	600 ÷ 1500 mm
Upper fixing	M 8

R609**INFRARED HEATER**

With support for wall mounting metal housing, with net-cover.



Power	230 V - 1,3 kW
Cable	3 x 1,5 mm ² H07RN-F
Cable length	3 m

R610**INFRARED HEATER**

With support for wall mounting metal housing, with net-cover.



Power	230 V - 2 kW
Cable	3 x 1,5 mm ² H07RN-F
Cable length	3 m

R60XB**ELECTRIC RADIANT INFRARED HEATER WITH STAND**

Metal housing, with metal net-cover.



Art.	Power	Cable	Cable length
R609B	230 V - 1,3 kW	3 x 1,5 mm ² H07RN-F	1,1 m
R610B	230 V - 2 kW	3 x 1,5 mm ² H07RN-F	1,1 m

B609**INFRARED BULB**

Box	Power	230 V - 1,3 kW
	Length	250 mm

B610**INFRARED BULB**

Box	Power	230 V - 2 kW
	Length	340 mm

**0218-****LED FLOODLIGHTS**

Aluminium super slim die-cast housing, tempered glass.



Alu



Box



Art.	Power	Luminous flux	Colour temperature	LED number	Cable	Dimensions
0218/10	230 V 50 Hz 10 W	800 lm	4000 K	15 SMD LED	30 cm, H05RN-F 3 x 1 mm ²	150 x 95 mm
0218/20	230 V 50 Hz 20 W	1600 lm	4000 K	28 SMD LED	30 cm, H05RN-F 3 x 1 mm ² mm	145 x 120 mm
0218/30	230 V 50 Hz 30 W	2400 lm	4000 K	42 SMD LED	30 cm, H05RN-F 3 x 1 mm ² mm	180 x 150 mm
0218/50	230 V 50 Hz 50 W	4000 lm	4000 K	56 SMD LED	30 cm, H05RN-F 3 x 1 mm ²	210 x 180 mm

0218-XB**LED FLOODLIGHT WITH STAND**

Aluminium super slim die-cast housing, tempered glass.



Alu



Box



Art.	Power	Luminous flux	Colour temperature	Cable
0218/10B	230 V 50 Hz 10 W	800 lm	4000 K	2 m, 3 x 1 mm ² H05VV-F
0218/20B	230 V 50 Hz 20 W	1600 lm	4000 K	2 m, 3 x 1 mm ² H05VV-F
0218/30B	230 V 50 Hz 30 W	2400 lm	4000 K	2 m, 3 x 1 mm ² H05VV-F
0218/50B	230 V 50 Hz 50 W	4000 lm	4000 K	2 m, 3 x 1 mm ² H05VV-F

0218-XS**LED FLOODLIGHT WITH MOTION AND BRIGHTNESS SENSOR**

Aluminium super slim die-cast housing, tempered glass.



Alu



Box



Art.	Power	Luminous flux	Colour temperature	Cable
0218/10S	230 V 50 Hz 10 W	800 lm	4000 K	30 cm, 3 x 1 mm ² H05VV-F
0218/20S	230 V 50 Hz 20 W	1600 lm	4000 K	30 cm, 3 x 1 mm ² H05VV-F
0218/30S	230 V 50 Hz 30 W	2400 lm	4000 K	30 cm, 3 x 1 mm ² H05VV-F
0218/50S	230 V 50 Hz 50 W	4000 lm	4000 K	30 cm, 3 x 1 mm ² H05VV-F

**0343****FLEXIBLE ARM LAMP**

Box

Power	230 V 50 Hz
Bulb	Max 40 W, E27 not included
Range of action	800 mm
Clamp capacity	35 mm

**0366****56 LED MAGNIFIER LAMP**

With lens.



Box

Power	230 V 50 Hz 9 W
Magnification	2x
Luminous flux	600 lm
Colour temperature	6500 K
Lens	Ø 120 mm
Range of action	810 mm
Clamp capacity	70 mm

**0530****LED LAMP**

With lens.



Box

Power	230 V 50 Hz 22 W
Magnification	3x
Lens	Ø 120 mm
Range of action	810 mm
Clamp capacity	70 mm
Luminous flux	1000 lm

**0530A****LED LAMP**

With lens.



Box

Power	250 V 50 Hz 11 W
Magnification	3x
Lens	Ø 127 mm
Clamp capacity	75 mm
Luminous flux	1000 lm
Colour temperature	6000 K

**0891A****LED LAMP**

With two lenses, dimmable touch buttons, 6 UV Led lights and a super bright and adjustable light point. Lifetime up to 25,000 hours.



Power	250 V 50 Hz 11 W
Magnification	2x + 6x
Lens	Ø 138 mm
Clamp capacity	75 mm
Luminous flux	1000 lm
Colour temperature	6000 K

0516**LOW CONSUMPTION LAMP**

With lens.



Box

Power	230 V 50 Hz 2 x 9 W
Magnification	2x
Lens	190 x 157 mm
Range of action	810 mm
Clamp capacity	70 mm
Luminous flux	1000 lm

**0344****FLEXIBLE ARM LAMP**

With lens. Bulb not included.



Box

Power	230 V 50/60 Hz
Bulb	Max 60 W, E27 not included
Magnification	2x
Lens	Ø 100 mm
Range of action	800 mm
Clamp capacity	35 mm

**0661****TABLE LAMP**

With lens.



Box

Power	230 V 50 Hz 11 W
Magnification	2x
Lens	Ø 89 mm





0625

HEAD LIGHT WITH MAGNIFYING LEN SET



Box

Multiplier	Target distance (mm)
1,2x	520 ÷ 620
1,8x	230 ÷ 320
2,5x	150 ÷ 250
3,5x	80 ÷ 120
Bulb	2,2 V - 0,25 A
Battery	2 x 1,5V AAA

L006

LED MAGNIFIER



Box

Lens	50 x 50 mm
Magnification	3x
LED	5 - 9000 mcd
LED	1
Battery	4 Ag10
Pack	10

0482/3

HEAD LAMP WITH SENSOR

Switch on and off function by passing the hand in front of the lamp.



LED	3 W COB
Luminous flux	Max 300 lm
Colour temperature	6500 K
Battery	3.7 V 1500 mAh Li-ion
Autonomy	4 h
Recharging time	3 h

0493/2

LED HEADLIGHT

120 lm, with elastic belt, 2 functions: focus and flash, for using with 3 batteries AAA type.



Not included batteries	3 x AAA
Intensity	120 lm
Sizes	Ø 75 x 45 x 45 mm
Autonomy	5 h

0659

CRYSTAL LENS SET



12 Pcs Expositor



FERVI

Contents

3 Pcs ø 50

3 Pcs ø 60

Magnifications

3x - 10x mm

3x - 8x mm

3 Pcs ø 75

3 Pcs ø 90

3x - 8x mm

3x - 8x mm

0437

HIGH POWERFUL LED TORCH

Long range, distance capacity more than 150 m, long life.



Box

Not included batteries

4 C

LED power

3 W

Autonomy

25 h / 100 %

0493/1

LED HEADLIGHT

80 lm, made of ABS and rubber cover, with elastic belt, 2 functions: focus and flash, for using with 3 batteries AAA type.



Box

Not included batteries	3 x AAA
Intensity	80 lm
Sizes	Ø 50 x 42 x 58 mm
Autonomy	10 h

0209

10 + 1 LED MAGNETIC WORK LIGHT

With rotating head, Led on the top and front with 2 brightness levels.



Blister Alu



Luminous flux	50 - 300 lm
Colour temperature	6500 K
Not included batteries	3 AAA
Tilting head	180°
Revolution	180°
Dimensions	35 x 330 mm



**0128A****COB +1 LED POCKET TORCH LIGHT WITH MAGNET**

Swivel clip, long lasting, small size and high brightness make it essential in professional and do-it-yourself lines.



ABS

Expositor

Sizes	174 x 43 x 22 mm
Luminous flux	140 lm
Not included batteries	3 x AAA

0787**ALUMINUM TORCH**

Alu

Blister

Not included batteries	2 C
LED number	8 LED 11000 mcd
Sizes	Ø 48,5 x 31 x 215 mm

0107**30 + 7 LED MAGNETIC LIGHT**

With magnet and hook on the back side.



ABS

Expositor

Single LED life	100000 hours
Intensity	50 lm
Not included batteries	3 AA
Dimensions	40 x 35 x 203 mm

0291**24 + 3 LED MAGNETIC LIGHT**

With magnet and hook on the back side.



ABS

Expositor

Single LED life	100000 hours
Not included batteries	3 AAA

0671/1P**WHITE LED FLASHLIGHT WITH EXTRA BRIGHTNESS**

Alu



Blister Aluminum

Not included batteries	2 AAA
LED number	1 - 9000 mcd
Sizes	Ø 12,5 x 141 mm

0492**LED FLASHLIGHT WITH TELESCOPIC MAGNET**

Alu

Expositor Aluminum

Button batteries	4 x LR44
LED number	6
Intensity	6 x 10 lm
Sizes	Ø 30 x 21 x 180 mm
Max length	710 mm
Autonomy	3 h

0311**24 LED MAGNETIC LIGHT**

With magnet and hook on the back side.



ABS

Expositor

Single LED life	100000 hours
Not included batteries	3 AA

0338**ALUMINUM HAND TORCH WITH 1 LED AND MANUAL ZOOM**

3 light types: strong, media and flashing; adapter to work with 3 batteries AAA type in a box.



Battery	1 li-ion 3.7V / 1800 mAh
LED	Q3 3 W
Sizes	Ø 34,5 x 28 x 135 mm
Battery charger	110 / 230 V 50 / 60 Hz
Autonomy	4 h





0597

RECHARGEABLE LED LIGHT WITH MAGNET

With battery charger 12 Vdc and 230 Vac, foldable, hanging and magnetic.



ABS



Box

Battery	3.7 V 1800 mAh
LED	8 SMD + 5 LED
Recharging time	8 ÷ 10 h
Autonomy	7 ÷ 8 h
Luminous flux	300 + 100 lm



0889

RECHARGEABLE LED LIGHT WITH MAGNET

With battery charger 12 Vdc and 230 Vac, foldable, hanging and magnetic.



ABS

Box

Battery	3,7 V - 1100 mAh - Lithium
LED	21 + 5 - 9000 mcd
Recharging time	4 ÷ 5 h
Autonomy	4 ÷ 6 h
Luminous flux	400 + 150 lm



0693A

RECHARGEABLE LED LAMP

With charging station, foldable, hanging and magnetic.



ABS

Box

Battery	3,7V - 2600mAh - Li-ion
LED	6W COB LED - 1W SMD 6500K
Luminous flux	600 lm
Recharging time	4 h
Autonomy	4,5 h Eco mode
Working temperature	-10°C÷40°C

0123

MULTIFUNCTION USB RECHARGEABLE LED LIGHT

Equipped with a front LED flashlight with various brightness levels, and white and red LEDs on the sides with flashing function. USB charging cable and power adapter. Charging and charging status LEDs. Can be charged directly from your computer. IPX4 rated.



ABS

Box

Battery	3.7V - 1800 mAh - Li-ion
LED	24 Cree XPG R5
Intensity	30 - 300 lm
Dimensions	191 x 99 x 148 mm
Battery charger	USB 110 - 230 V 50 - 60 Hz
Autonomy	2,5 h

L008

SLIM INSPECTION CORDLESS LED LIGHT

Rechargeable, high capacity lithium battery for long time operation, strong light output 400 lumen, the slim design and robust structure make it indestructible even if it falls from a height of one meter or, if it is forgotten on a flat floor, the car passes over it.



ABS

Box

Power	100 ÷ 240 V , 50 ÷ 60 Hz
Battery	3,7V 2400 mAh Lithium
Luminous flux	400 lm
Recharging time	3,5 h
Autonomy	3 - 10 h
Intensity	400 lm





0342

PORTABLE NEON LAMP WITH HOOK



Blister

Power

Dimensions

Cable

230 V 50 Hz 8 W

Ø 31 x 435 mm

5 m

0900

MULTI PORTABLE MAGNETIC LED LIGHT

COB Led portable lamp made in impact-resistant ABS. The ledlamp is adjustable in four different light intensities from 350 to 1400 Lumen. The strong magnet at the base and the rotatable body through 180°, makes it perfect to be used in any circumstance.



Box

Aluminum



COB

USB Type C | 5 V 2 A

3.7 V 5200 mAh Li-ion

350 ÷ 1400 lm

4 h

3 h ÷ 14 h

116 x 101 x 41,5 mm

0900/BL

MAGNETIC LED LAMP WITH EXTENDABLE UNDERCABINET STAND

The under-hood lamp consists of two magnetic, 360-degree rotatable Cob Led light points for a maximum of 2800 lumens (1400 lm + 1400 lm) and an extendable bar up to 2100 mm to fit any type of hood.



Box

ABS

Alu

Aluminum

Nylon

LED

COB

Power

USB Type C | 5 V 2 A

Battery

3.7 V 5200 mAh Li-ion

Luminous flux

2 x 400-1400 lm

Recharging time

4 h

Autonomy

4 h

Adjustable extension clamps

850 ÷ 2100mm



0429

WORKING LAMP HOLDER WITH 5M POWER CORD

Without on/off switch, max 60 W for incandescent lamps, E27 screw cup bulb, voltage range 12 ÷ 230 V; bulb not included.



Cable length

5 m

Screw cup bulb

E27

Voltage

230 V

0428

AUTOMATIC CABLE REEL WITH LAMP HOLDER

Overload protection, max 60w for incandescent lamps, Led light on the cable reel to show the presence of power, bulb not included.



Box

Cable size

13 + 1 m - H05RR-F - 2 x 1 mm²

Screw cup bulb

E27

Voltage

12 ÷ 230 V



**E481/20P**

NEW

AUTO REWIND CABLE REEL WITH SOCKET

Supplied with Schuko socket and overload protection system.



PP

Box Polyprop.

**Cable length**

20 + 2 m

Cable typeH05VV-F 3G1.5mm²**Power**

12 V ÷ 250 V (50 Hz)

Max power for rolled cable

1 kW

Max power for unrolled cable

2,5 kW

Power outlet

Schuko

Net weight

6 kg

E481/20

NEW

AUTO REWIND CABLE REEL WITHOUT SOCKET

With overload protection system.



PP

Box Polyprop.

**Cable length**

20 + 2 m

Cable typeH05VV-F 3G1.5mm²**Power**

12 V ÷ 250 V (50 Hz)

Max power for rolled cable

1 kW

Max power for unrolled cable

2,5 kW

Net weight

6 kg

A010-X**CABLE REEL**

Double isolation cable H05VV-F homologated, homologated PVC pressure-cast plug, thermal circuit breaker with manual reset, max. Power with rolled cable 1,2 kW, max. Power with unrolled cable 3,4 kW.



Box

**Art.****Cable length****Section****Drum**

A010/10

10 m

3 x 1,5 mm²

Ø 200 mm

A010/20

20 m

3 x 1,5 mm²

Ø 250 mm

A010/30**CABLE REEL**

Conform to standard EN 61316, flexible cord H07RN-F neoprene homologated, IP 44 plugs, thermal circuit breaker with manual reset, max. power with rolled cord 5 kW, max. power with unrolled cord 11 kW.



Box

**Power**

230 V

Cable length

30 m

Section3 x 2,5 mm²**Drum**

Ø 340 mm

A010-**CABLE REEL**

Complies with standard EN 61242, double isolation cable H05VV-F homologated, homologated PVC pressure-cast plug, thermal circuit breaker with manual reset, max. Power with rolled cable 1,1 kW, max. Power with unrolled cable 3,2 kW.



Box

**Art.****Cable length****Section****Drum**

A010/15

15 m

3 x 1,5 mm²

Ø 190 mm

A010/25

25 m

3 x 1,5 mm²

Ø 240 mm

A010/50

50 m

3 x 1,5 mm²

Ø 310 mm

A010/30T**CABLE REEL**

Complies with standard EN 61316, flexible cord H07RN-F, neoprene homologated, IP 44 plugs, thermal circuit breaker, with manual reset, max. Power with rolled cord 5 kW, max. Power with unrolled cord 11 kW.



Box

**Power**

400 V

Cable length

30 m

Section4 x 2,5 mm²**Drum**

Ø 340 mm

