





CALIPERS, HEIGHT GAUGE AND RULERS

- pag.262  — Digital calipers
- pag.262  — Calipers with dial gauge
- pag.263  — Vernier calipers
- pag.265  — Height gauge
- pag.265  — Steel and digital rules



DIAL INDICATORS

- pag.268  — Dial indicators
- pag.270  — Dial thickness gauges
- pag.271  — Edge finders



MICROMETERS

- pag.272  — Outside micrometers
- pag.273  — Inside micrometers



GAUGE BLOCKS, SCREW GAUGE AND HOLE PLAIN GAUGE

- pag.274  — Gauge blocks
- pag.275  — Gauges



MEASURING TOOLS

- pag.277  — Magnetic base
- pag.281  — Inspection plates
- pag.282  — Squares
- pag.284  — Screw pitch gauge



PRECISION TAPES, LEVELS AND GONIOMETERS

- pag.287  — Precision tapes
- pag.288  — Levels
- pag.290  — Protractor



ANALOGIC AND DIGITAL METERS

- pag.291  — Endoscopes
- pag.292  — Testers
- pag.294  — Digital meters
- pag.298  — Refractometers
- pag.299  — Hardness testers



SCALES

- pag.301  — Scales
- pag.302  — Dinamometers

C031/150
€ 168,00
STAINLESS STEEL ELECTRONIC DIGITAL CALIPER

WITH 2 FUNCTIONS AND A BIG SCREEN



DIN 862 67

Range	0 ÷ 150 mm - 0 ÷ 6 inch
Reading	0,01 mm - 0.0005 inch
Jaws	40 mm
Beam	16 x 3 mm

C041/150
€ 32,59
MONOBLOCK STAINLESS STEEL ELECTRONIC DIGITAL CALIPER

3 FUNCTIONS WITH BIG LCD



Range	0 ÷ 150 mm - 0 ÷ 6 inch
Reading	0,01 mm - 0.0005 inch
Jaws	40 mm
Beam	16 x 3 mm

C047/500
€ 376,32
STAINLESS STEEL ELECTRONIC DIGITAL CALIPER

WITH 4 FUNCTIONS AND BIG DISPLAY, FINE ADJUSTMENT AND LONG JAWS




DIN 862

Range	0 ÷ 500 mm - 0 ÷ 20 inch
Reading	0,01 mm - 0.0005 inch
Jaws	150 mm
Beam	24 x 5,5 mm

C033-
STAINLESS STEEL ELECTRONIC DIGITAL CALIPER

WITH 3 FUNCTIONS AND A BIG SCREEN

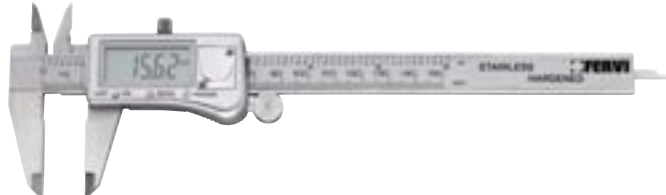

DIN 862 STAINLESS STEEL

Art.	€	Range	Reading	Beam	Jaws
C033/150	€ 58,13	0 ÷ 150 mm - 0 ÷ 6 inch	0,01 mm - 0.0005 inch	16 x 3,2 mm	40 mm
C033/200	€ 84,56	0 ÷ 200 mm - 0 ÷ 8 inch	0,01 mm - 0.0005 inch	16 x 3,2 mm	50 mm
C033/300	€ 125,44	0 ÷ 300 mm - 0 ÷ 12 inch	0,01 mm - 0.0005 inch	16 x 3,2 mm	60 mm

C043-
STAINLESS STEEL ELECTRONIC DIGITAL CALIPER

WITH 4 FUNCTIONS AND BIG LCD, FINE ADJUSTMENT



DIN 862

Art.	€	Range	Reading	Jaws	Beam
C043/500	€ 309,12	0 ÷ 500 mm - 0 ÷ 20 inch	0,01 mm - 0.0005 inch	100 mm	25 x 6 mm
C043/1000	€ 619,36	0 ÷ 1000 mm - 0 ÷ 40 inch	0,01 mm - 0.0005 inch	150 mm	30 x 8 mm

C005/150
€ 51,18
STAINLESS STEEL DIAL CALIPER


DIN 862

Range	0 ÷ 150 mm
Reading	0,01 mm
Jaws	40 mm
Beam	15,5 x 3 mm

C006-**STAINLESS STEEL DIAL CALIPER**
 DIN 862

Art.	€	Range	Reading	Jaws	Beam
C006/150	€ 45,81	0 ÷ 150 mm	0,02 mm	40 mm	16 x 3 mm
C006/200	€ 69,78	0 ÷ 200 mm	0,02 mm	50 mm	16 x 3 mm
C006/300	€ 113,12	0 ÷ 300 mm	0,02 mm	60 mm	20 x 4 mm

C057/150**€ 19,82****CHROMED VERNIER CALIPER**
 DIN 862

Range	0 ÷ 150 mm - 0 ÷ 6 inch
Reading	1/20 0,05 mm - 1/128 inch
Jaws	40 mm
Beam	16 x 3 mm

C019/150**€ 15,68****CHROMED VERNIER CALIPER**
 DIN 862

Range	0 ÷ 150 mm - 0 ÷ 6 inch
Reading	1/20 0,05 mm - 1/128 inch
Jaws	40 mm
Beam	14,5 x 3 mm

C018-**MONOBLOCK STAINLESS STEEL CHROMED VERNIER CALIPER**
 DIN 862

Art.	€	Range	Reading	Jaws	Beam
C018/150	€ 34,50	0 ÷ 150 mm - 0 ÷ 6 inch	1/20 0,05 mm - 1/128 inch	40 mm	16 x 3 mm
C018/200	€ 53,65	0 ÷ 200 mm - 0 ÷ 8 inch	1/50 0,02 mm - 1/1000 inch	50 mm	16 x 3 mm

C011-**MONOBLOCK STAINLESS STEEL CHROMED VERNIER CALIPER**
 DIN 862

Art.	€	Range	Reading	Jaws	Beam
C011/150	€ 37,63	0 ÷ 150 mm - 0 ÷ 6 inch	1/50 0,02 mm - 1/1000 inch	40 mm	16 x 3 mm
C011/200	€ 62,27	0 ÷ 200 mm - 0 ÷ 8 inch	1/50 0,02 mm - 1/1000 inch	50 mm	16 x 3 mm

C056/200**€ 27,55****CHROMED VERNIER CALIPER**
 DIN 862

Range	0 ÷ 200 mm - 0 ÷ 8 inch
Reading	1/50 0,02 mm - 1/1000 inch
Jaws	50 mm
Beam	16,5 x 3,5 mm



C049/300
€ 58,13
CHROMED VERNIER CALIPER

FINE ADJUSTMENT



DIN 862

Range	0 ÷ 300 mm
Reading	1/50 - 0,02 mm
Jaws	60 mm
Beam	18,5 x 4 mm

C020-
CHROMED VERNIER CALIPER

FINE ADJUSTMENT



DIN 862

Art.	€	Range	Reading	Jaws	Beam
C020/500	€ 141,12	0 ÷ 500 mm	1/50 0,02 mm	100 mm	23 x 6 mm
C020/1000	€ 347,20	0 ÷ 1000 mm	1/50 0,02 mm	150 mm	30 x 10 mm
C020/1500	€ 975,52	0 ÷ 1500 mm	1/50 0,02 mm	225 mm	49 x 14 mm
C020/2000	€ 1568,00	0 ÷ 2000 mm	1/50 0,02 mm	250 mm	50 x 15 mm

C007-
CHROMED VERNIER DEPTH GAUGE


DIN 862

Art.	€	Range	Reading	Base	Beam
C007/200	€ 35,50	0 ÷ 200 mm	1/50 0,02 mm	100 mm	9,6 x 4,5 mm
C007/300	€ 48,72	0 ÷ 300 mm	1/50 0,02 mm	100 mm	9,6 x 4 mm

C021-
MONOBLOCK STAINLESS STEEL CHROMED VERNIER CALIPER

FINE ADJUSTMENT



DIN 862

Art.	€	Range	Reading	Jaws	Beam
C021/300	€ 162,40	0 ÷ 300 mm - 0 ÷ 12 inch	1/50 0,02 mm - 1/128 inch	100 mm	23 x 6 mm
C021/500	€ 224,00	0 ÷ 500 mm - 0 ÷ 20 inch	1/50 0,02 mm - 1/128 inch	150 mm	23 x 6 mm
C021/1000	€ 499,52	0 ÷ 1000 mm - 0 ÷ 40 inch	1/50 0,02 mm - 1/128 inch	150 mm	32 x 10 mm

C044-
STAINLESS STEEL ELECTRONIC DIGITAL DEPTH GAUGE

WITH 3 FUNCTIONS WITH BIG DISPLAY



DIN 862

Art.	€	Range	Reading	Base	Beam
C044/200	€ 81,98	0 ÷ 200 mm - 0 ÷ 8 inch	0,01 mm - 0.0005 inch	100 mm	13 x 3,5 mm
C044/300	€ 141,12	0 ÷ 300 mm - 0 ÷ 12 inch	0,01 mm - 0.0005 inch	150 mm	15 x 4 mm

C010/200
€ 51,30
SCRATCH VERNIER CALIPER

C010/200P
€ 7,50
2-BIT SET FOR CALIPER

Range	0 ÷ 200 mm - 0 ÷ 8 inch
Reading	1/10 0,1 mm - 1/128 inch
Jaws	10 mm
Beam	16 x 3 mm

T092-

ELECTRONIC DIGITAL MULTI FUNCTION HEIGHTGAUGE

WITH 4 FUNCTIONS AND BIG DISPLAY, WITH SCRIBER



DIN 862

Art.	€	Range	Reading	Accuracy	Weight
T092/300	€ 516,32	0÷300 mm - 0÷12"	0,01 mm - 0.005"	0,03 mm - 0.015"	4 kg
T092/600	€ 857,92	0÷600 mm - 0÷24"	0,01 mm - 0.005"	0,15 mm - 0.025"	14 kg

T100-

VERNIER HEIGHTGAUGE CHROME PLATED

WITH SCRIBER




DIN 862

Art.	€	Range	Reading	Weight
T100/300	€ 104,83	0 ÷ 300 mm	0,02 mm	3 kg
T100/500	€ 207,20	0 ÷ 500 mm	0,02 mm	6 kg

REAx-FS

STAINLESS STEEL RULE

CAT 42



Stainless steel DIN 1014/32/EU

Art.	€	Length	Stem	Weight
REA0150/FS	€ 2,95	150 mm	13 x 0.5 mm	0.01 kg
REA0300/FS	€ 3,92	300 mm	13 x 0.5 mm	0.02 kg
REA0500/FS	€ 6,83	500 mm	18 x 0.5 mm	0.03 kg
REA1000/FS	€ 16,46	1000 mm	18 x 0.5 mm	0.07 kg

REAx-FD

STAINLESS STEEL RULE

CAT 42



Stainless steel DIN 1014/32/EU

Art.	€	Length	Stem	Weight
REA0150/FD	€ 2,95	150 mm	13 x 0.5 mm	0.01 kg
REA0300/FD	€ 3,92	300 mm	13 x 0.5 mm	0.02 kg
REA0500/FD	€ 6,83	500 mm	18 x 0.5 mm	0.03 kg
REA1000/FD	€ 16,46	1000 mm	18 x 0.5 mm	0.07 kg

REAx-RS

CAT 42

STAINLESS STEEL RULE



Stainless steel DIN 2014/32/EU

Art.	€	Length	Stem	Weight
REA0300/RS	€ 7,50	300 mm	30 x 1.0 mm	0.07 kg
REA0500/RS	€ 15,68	500 mm	30 x 1.0 mm	0.12 kg
REA1000/RS	€ 30,02	1000 mm	30 x 1.0 mm	0.25 kg
REA2000/RS	€ 55,78	2000 mm	30 x 1.0 mm	0.48 kg

REAx-RD

CAT 42

STAINLESS STEEL RULE



Stainless steel DIN 2014/32/EU

Art.	€	Length	Stem	Weight
REA0300/RD	€ 7,50	300 mm	30 x 1.0 mm	0.07 kg
REA0500/RD	€ 15,68	500 mm	30 x 1.0 mm	0.12 kg
REA1000/RD	€ 30,02	1000 mm	30 x 1.0 mm	0.25 kg
REA2000/RD	€ 55,78	2000 mm	30 x 1.0 mm	0.48 kg

REAx-RS-MID

CAT 42

STAINLESS STEEL RULE MID



Stainless steel DIN 2014/32/UE & MID EC II

Art.	€	Length	Section	Weight
REA0500/RS/MID	€ 18,48	500 mm	30 x 1.0 mm mm ²	0.12 kg
REA1000/RS/MID	€ 35,95	1000 mm	30 x 1.0 mm mm ²	0.25 kg
REA2000/RS/MID	€ 71,90	2000 mm	30 x 1.0 mm mm ²	0.48 kg

REAx-RD-MID

CAT 42

STAINLESS STEEL RULE MID



Stainless steel DIN 2014/32/EU & MID EC II

Art.	€	Length	Stem	Weight
REA0500/RD/MID	€ 18,48	500 mm	30 x 1.0 mm	0.12 kg
REA1000/RD/MID	€ 35,95	1000 mm	30 x 1.0 mm	0.25 kg
REA2000/RD/MID	€ 71,90	2000 mm	30 x 1.0 mm	0.48 kg

RLAx-RS-MID

CAT 42

STAINLESS STEEL RULE MID



Stainless steel DIN 2014/32/EU & MID EC II

Art.	€	Length	Stem	Weight
RLA0500/RS/MID	€ 48,16	500 mm	30 x 1.0 mm	0.12 kg
RLA1000/RS/MID	€ 94,30	1000 mm	30 x 1.0 mm	0.25 kg
RLA2000/RS/MID	€ 189,28	2000 mm	30 x 1.0 mm	0.48 kg

RLAx-RD-MID

CAT 42

STAINLESS STEEL RULE MID



Stainless Steel DIN 2014/32/EU & MID EC II

Art.	€	Length	Stem	Weight
RLA0500/RD/MID	€ 48,16	500 mm	30 x 1.0 mm	0.12 kg
RLA1000/RD/MID	€ 94,30	1000 mm	30 x 1.0 mm	0.25 kg
RLA2000/RD/MID	€ 189,28	2000 mm	30 x 1.0 mm	0.48 kg

REGx-FS

CAT 42

STAINLESS STEEL RULE WITH HOOK 90°



Stainless steel DIN 2014/32/EU

Art.	€	Length	Stem	Weight
REG0200/FS	€ 11,31	200 mm	13 x 0.5 mm	0.01 kg
REG0300/FS	€ 12,88	300 mm	13 x 0.5 mm	0.01 kg
REG0500/FS	€ 25,42	500 mm	18 x 0.5 mm	0.01 kg

Rx

SCALE WITH MULTIFUNCTION DIGITAL READOUT

THE SCALE CAN BE CUT TO REACH THE DESIRED LENGTH FUNCTIONS : ON / OFF - mm / INCH - ZERO - ABS / INC - AUTO POWER OFF



Art.	€	Total length	Range	Reading
R060	€ 78,06	630 mm - 24.8" inch	500 mm - 19.7" inch	0,01 mm - 0.001" inch
R100	€ 101,92	1000 mm - 40" inch	900 mm - 35" inch	0,01 mm - 0.001" inch

C064

€ 101,92

MULTIFUNCTIONAL ELECTRONIC DIGITAL INDICATOR LARGE DISPLAY

FUNCTIONS: ZERO POINT AT ANY POSITION, mm/INCH, CONVERSION, HOLD, MIN, MAX FUNCTIONS, AUTO POWER OFF, BATTERY SR44W



DIN 878

Range	0 ÷ 12,7 mm / 0 ÷ 0.5 inch
Reading	0,01 mm / 0.005 inch
Accuracy	0,02 mm / 0.002 inch
Dial size	60 mm

C060

€ 213,92

MULTIFUNCTIONAL ELECTRONIC DIGITAL INDICATOR LARGE DISPLAY

FUNCTIONS: ZERO POINT AT ANY POSITION, mm/INCH CONVERSION, HOLD, MIN, MAX FUNCTIONS, AUTO POWER OFF, BATTERY CR 2025



DIN 878 ABS

Range	0 ÷ 12,7 mm / 0 ÷ 0.5 inch
Reading	0,001 mm / 0.0005 inch
Accuracy	0,005 mm / 0.0025 inch
Dial size	60 mm

C004

€ 84,00

DIAL INDICATOR


DIN 878

Dial size	60 mm
Range	0 ÷ 1 mm
Reading	0,001 mm
Accuracy	0,002 mm

C017

€ 58,13

SHOCKPROOF AND SPLASHPROOF DIAL INDICATOR

WITH MOVEMENT ON JEWELS, WITH BACK LUG



DIN 878

Dial size	60 mm
Range	10 mm
Reading	0,01 mm
Accuracy	0,015 mm

C002

€ 50,51

DIAL INDICATOR


DIN 878

Dial size	60 mm
Range	10 mm
Reading	0,01 mm
Accuracy	0,015 mm

C023-
DIAL INDICATOR

WITH BACK LUG

C023
C023/N
C023G


DIN 878

Art.	€	Dial size	Range	Reading	Accuracy
C023	€ 29,57	60 mm	10 mm	0,01 mm	0,015 mm
C023G	€ 19,49	60 mm	10 mm	0,01 mm	0,015 mm
C023/N	€ 33,49	60 mm	10 mm	0,01 mm	0,015 mm

C002/42**€ 36,40****DIAL INDICATOR**

DIN 878

Dial size	42 mm
Range	5 mm
Reading	0,01 mm
Accuracy	0,015 mm

C048**€ 71,23****DIAL INDICATOR**

WITH BACK LUG



DIN 878

Dial size	60 mm
Range	30 mm
Reading	0,01 mm
Accuracy	0,015 mm

T003-**DIAL TEST INDICATOR**

DIN 2270

Art.	€	Dial size	Range	Reading	Accuracy	Contact point
T003	€ 89,60	32 mm	0,8 mm	0,01 mm	0,015 mm	Ø 2 mm
T003G	€ 53,20	32 mm	0,8 mm	0,01 mm	0,008 mm	Ø 2 mm

T007-**DIAL TEST INDICATOR**

DIN 2270

Art.	€	Dial size	Range	Reading	Accuracy	Contact point
T007	€ 90,50	40 mm	0,8 mm	0,01 mm	0,011 mm	Ø 2 mm
T007G	€ 57,68	40 mm	0,8 mm	0,01 mm	0,008 mm	Ø 2 mm

T006**€ 96,66****DIAL TEST INDICATOR WITH LONG CONTACT POINT**

DIN 2270

Dial size	40 mm
Range	0,8 mm
Reading	0,01 mm
Accuracy	0,011 mm
Contact point	Ø 2 mm
Contact point length	29 mm

T005**€ 106,40****DIAL TEST INDICATOR**

DIN 2270

Dial size	32 mm
Range	0,2 mm
Reading	0,002 mm
Accuracy	0,005 mm
Contact point	Ø 2 mm

T011
€ 81,98
DIAL TEST INDICATOR


DIN 2270

Dial size	32 mm
Range	0,8 mm
Reading	0,01 mm
Accuracy	0,011 mm
Contact point	Ø 2 mm

A016-
BORE GAUGE SET WITH DIAL INDICATOR


Art.	€	Range	Reading	Depth
A016/6/10	€ 137,76	6 ÷ 10 mm	0,01 mm	40 mm
A016/10/18	€ 142,24	10 ÷ 18 mm	0,01 mm	100 mm
A016/18/35	€ 142,24	18 ÷ 35 mm	0,01 mm	125 mm
A016/35/50	€ 142,24	35 ÷ 50 mm	0,01 mm	150 mm
A016/50/160	€ 142,24	50 ÷ 160 mm	0,01 mm	150 mm
A016/160/250	€ 159,04	160 ÷ 250 mm	0,01 mm	400 mm
A016/250/450	€ 180,32	250 ÷ 450 mm	0,01 mm	400 mm

M062
€ 23,07
DIGITAL DIAL THICKNESS GAUGE


Range	0 ÷ 12 mm - 0 ÷ 0.5 inch
Reading	0,01 mm - 0.0005 inch
Throat depth	20 mm
Accuracy	±0,1 mm - 0.004 inch

M055
€ 61,15
DIAL THICKNESS GAUGE


Range	0 ÷ 10 mm
Reading	0,01 mm
Throat depth	9 ÷ 16 mm

M055/120
€ 93,07
DIAL THICKNESS GAUGE


Range	0 ÷ 10 mm
Reading	0,01 mm
Throat depth	120 mm

C013/10/30
€ 137,76
DIAL INSIDE GAUGE


Range	10 ÷ 30 mm
Depth	50 mm
Anvil	Ø 2,5 x 2 mm
Reading	0,01 mm

C014-**DIAL INSIDE GAUGE**

Art.	€	Range	Depth	Anvil	Reading
C014/15/35	€ 137,76	15 ÷ 35 mm	50 mm	Ø 3 x 3 mm	0,01 mm
C014/35/55	€ 137,76	35 ÷ 55 mm	80 mm	Ø 3 x 6 mm	0,01 mm
C014/55/75	€ 137,76	55 ÷ 75 mm	80 mm	Ø 3 x 6 mm	0,01 mm
C014/75/95	€ 137,76	75 ÷ 95 mm	100 mm	Ø 3 x 8 mm	0,01 mm

A020**€ 129,92****ZERO SETTING WITH DIAL INDICATOR WITH MAGNETIC BASE**

Zero setting height	50 mm
Reading	0,01 mm
Range	0 ÷ 8 mm

**C063****€ 69,78****ELECTRONIC EDGE FINDER**

Shank	Ø 20 mm
Contact point	Ø 10 mm
Total length	100 mm
Weight	100 g
Power	2 x SR44W

**C061****CO-AX INDICATOR**

WITH POSITIONING ROD

Dial indicator	Ø 40 mm
Max Range	4,9 mm
Reading	0,01 mm
Max speed	800 rpm
Cylindric shank	Ø 10 mm
Straight feelers	3
Bent feelers	3
Feeler length	50 - 100 - 150 mm
Contact point	Ø 3 mm
Scriber point	50 mm

C016**€ 152,32****DIAL DEPTH GAUGE**

Range	0 ÷ 110 mm
Dial indicator range	0 ÷ 10 mm
Base dimensions	63 x 17 mm
Reading	0,01 mm
Extensions Pcs	10

C062**€ 36,40****MECHANICAL EDGE FINDER**

Shank	Ø 10 mm
Anvil	Ø 4 - 10 mm

**C063/L****€ 85,34****ELECTRONIC EDGE FINDER**

WITH LED LIGHT AND AUDIBLE BEEP

Shank	Ø 20 mm
Contact point	Ø 10 mm
Total length	160 mm
Weight	120 g
Power	2 x LR1 1.5 V



M021-
ELECTRONIC DIGITAL MICROMETER

FRICION THIMBLE WITH CARBIDE FACES, FUNCTIONS: ABS/INC, SET, ON/OFF AND mm/INCH



DIN 863

Art.	€	Size	Reading	Accuracy
M021/00/25	€ 88,70	0 ÷ 25 mm - 0 ÷ 1"	0,001 mm - 0.0005"	0,003 mm - 0.00015"
M021/25/50	€ 110,88	25 ÷ 50 mm - 1" ÷ 2"	0,001 mm - 0.0005"	0,003 mm - 0.00015"
M021/50/75	€ 133,28	50 ÷ 75 mm - 2" ÷ 3"	0,001 mm - 0.0005"	0,004 mm - 0.0002"
M021/75/100	€ 155,68	75 ÷ 100 mm - 3" ÷ 4"	0,001 mm - 0.0005"	0,004 mm - 0.0002"

M022-
CHROMED OUTSIDE MICROMETER

WITH BIG 100 STEP GRADUATION THIMBLE WITH CARBIDE FACES AND FRICTION ON THIMBLE



DIN 863

Art.	€	Size	Reading	Accuracy
M022/00/25	€ 65,18	0 ÷ 25 mm	0,01 mm	0,004 mm
M022/25/50	€ 81,09	25 ÷ 50 mm	0,01 mm	0,004 mm
M022/50/75	€ 95,42	50 ÷ 75 mm	0,01 mm	0,005 mm
M022/75/100	€ 109,64	75 ÷ 100 mm	0,01 mm	0,005 mm

M033-
CHROMED OUTSIDE MICROMETER

WITH CARBIDE FACES AND PAINTED FRAME



DIN 863

Art.	€	Size	Reading	Spindle
M033/00/25	€ 23,86	0÷25 mm	0,01 mm	ø 6,3 mm
M033/25/50	€ 33,49	25÷50 mm	0,01 mm	ø 6,3 mm
M033/50/75	€ 37,41	50÷75 mm	0,01 mm	ø 6,3 mm
M033/75/100	€ 41,44	75÷100 mm	0,01 mm	ø 6,3 mm

M026-
ELECTRONIC DIGITAL MICROMETER

FRICION THIMBLE WITH CARBIDE FACES



DIN 863

Art.	€	Size	Reading	Accuracy
M026/0/25	€ 172,48	0 ÷ 25 mm - 0 ÷ 1"	0,001 mm - 0.0001"	0,0002 mm - 0.00008"
M026/25/50	€ 215,04	25 ÷ 50 mm - 1" ÷ 2"	0,001 mm - 0.0001"	0,0002 mm - 0.00008"
M026/50/75	€ 231,84	50 ÷ 75 mm - 2" ÷ 3"	0,001 mm - 0.0001"	0,0003 mm - 0.00012"
M026/75/100	€ 256,48	75 ÷ 100 mm - 3" ÷ 4"	0,001 mm - 0.0001"	0,0003 mm - 0.00012"

M033

€ 189,28

OUTSIDE MICROMETER SET

WITH CARBIDE FACES AND PAINTED FRAME



DIN 863

Size	0÷25 - 25÷50 - 50÷75 - 75÷100 - 100÷125 - 125÷150 mm
Reading	0,01 mm
Accuracy	0,004 - 0,004 - 0,005 - 0,005 - 0,006 - 0,006 mm
Rail	Ø 6,3 mm

M033-x
CHROMED OUTSIDE MICROMETER

WITH CARBIDE FACES AND PAINTED FRAME



DIN 863

Art.	€	Size	Reading	Spindle
M033/100/125	€ 44,35	100÷125 mm	0,01 mm	ø 6,3 mm
M033/125/150	€ 47,26	125÷150 mm	0,01 mm	ø 6,3 mm
M033/150/175	€ 56,56	150÷175 mm	0,01 mm	ø 6,3 mm
M033/175/200	€ 64,40	175÷200 mm	0,01 mm	ø 6,3 mm
M033/200/225	€ 74,70	200÷225 mm	0,01 mm	ø 6,3 mm
M033/225/250	€ 91,28	225÷250 mm	0,01 mm	ø 6,3 mm
M033/250/275	€ 93,97	250÷275 mm	0,01 mm	ø 6,3 mm
M033/275/300	€ 105,50	275÷300 mm	0,01 mm	ø 6,3 mm

M009-

CHROMED OUTSIDE MICROMETER

WITH CARBIDE FACES AND PAINTED FRAME



DIN 863

Art.	€	Size	Reading	Spindle
M009/300/400	€ 324,80	300 ÷ 400 mm	0,01 mm	ø 6,5 mm
M009/400/500	€ 355,04	400 ÷ 500 mm	0,01 mm	ø 6,5 mm
M009/500/600	€ 409,92	500 ÷ 600 mm	0,01 mm	ø 6,5 mm
M009/600/700	€ 487,20	600 ÷ 700 mm	0,01 mm	ø 6,5 mm
M009/700/800	€ 584,64	700 ÷ 800 mm	0,01 mm	ø 6,5 mm
M009/800/900	€ 675,36	800 ÷ 900 mm	0,01 mm	ø 6,5 mm
M009/900/1000	€ 801,92	900 ÷ 1000 mm	0,01 mm	ø 6,5 mm
M009/1000/1200	€ 1187,20	1000 ÷ 1200 mm	0,01 mm	ø 6,5 mm

M019-

BLIND HOLE THREE POINT INSIDE MICROMETER

BLIND HOLE THREE POINT INSIDE MICROMETER



Art.	€	Ring	Size	Reading	Accuracy
M019/06/08	€ 362,88	1	6 ÷ 8 mm	0,001 mm	0,004 mm
M019/08/10	€ 362,88	1	8 ÷ 10 mm	0,001 mm	0,004 mm
M019/10/12	€ 362,88	1	10 ÷ 12 mm	0,001 mm	0,004 mm
M019/12/16	€ 339,36	1	12 ÷ 16 mm	0,005 mm	0,004 mm
M019/16/20	€ 339,36	1	16 ÷ 20 mm	0,005 mm	0,004 mm
M019/20/25	€ 364,00	1	20 ÷ 25 mm	0,005 mm	0,004 mm
M019/25/30	€ 364,00	1	25 ÷ 30 mm	0,005 mm	0,004 mm
M019/30/40	€ 400,96	1	30 ÷ 40 mm	0,005 mm	0,004 mm
M019/40/50	€ 478,24	1	40 ÷ 50 mm	0,005 mm	0,005 mm
M019/50/63	€ 487,20	1	50 ÷ 63 mm	0,005 mm	0,005 mm
M019/62/75	€ 539,84	1	62 ÷ 75 mm	0,005 mm	0,005 mm
M019/75/88	€ 546,56	1	75 ÷ 88 mm	0,005 mm	0,005 mm
M019/87/100	€ 546,56	1	87 ÷ 100 mm	0,005 mm	0,005 mm
M019/100/125	€ 608,16	0	100 ÷ 125 mm	0,005 mm	0,005 mm
M019/125/150	€ 670,88	0	125 ÷ 150 mm	0,005 mm	0,005 mm

M013/0/100

DEPTH MICROMETER

Range	0 ÷ 25 mm, 25 ÷ 50 mm, 50 ÷ 75 mm, 75 ÷ 100 mm
Reading	0,01 mm
Base	100 x 17 mm

M010-

DISC MICROMETER

PAINTED FRAME



DIN 863

Art.	€	Size	Reading	Discs
M010/0/25	€ 101,92	0 ÷ 25 mm	0,01 mm	Ø 20 mm
M010/25/50	€ 125,44	25 ÷ 50 mm	0,01 mm	Ø 20 mm
M010/50/75	€ 132,16	50 ÷ 75 mm	0,01 mm	Ø 20 mm
M010/75/100	€ 138,88	75 ÷ 100 mm	0,01 mm	Ø 20 mm
M010/100/125	€ 176,96	100 ÷ 125 mm	0,01 mm	Ø 27 mm
M010/125/150	€ 200,48	125 ÷ 150 mm	0,01 mm	Ø 27 mm
M010/150/175	€ 222,88	150 ÷ 175 mm	0,01 mm	Ø 27 mm
M010/175/200	€ 235,20	175 ÷ 200 mm	0,01 mm	Ø 27 mm

M019-x

BLIND HOLE THREE POINT INSIDE MICROMETER SET



Art.	€	Micrometers	Rings	Size	Reading	Accuracy
M019/06/12	€ 943,04	3	3	6 ÷ 12 mm	0,001 mm	0,004 mm
M019/12/20	€ 514,08	2	1	12 ÷ 20 mm	0,005 mm	0,004 mm
M019/20/40	€ 1000,16	3	2	20 ÷ 40 mm	0,005 mm	0,004 mm
M019/40/100	€ 2206,40	5	3	40 ÷ 100 mm	0,005 mm	0,005 mm

€ 115,36



B0x

METRIC GAUGE BLOCK SET

INSPECTION CERTIFICATE ISSUED BY THE FACTORY, SIT CERTIFICATE UPON REQUEST



DIN 863

Art.	€	Grade	Nr. blocks	Nominal size	Increment	Pcs by step
B011/0	€ 194,88	0	11	2,5 - 5,1 - 7,7 - 10,3 - 12,9 - 15 - 17,6 - 20,2 - 22,8 - 23,4 - 25 mm	mm	1
B032/1	€ 244,16	1	32	1,005 1,01±1,09 1,1±1,9 1 ÷ 9 10 - 20 - 30 - 50 mm	- 0,01 0,1 1 mm	1 9 9 9 4
B047/0	€ 560,00	1	47	1,005 1,01±1,2 1,3±1,9 1 ÷ 9 10 ÷ 100 mm	- 0,01 0,1 1 10 mm	1 20 7 9 10
B047/1	€ 331,52	1	87	1,001±1,009 1,01±1,49 0,5÷9,5 10÷100 mm	0,001 0,01 0,5 10 mm	9 49 19 10
B087/0	€ 931,84	0	47	1,005 1,01±1,2 1,3±1,9 1 ÷ 9 10 ÷ 100 mm	- 0,01 0,1 1 10 mm	1 20 7 9 10
B087/1	€ 499,52	1	112	1,005 1,001 ÷ 1,009 1,01 ÷ 1,49 0,5 ÷ 24,5 25 - 50 - 75 - 100 mm	- 0,001 0,01 0,5 25 mm	1 9 49 49 4
B112/0	€ 938,56	0	87	1,001±1,009 1,01±1,49 0,5÷9,5 10÷100 mm	0,001 0,01 0,5 10 mm	9 49 19 10
B112/1	€ 661,92	0	112	1,005 1,001 ÷ 1,009 1,01 ÷ 1,49 0,5 ÷ 24,5 25 - 50 - 75 - 100 mm	- 0,001 0,01 0,5 25 mm	1 9 49 49 4
B008/1	€ 943,04	1	8	25 - 50 - 75 - 100 - 250 - 300 - 400 - 500 mm		1

C025-**H7 HOLE PLAIN GAUGE WITH "GO" & "NO GO" CHECKS MADE OF HARDENED ALLOY STEEL**

Art.	€	Ø	Pieces
C025/03	€ 31,47	3 mm	1
C025/04	€ 31,47	4 mm	1
C025/05	€ 31,47	5 mm	1
C025/06	€ 31,47	6 mm	1
C025/07	€ 31,47	7 mm	1
C025/08	€ 31,47	8 mm	1
C025/09	€ 31,47	9 mm	1
C025/10	€ 31,47	10 mm	1
C025/11	€ 38,98	11 mm	1
C025/12	€ 38,98	12 mm	1
C025/13	€ 38,98	13 mm	1
C025/14	€ 38,98	14 mm	1
C025/15	€ 38,98	15 mm	1
C025/16	€ 38,98	16 mm	1
C025/17	€ 38,98	17 mm	1
C025/18	€ 38,98	18 mm	1
C025/19	€ 38,98	19 mm	1
C025/20	€ 38,98	20 mm	1
C025/21	€ 58,35	21 mm	1
C025/22	€ 58,35	22 mm	1
C025/23	€ 58,35	23 mm	1
C025/24	€ 58,35	24 mm	1
C025/25	€ 58,35	25 mm	1
C025/26	€ 58,35	26 mm	1
C025/27	€ 58,35	27 mm	1
C025/28	€ 58,35	28 mm	1
C025/29	€ 58,35	29 mm	1
C025/30	€ 73,14	30 mm	1
C025/32	€ 73,14	32 mm	1
C025/33	€ 73,14	33 mm	1
C025/34	€ 73,14	34 mm	1
C025/35	€ 73,14	35 mm	1
C025/36	€ 73,14	36 mm	1
C025/37	€ 73,14	37 mm	1

Art.	€	Ø	Pieces
C025/38	€ 73,14	38 mm	1
C025/40	€ 73,14	40 mm	1
C025/42	€ 73,14	42 mm	1
C025/44	€ 73,14	44 mm	1
C025/45	€ 82,21	45 mm	1
C025/46	€ 82,32	46 mm	1
C025/47	€ 82,32	47 mm	1
C025/48	€ 82,32	48 mm	1
C025/50	€ 82,32	50 mm	1
C025/51	€ 88,26	51 mm	2
C025/52	€ 88,26	52 mm	2
C025/55	€ 88,26	55 mm	2
C025/56	€ 88,26	56 mm	2
C025/57	€ 88,26	57 mm	2
C025/58	€ 88,26	58 mm	2
C025/59	€ 88,26	59 mm	2
C025/60	€ 88,26	60 mm	2
C025/62	€ 106,74	62 mm	2
C025/63	€ 106,74	63 mm	2
C025/65	€ 106,74	65 mm	2
C025/66	€ 106,74	66 mm	2
C025/67	€ 106,74	67 mm	2
C025/68	€ 106,74	68 mm	2
C025/69	€ 106,74	69 mm	2
C025/70	€ 141,12	70 mm	2
C025/71	€ 141,12	71 mm	2
C025/72	€ 141,12	72 mm	2
C025/74	€ 141,12	74 mm	2
C025/75	€ 141,12	75 mm	2
C025/76	€ 141,12	76 mm	2
C025/78	€ 141,12	78 mm	2
C025/80	€ 141,12	80 mm	2

**C025-3x****H7 HOLE PLAIN GAUGE SET "GO" & "NO GO"**

Art.	€	Pieces	Pitch	Ø
C025/3/30	€ 990,08	28	1 mm	3 ÷ 30 mm
C025/32/62	€ 1187,20	16	-	32-35-37-38-40-42-45-47-48-50-52-55-56-58-60-62 mm

A015-**RING GAUGE FOR ZERO SETTING**

6G ACCURACY



Art.	€	Size
A015/008	€ 47,60	8 mm
A015/010	€ 53,42	10 mm
A015/011	€ 53,42	11 mm
A015/017	€ 58,35	17 mm
A015/025	€ 58,35	25 mm
A015/035	€ 58,35	35 mm
A015/040	€ 99,34	40 mm
A015/062	€ 109,76	62 mm
A015/087	€ 259,84	87 mm
A015/100	€ 273,28	100 mm
A015/125	€ 423,36	125 mm
A015/150	€ 593,60	150 mm

T048x

THREAD PLUG GAUGE "GO" & "NO GO"

CYLINDRIC BSP



ISO 228/1

Art.	€	Dimensions
T0481/8	€ 59,14	1/8" - 28 TPI
T0481/4	€ 59,14	1/4" - 19 TPI
T0483/8	€ 59,14	3/8" - 19 TPI
T0481/2	€ 76,16	1/2" - 14 TPI
T0485/8	€ 88,82	5/8" - 14 TPI
T0483/4	€ 94,86	3/4" - 14 TPI
T0487/8	€ 123,20	7/8" - 14 TPI
T0481	€ 144,48	1" - 11 TPI

A018x

"GO" SCREW GAUGE

"GO" SCREW GAUGE, CYLINDRIC BSP



ISO 228/1

Art.	€	Dimensions
A0181/8	€ 61,04	1/8" - 28 TPI
A0181/4	€ 61,04	1/4" - 19 TPI
A0183/8	€ 61,04	3/8" - 19 TPI
A0181/2	€ 83,66	1/2" - 14 TPI
A0185/8	€ 83,66	5/8" - 14 TPI
A0183/4	€ 101,58	3/4" - 14 TPI
A0187/8	€ 123,20	7/8" - 14 TPI
A0181	€ 89,60	1" - 11 TPI

T049x

6H "GO" & "NO GO" ISOMETRIC THREAD PLUG GAUGE



Art.	€	Dimensions
T0493X0.5	€ 54,21	3 x 0,5 mm
T0494X0.7	€ 69,78	4 x 0,7 mm
T0495X0.8	€ 72,24	5 x 0,8 mm
T0496X1	€ 72,24	6 x 1 mm
T0498X1	€ 65,74	8 x 1 mm
T0498X1.25	€ 65,74	8 x 1,25 mm
T04910X1	€ 67,31	10 x 1 mm
T04910X1.25	€ 67,31	10 x 1,25 mm
T04910X1.5	€ 67,31	10 x 1,5 mm
T04912X1.25	€ 67,31	12 x 1,25 mm
T04912X1.5	€ 67,31	12 x 1,5 mm
T04912X1.75	€ 67,31	12 x 1,75 mm
T04914X1.5	€ 72,24	14 x 1,5 mm
T04914X2	€ 72,24	14 x 2 mm
T04916X1.5	€ 75,38	16 x 1,5 mm
T04916X2	€ 75,38	16 x 2 mm
T04918X1.5	€ 56,00	18 x 1,5 mm
T04918X2.5	€ 56,00	18 x 2,5 mm
T04920X1.5	€ 61,26	20 x 1,5 mm
T04920X2.5	€ 61,26	20 x 2,5 mm
T04922X1.5	€ 62,72	22 x 1,5 mm
T04922X2.5	€ 62,72	22 x 2,5 mm
T04924X1.5	€ 65,74	24 x 1,5 mm
T04924X2	€ 65,74	24 x 2 mm
T04924X3	€ 65,74	24 x 3 mm

A017x

6G "GO" ISOMETRIC SCREW GAUGE



Art.	€	Dimensions
A0173X0.5	€ 52,53	3 x 0,5 mm
A0174X0.7	€ 59,14	4 x 0,7 mm
A0175X0.8	€ 59,14	5 x 0,8 mm
A0176X1	€ 49,28	6 x 1 mm
A0178X1	€ 49,28	8 x 1 mm
A0178X1.25	€ 49,28	8 x 1,25 mm
A01710X1	€ 69,78	10 x 1 mm
A01710X1.25	€ 54,21	10 x 1,25 mm
A01710X1.5	€ 54,21	10 x 1,5 mm
A01712X1.25	€ 75,38	12 x 1,25 mm
A01712X1.5	€ 75,38	12 x 1,5 mm
A01712X1.75	€ 75,38	12 x 1,75 mm
A01714X1.5	€ 75,38	14 x 1,5 mm
A01714X2	€ 75,38	14 x 2 mm
A01716X1.5	€ 79,86	16 x 1,5 mm
A01716X2	€ 79,86	16 x 2 mm
A01718X1.5	€ 56,00	18 x 1,5 mm
A01718X2.5	€ 56,00	18 x 2,5 mm
A01720X1.5	€ 59,02	20 x 1,5 mm
A01720X2.5	€ 59,02	20 x 2,5 mm
A01722X1.5	€ 67,20	22 x 1,5 mm
A01722X2.5	€ 67,20	22 x 2,5 mm
A01724X1.5	€ 89,60	24 x 1,5 mm
A01724X2	€ 89,60	24 x 2 mm
A01724X3	€ 89,60	24 x 3 mm

S091-

STEEL PLUG GAUGE SET

Art.	€	Pieces	Size	Increment	Length	Hardness	Accuracy
S091	€ 434,56	91	1÷10 mm	0,1 mm	50 mm	HRC-60-62	±0,002 mm
S091/61		61	10÷16 mm	0,1 mm	50 mm	HRC-60-62	±0,002 mm



T009**€ 29,57****DIAL INDICATOR HOLDER**

Shank	Ø 8 mm
Female junction	Ø 4 mm

B201/2**€ 18,26****MAGNETIC BASE**

N35 MAGNETIC MATERIAL, ABS SWITCH AND PRISMATIC BASE



Base dimensions	60 x 50 x 55 mm
Hole	M8 x 1,25
Hold capacity	800 N
Weight	1 kg

B201/4**€ 33,60****MAGNETIC BASE**

N35 MAGNETIC MATERIAL, ABS SWITCH AND PRISMATIC BASE



Base dimensions	117 x 50 x 55 mm
Hole	M8 x 1,25
Hold capacity	1300 N
Weight	2 kg

B201/1**€ 15,34****MAGNETIC BASE**

N35 MAGNETIC MATERIAL, ABS SWITCH AND PRISMATIC BASE



Base dimensions	36 x 30 x 35 mm
Hole	M5 x 0,8
Hold capacity	300 N
Weight	0,2 kg

B201/3**€ 24,08****MAGNETIC BASE**

N35 MAGNETIC MATERIAL, ABS SWITCH AND PRISMATIC BASE



Base dimensions	73 x 50 x 55 mm
Hole	M8 x 1,25
Hold capacity	1000 N
Weight	1,25 kg

B100**€ 21,95****MAGNETIC STAND**

ABS SWITCH AND PRISMATIC BASE



Overall sizes	63 x 50 x 55h mm
Hole	M8 x 1,25
Magnetic force	600 N



S052/2
€ 28,90
MAGNETIC STAND

 WITH MICROMETRIC ADJUSTMENT, STURDY COLUMN AND ADJUSTABLE ARM.
 MAGNETIC BASE WITH PRISMATIC SUPPORT AND SWITCH


Main stem	ø 12 x 176 mm
Assistant stem	ø 10 x 150 mm
Magnetic force	800 N
Base dimensions	60 x 50 x 55 mm
Weight	1,5 kg

S052/4
€ 74,03
MAGNETIC STAND

 WITH MICROMETRIC ADJUSTMENT, STURDY COLUMN AND ADJUSTABLE ARM.
 MAGNETIC BASE WITH PRISMATIC SUPPORT AND SWITCH


Main stem	ø 20 x 355 mm
Assistant stem	ø 14 x 210 mm
Magnetic force	1300 N
Base dimensions	117 x 50 x 55 mm
Weight	3 kg

S047
€ 61,04
MAGNETIC STAND

WITH MICROADJUSTMENT



Main stem	ø 16 x 220 mm
Assistant stem	ø 12 x 180 mm
Magnetic force	800 N
Base dimensions	65 x 50 x 55h mm

S052/3
€ 49,95
MAGNETIC STAND

 WITH MICROMETRIC ADJUSTMENT, STURDY COLUMN AND ADJUSTABLE ARM.
 MAGNETIC BASE WITH PRISMATIC SUPPORT AND SWITCH


Main stem	ø 16 x 225 mm
Assistant stem	ø 14 x 165 mm
Magnetic force	1000 N
Base dimensions	73 x 50 x 55 mm
Weight	2 kg

S049
€ 32,59
MAGNETIC STAND

WITH MICROADJUSTMENT



Main stem	ø 12 x 170 mm
Assistant stem	ø 10 x 150 mm
Magnetic force	600 N
Base dimensions	63 x 50 x 55h mm

S054
€ 29,57
MAGNETIC STAND


Main stem	ø 12 x 170 mm
Assistant stem	ø 10 x 140 mm
Magnetic force	600 N
Base dimensions	63 x 50 x 55h mm

S055**€ 57,57****MAGNETIC STAND**

Main stem	Ø 16 x 210 mm
Assistant stem	Ø 12 x 175 mm
Magnetic force	800 N
Base dimensions	75 x 50 x 55h mm

S042/1**€ 53,20****UNIVERSAL MECHANICAL ARM STAND**

WITH 3D CENTRAL LOCK



Base dimensions	36 x 30 x 35 mm
Magnetic force	300 N
Arm length	145 mm
Weight	0,5 kg

S042/2**€ 67,31****UNIVERSAL MECHANICAL ARM STAND**

WITH MICROMETRIC ADJUSTMENT AND 3D CENTRAL LOCK



Base dimensions	60 x 50 x 55 mm
Magnetic force	800 N
Arm length	290 mm
Weight	1,4 kg

S042/3**€ 86,58****UNIVERSAL MECHANICAL ARM STAND**

WITH MICROMETRIC ADJUSTMENT AND 3D CENTRAL LOCK



Base dimensions	75 x 50 x 55 mm
Magnetic force	1000 N
Arm length	365 mm
Weight	1,7 kg

S045**€ 68,32****UNIVERSAL MECHANICAL ARM STAND**

Main stem	Ø 12 x 160 mm
Assistant stem	Ø 10 x 180 mm
Magnetic force	600 N
Base dimensions	63 x 50 x 55h mm

S046**€ 104,61****HYDRAULIC UNIVERSAL MAGNETIC STAND**

Main stem	Ø 12 x 180 mm
Assistant stem	Ø 10 x 200 mm
Magnetic force	600 N
Base dimensions	63 x 50 x 55h mm



S041/1

€ 43,23

MINI MAGNETIC STAND

FOR DIAL INDICATOR, WITH FLAT SUPPORT SURFACE AND OPTIMAL ADHESION.



Base dimensions	73 x 37 x 12 mm
Hold capacity	200 N
Weight	0,16 kg

S041/2

€ 64,40

MINI MAGNETIC STAND

WITH PRISMATIC BASE, SUITABLE FOR DIAL INDICATOR, OPTIMAL ADHESION.



Base dimensions	73 x 37 x 26 mm
Hold capacity	200 N
Weight	0,3 kg

B025

€ 201,60

DIAL GAUGE STAND

WITH GROOVED STEEL PLATE AND GRANITE BASE



Dial stand	ø 8 mm
Table dimensions	80 x 80 mm
Base dimensions	150 x 100 mm
Column	ø 25 x 180 mm
Weight	3,8 kg

B010

€ 248,64

DIAL GAUGE STAND

WITH GRANITE BASE



Dial stand	ø 8 mm
Base dimensions	300 x 200 x 50h mm
Column	ø 35 x 300 mm
Base flatness	0,002 mm
Weight	13 kg

A019-
ECCENTRICITY BENCH TESTER

WITH DIAL STAND



Cast iron

Art.	€	Distance between centers	Centers height Min. - Max	MT	Dimensions	Weight	Dial stand
A019/300	€ 1131,20	300 mm	145 / 175 mm	2	730 x 310 x 370h mm	43 kg	2
A019/500	€ 1444,80	500 mm	135 / 170 mm	2	924 x 330 x 482h mm	86 kg	2
A019/1000	€ 1702,40	1000 mm	135 / 170 mm	2	1400 x 330 x 430h mm	104 kg	2

S051**€ 29,12****MICROMETER STAND**

WITH PLASTIC COVERED JAWS



CAST IRON

P04x**GRANITE INSPECTION PLATE**

GRADE 00



DIN 876

Art.	€	Dimensions	Weight
P040	€ 81,09	310 x 230 x 80 mm	21 kg
P042	€ 259,84	630 x 400 x 100 mm	87 kg
P043	€ 696,64	1000 x 630 x 150 mm	322 kg
P047	€ 1153,60	1200 x 800 x 160 mm	497 kg
P044	€ 2441,60	1600 x 1000 x 200 mm	1059 kg

S06x**GRANITE SQUARE**

GRADE 0



DIN 876

Art.	€	Dimensions	Accuracy
S061	€ 386,40	250 x 40 x 400h mm	± 6 µm
S062	€ 545,44	400 x 100 x 600h mm	± 9 µm

A009**€ 675,36****GAUGE BLOCK ACCESSORIES**

15 Pcs

Holding device	n° 3 (50-100-200 mm)
Radius jaw couple	n° 3 (2°- 5°- 10°)
Scriber	n° 1
Center point	n° 1
Straight jaws	n° 2 (100 mm)
Couple large diam. jaws	n° 1

B040-**GRANITE SURFACE STAND WITH TWO DRAWERS**

Art.	€	Base dimensions	Plate Dimensions	Weight
B040/1	€ 817,60	945 x 590 mm	1000 x 630 mm	66 kg
B040/2	€ 912,80	1200 x 750 mm	1200 x 800 - 1600 x 1000 mm	77 kg

S050-**90° SQUARE**

WITH BACK



STEEL DIN 875/1

Art.	€	Dimensions	Section
S050/150	€ 31,02	150 x 100 mm	25,5 x 4,8 mm ²
S050/200	€ 39,42	200 x 130 mm	28 x 6,5 mm ²
S050/250	€ 52,64	250 x 160 mm	31 x 9 mm ²
S050/300	€ 58,58	300 x 200 mm	36 x 9 mm ²
S050/400	€ 129,92	400 x 265 mm	39 x 9 mm ²
S050/500	€ 155,68	500 x 330 mm	50 x 9 mm ²

S051-
90° SQUARE

WITH BACK, CHEAP TYPE



STEEL

Art.	€	Dimensions	Section
S051/150	€ 18,48	150 x 100 mm	20 x 5,5 mm ²
S051/200	€ 21,17	200 x 130 mm	20 x 5,5 mm ²
S051/250	€ 24,98	250 x 160 mm	25 x 5,5 mm ²
S051/300	€ 31,25	300 x 175 mm	25 x 5,5 mm ²
S051/400	€ 34,61	400 x 200 mm	29,5 x 5,5 mm ²
S051/500	€ 36,29	500 x 250 mm	29,5 x 5,5 mm ²

0286-
YELLOW PAINTED JOINER SQUARE


Art.	€	Dimensions
0286/250	€ 2,62	250 x 130 x 0,8 mm
0286/300	€ 3,09	300 x 130 x 0,8 mm
0286/350	€ 3,44	350 x 155 x 0,8 mm

0132-
BEVEL SQUARE
CAT 42


Art.	€	Blade length	Blade section	Handle section	Weight
0132/200	€ 18,48	200 mm	29 x 1.6 mm	30 x 11.5 mm	0.22 kg
0132/250	€ 19,94	250 mm	29 x 1.6 mm	30 x 11.5 mm	0.25 kg
0132/300	€ 21,62	300 mm	29 x 1.6 mm	30 x 11.5 mm	0.28 kg

S048-
STAINLESS STEEL 90° KNIFE EDGE SQUARE


DIN 875/00

Art.	€	Dimensions	Section
S048/100	€ 32,93	100 x 70 mm	20 x 5 mm ²
S048/150	€ 49,95	150 x 100 mm	25 x 5 mm ²

0129-
CARPENTER TRY SQUARE
CAT 42


Aluminium

Art.	€	Blade length	Blade section	Handle length	Handle section	Weight
0129/150	€ 19,49	150 mm	40 x 2 mm	130 mm	40 x 12 mm	0.19 kg
0129/200	€ 19,49	200 mm	40 x 2 mm	130 mm	40 x 12 mm	0.20 kg
0129/250	€ 21,28	250 mm	40 x 2 mm	145 mm	40 x 12 mm	0.21 kg
0129/300	€ 22,74	300 mm	40 x 2 mm	145 mm	40 x 12 mm	0.22 kg
0129/400	€ 27,44	400 mm	40 x 2 mm	170 mm	40 x 12 mm	0.24 kg
0129/500	€ 29,90	500 mm	40 x 2 mm	170 mm	40 x 12 mm	0.26 kg

0139-
MITRE SQUARE
CAT 42


Aluminium

Art.	€	Blade length	Blade section	Handle section	Angle	Weight
0139/250	€ 20,27	250 mm	40 x 2 mm	40 x 12 mm	45° / 135°	0.22 kg
0139/300	€ 21,39	300 mm	40 x 2 mm	40 x 12 mm	45° / 135°	0.24 kg

S056-**90° MAGNETIC SQUARE**

Art.	€	Dimensions	Max. magnetic force	Weight
S056/150	€ 76,16	150 x 150 x 50 mm	500 N	2,2 kg
S056/200	€ 95,20	200 x 200 x 50 mm	1000 N	3,2 kg

S058**TITLTABLE MAGNETIC SQUARE**

€ 87,81



Dimensions	115 x 115 x 35 mm
Degrees	45° ÷ 90°
Max. magnetic force	250 N
Weight	1,5 kg

S057/125

€ 17,70

WELDING HOLDER

Overall sizes	135 x 135 x 25 mm
Hold capacity	340 N
Hold working angle	45 - 90 - 135°
Weight	1,1 kg

S057/060S

€ 11,98

MINI WELDING HOLDER

4 Pcs

Overall sizes	50 x 60 x 12,5 mm
Hold capacity	45 N
Hold working angle	45 - 90 - 135°
Weight	0,4 kg

0212

€ 7,39

FEELER

Feelers num.	20
Sizes	0,05 - 1,00 mm



FGx
CAT 42
FEELER GAUGE SET
 Harmonic steel

Art.	€	Feelers num.	Sizes	Blade length	Weight
FG01	€ 4,09	13	0.05 - 1.00 mm 0.002 - 0.040"	100 mm	0.07 kg
FG02	€ 6,94	20	0.05 - 1.00 mm 0.002 - 0.040"	100 mm	0.10 kg


FGx-AI
CAT 42
FEELER GAUGE SET, STAINLESS STEEL
 Stainless steel

Art.	€	Feelers num.	Sizes	Blade length	Weight
FG01/AI	€ 12,10	13	0.05 - 1.00 mm 0.002 - 0.040"	100 mm	0.07 kg
FG02/AI	€ 19,38	20	0.05 - 1.00 mm 0.002 - 0.040"	100 mm	0.10 kg


TGx-AE
CAT 42
THICKNESS GAUGE FOIL
 Harmonic steel

Art.	€	Thickness	Length	Weight
TG001/AE	€ 56,34	0.01 mm 0.0004"	5 m	0.04 kg
TG002/AE	€ 43,68	0.02 mm 0.0008"	5 m	0.04 kg
TG003/AE	€ 24,08	0.03 mm 0.0012"	5 m	0.05 kg
TG004/AE	€ 24,98	0.04 mm 0.0016"	5 m	0.05 kg
TG005/AE	€ 17,47	0.05 mm 0.0020"	5 m	0.05 kg
TG006/AE	€ 17,47	0.06 mm 0.0024"	5 m	0.06 kg
TG007/AE	€ 17,47	0.07 mm 0.0028"	5 m	0.06 kg
TG008/AE	€ 17,47	0.08 mm 0.0030"	5 m	0.07 kg
TG009/AE	€ 17,47	0.09 mm 0.0035"	5 m	0.07 kg
TG010/AE	€ 17,47	0.10 mm 0.0040"	5 m	0.08 kg
TG012/AE	€ 17,47	0.12 mm 0.005"	5 m	0.09 kg
TG015/AE	€ 16,13	0.15 mm 0.006"	5 m	0.10 kg
TG018/AE	€ 17,47	0.18 mm 0.007"	5 m	0.11 kg
TG020/AE	€ 16,13	0.20 mm 0.008"	5 m	0.13 kg
TG025/AE	€ 16,13	0.25 mm 0.010"	5 m	0.15 kg
TG030/AE	€ 16,13	0.30 mm 0.012"	5 m	0.18 kg
TG035/AE	€ 17,47	0.35 mm 0.014"	5 m	0.21 kg
TG040/AE	€ 17,47	0.40 mm 0.016"	5 m	0.26 kg
TG045/AE	€ 17,47	0.45 mm 0.018"	5 m	0.28 kg
TG050/AE	€ 17,47	0.50 mm 0.020"	5 m	0.34 kg

Art.	€	Thickness	Length	Weight
TG055/AE	€ 24,98	0.55 mm 0.022"	5 m	0.36 kg
TG060/AE	€ 24,98	0.60 mm 0.024"	5 m	0.37 kg
TG065/AE	€ 24,98	0.65 mm 0.026"	5 m	0.43 kg
TG070/AE	€ 21,50	0.70 mm 0.028"	5 m	0.54 kg
TG075/AE	€ 21,50	0.75 mm 0.030"	5 m	0.57 kg
TG080/AE	€ 21,50	0.80 mm 0.032"	5 m	0.59 kg
TG085/AE	€ 21,50	0.85 mm 0.034"	5 m	0.61 kg
TG090/AE	€ 21,50	0.90 mm 0.036"	5 m	0.64 kg
TG095/AE	€ 21,50	0.95 mm 0.038"	5 m	0.67 kg
TG100/AE	€ 21,50	1.00 mm 0.040"	5 m	0.69 kg
TG110/AE	€ 16,35	1.10 mm	1 m	0.11 kg
TG120/AE	€ 16,35	1.20 mm	1 m	0.11 kg
TG130/AE	€ 16,35	1.30 mm	1 m	0.12 kg
TG140/AE	€ 16,35	1.40 mm	1 m	0.13 kg
TG150/AE	€ 16,35	1.50 mm	1 m	0.14 kg
TG160/AE	€ 16,35	1.60 mm	1 m	0.15 kg
TG170/AE	€ 16,35	1.70 mm	1 m	0.16 kg
TG180/AE	€ 16,35	1.80 mm	1 m	0.17 kg
TG190/AE	€ 16,35	1.90 mm	1 m	0.18 kg
TG200/AE	€ 16,35	2.00 mm	1 m	0.19 kg



HT125**CAT 42 € 6,50****HOLDER FOR FEELER GAUGE BLADES**

Dimensions	125 x 17 mm
Weight	0.12 kg

C026-**PRECISION DIVIDER
WITH SQUARE LEGS**

Art.	€	Length
C026/150	€ 8,18	150 mm
C026/200	€ 10,08	200 mm
C026/250	€ 13,78	250 mm
C026/300	€ 15,90	300 mm

C028-**OUTSIDE CALIPER**

Art.	€	Length
C028/150	€ 8,18	150 mm
C028/200	€ 10,08	200 mm
C028/250	€ 11,76	250 mm
C028/300	€ 13,78	300 mm

C058**€ 11,87****58 BLADE SCREW PITCH GAUGE SET**

Metric size	0.25 - 6 mm 60°
Whitworth size	4 - 62 TPI 55°
Gas size	8 - 28 TPI 55°

C027-**PRECISION DIVIDER
WITH SETTING WINGS AND SQUARE LEGS**

Art.	€	Length
C027/150	€ 11,42	150 mm
C027/200	€ 13,44	200 mm
C027/250	€ 16,69	250 mm
C027/300	€ 18,48	300 mm

C029-**INSIDE CALIPER**

Art.	€	Length
C029/150	€ 8,18	150 mm
C029/200	€ 10,08	200 mm
C029/250	€ 11,76	250 mm
C029/300	€ 13,78	300 mm



P007-

MAGNETIC VEE BLOCK

SINGLE OR COUPLE

Art.	€	Dimensions	Width	Max. magnetic force	Pieces	Weight
P007/1	€ 103,82	70 x 60 x 72 mm	38 mm	400 N	1	1,6 kg
P007/2	€ 133,28	100 x 70 x 95 mm	50 / 16 mm	300 N	1	3,7 kg
P007/1C	€ 197,12	71 x 60 x 73 mm	38 mm	400 N	2	3,2 kg
P007/2C	€ 303,52	100 x 70 x 95 mm	50 / 16 mm	300 N	2	7,4 kg



P30x

90° BLOCK AND CLAMP

SINGLE AND COUPLE

HARDENED STEEL

Art.	€	Dimensions	Max clamp	Accuracy	Pieces
P301/2	€ 58,13	63,5 x 63,5 x 50 mm	ø 35 mm	±0,01 mm	1
P302/2	€ 99,01	100 x 75 x 75 mm	ø 65 mm	±0,01 mm	1
P303/2	€ 152,32	150 x 125 x 100 mm	ø 110 mm	±0,01 mm	1
P301/2C	€ 112,00	63,5 x 63,5 x 50,8 mm	ø 35 mm	±0,01 mm	2
P302/2C	€ 194,88	100 x 75 x 75 mm	ø 65 mm	±0,01 mm	2
P303/2C	€ 304,64	150 x 125 x 100 mm	ø 110 mm	±0,01 mm	2



P20x

PARALLEL VEE BLOCKS

C45


Art.	€	Dimensions	Accuracy
P200/1	€ 211,68	75 x 75 x 60 mm	1/100 mm
P201/1	€ 281,12	100 x 80 x 60 mm	1/100 mm



P011-

ANGLE BLOCK

Art.	€	Dimensions	Weight
P011/075	€ 98,11	75 x 32 x 25 mm	1,1 kg
P011/100	€ 116,48	102 x 48 x 46 mm	1,3 kg

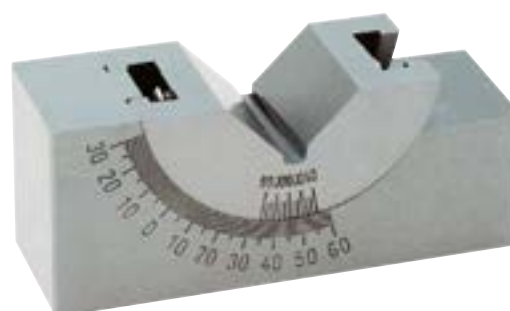

F2Gx**PRECISION TAPE**

WITH STEEL WIRE STOP MECHANISM AND RIVETED END HOOK WITH BOTTOM BLADE PROTECTOR BUILT IN SHOCK ABSORBER



Art.	€	Tape dimensions	Accuracy class
F2G2	€ 3,08	2 m x 16 mm	II
F2G3	€ 3,52	3 m x 16 mm	II
F2G5	€ 5,39	5 m x 19 mm	II

F68x**MAGNETIC PRECISION TAPE**

WITH STEEL WIRE STOP MECHANISM AND RIVETED END HOOK WITH BOTTOM BLADE PROTECTOR BUILT IN SHOCK ABSORBER



Art.	€	Tape dimensions	Accuracy class
F683	€ 5,71	3 m x 19 mm	II
F685	€ 8,06	5 m x 25 mm	II
F688	€ 11,54	8 m x 25 mm	II

F80x**PRECISION TAPE**

WITH ERGONOMIC SHAPE, COMFORTABLE STOPPER, POLYESTER FILM COATING, BELT CLIP, BLADE EXTRA STRONG. RESISTANCE TO ABRASIONS, EASY TO CONTROL



Art.	€	Tape dimensions	Accuracy class
F802	€ 2,43	2 m x 16 mm	II
F803	€ 3,95	3 m x 16 mm	II
F805	€ 5,59	5 m x 19 mm	II
F808	€ 8,06	8 m x 25 mm	II

F32x**MAGNETIC PRECISION TAPE**

WITH AUTOMATIC BRAKE AND MAGNET



Art.	€	Tape dimensions	Accuracy class
F322	€ 3,96	2 m x 16 mm	II
F323	€ 5,29	3 m x 19 mm	II
F325	€ 7,17	5 m x 25 mm	II
F328	€ 9,97	8 m x 25 mm	II

R0x**LONG TAPE**

MADE OF STEEL



Art.	€	Tape dimensions
R030	€ 24,19	30 m x 13 mm
R050	€ 37,41	50 m x 13 mm

0646/A**€ 110,54****AUTOLEVELLING LASER LEVEL**

Leveling accuracy	0,5 mm / m
Horizontal and vertical line accuracy	± 0,5 mm / m
Battery	3 x 1,5V AA
Laser type	Classe II / 650 nm
Recommended working distance	10 m
Max height	126,5 cm
Minimum height	52,5 cm
Weight	3 kg



NON DISPONIBILE

0666

€ 165,76

DIGITAL LEVEL WITH LASER

MEASURING UNIT IN DEGREES OR %



Length	600 mm
Auto power off	5 min
Measuring range	0 ~ 360°
Wave length	650 nm
Reading	0,1°
Laser power	<1 mW
Accuracy	± 0,05°
Pointing accuracy	±1 mm / m
Battery	2 x 1,5 V
Weight	0,5 kg

0112

€ 99,01

DIGITAL LEVEL

MAGNETIC WITH MILLED ALUMINUM BASE, AUTOMATIC POWER OFF, BACKLIGHT, 2 VIALS, "HOLD FUNCTION, 0° AND 90° WITH SOUND, READING: ABSOLUTE, REF, PERCENT, mm/M AND IN/FT, CARRING BAG



Length	600 mm
Auto power off	5 min
Measuring range	0 ~ 90° x 4
Reading	0° & 90°: 0,05°, 0° - 89°: 0,1°
Accuracy	0° & 90°: ±0,05°, 0,1° - 89,9°: ±0,2°
Battery	2 x AAA 1,5 V
Weight	0,6 kg

0449

€ 21,95

MINI LASER LEVEL

WITH 4 VIALS, BODY IN ABS AND LASER CAPABLE OF EMITTING A SINGLE POINT OR A PERPENDICULAR CROSS



Laser type	Classe II / 650 nm
Working range	20 m
Power	< 1 mW
Accuracy	0,05°
Battery	2 x 1,5V AAA
Weight	0,3 kg

0109

€ 45,25

DIGITAL LEVEL

MAGNETIC WITH ALUMINUM BODY, AUTOMATIC POWER OFF, BACKLIGHT, 2 VIALS, INC, ABS AND HOLD FUNCIONS



Length	400 mm
Auto power off	5 min
Measuring range	0 ~ 90° x 4
Reading	0° - 90°: 0,1°
Accuracy	0° - 90°: ±0,2°
Battery	2 x AAA 1,5 V
Weight	0,26 kg

L090A

€ 102,82

DIGITAL LEVEL - INCLINOMETER AND GONIOMETER WITH MAGNET

0 ÷ 90° MAGNETIC DIGITAL LEVEL ON ALL THE 4 DIRECTIONS, INCLINOMETER AND GONIOMETER, FUNCTION: INCLINATION mm/M AND IN/FT, % OF INCLINATION, BACKLIGHT, AUTOMATIC POWER OFF, ABS AND RELATIVE MEASUREMENTS AND AUTOMATIC DIGIT INVERSION FOR OVERHEAD MEASUREMENTS, WITH BEEPER



Plastic box

Accuracy	± 0.15°
Measuring range	0 ÷ 90° x 4
Reading	0.05°
Dimensions	151 x 31 x 60 mm
Battery	2 x 1.5 V AAA
Weight	285 g

L080**€ 49,95****DIGITAL LEVEL BOX**

0 ÷ 90° MAGNETIC ON ALL THE 4 DIRECTIONS, BACKLIGHT, AUTOMATIC POWER OFF, ABS AND RELATIVE MEASUREMENTS AND AUTOMATIC DIGIT INVERSION FOR OVERHEAD MEASUREMENTS



Blister

Accuracy	0° ± 0.1°; 90° ± 0.1°; 0.1° ÷ 89.9° ± 0.2°
Measuring range	0 ÷ 90° x 4
Reading	0.1°
Dimensions	59 x 27 x 59 mm
Battery	1 x 1.5 V AAA
Weight	82 g

0805/400**€ 8,62****MAGNETIC LEVEL**

HEAVY DUTY WITH 3 VIALS



Overall sizes	400 x 50 x 20 mm
---------------	------------------

L200**€ 176,96****LINEAR LEVEL**

MASTER PRECISION, WITH V-SLOT S GROUND



Overall sizes	200 x 45 x 45 mm
Accuracy	0,02 mm / m

L085**€ 78,85****DIGITAL LEVEL BOX**

± 0 ÷ 180° MAGNETIC, AUTOMATIC POWER OFF, ABS AND RELATIVE MEASUREMENTS AND AUTOMATIC DIGIT INVERSION FOR OVERHEAD MEASUREMENTS, HOLD FUNCTION



Blister

Accuracy	± 0.1°
Measuring range	0° ÷ 180°
Reading	0.1°
Dimensions	51 x 51 x 33 mm
Battery	1 x 3 V CR2032
Weight	150 g

0824-**LEVEL**

HEAVY DUTY ALUMINIUM MILED LEVEL WITH 3 VIALS



Art.	€	Dimensions
0824/300	€ 5,29	300 x 49 x 23 mm
0824/400	€ 5,94	400 x 49 x 23 mm
0824/500	€ 6,94	500 x 49 x 23 mm
0824/600	€ 7,95	600 x 49 x 23 mm

L150**€ 206,08****SQUARE LEVEL**

MASTER PRECISION, WITH 2 PLANE SIDES AND 2 PRISMATIC SIDES



Overall sizes	150 x 38 x 150 mm
Accuracy	0,02 mm / m



G008

€ 48,05

DIGITAL ANGLE FINDER AND LEVEL WITH 2 VIALS

AUTOMATIC CALCULATION OF ANGLES AND INCLINATIONS



Length	400 mm
Range	0 ÷ 225°
Reading	0,1°
Accuracy	± 0,5°
Battery	9 V - 6F22

G005

€ 80,42

UNIVERSAL BEVEL PROTRACTOR



 Plastic case

Reading	5'
Range	0° ÷ 360°
Beam	300 mm

G006-

PROTRACTOR



Art.	€	Arch	Beam
G006/120	€ 26,21	120 mm	150 mm
G006/150	€ 35,50	150 mm	200 mm
G006/200	€ 44,35	200 mm	300 mm



E023/5**€ 624,96****FLEXIBLE ENDOSCOPE FOR MECHANICAL USE**

WITH PROBE Ø 5.5 mm - WI-FI USB EQUIPPED WITH: 3.5 " COLOR LCD SCREEN WITH WI-FI CONNECTION TO THE PROBE - MEMORY MICRO SD 2GB WITH SD ADAPTER - USB PORT - OUTPUT WITH USB CABLE - FLEXIBLE PROBE - CAMERA WITH LED LIGHTS - 45 ° MIRROR - BALL DIRECTION - PROTECTION RING NUT



 **Blow mold case**

Length without handle	1000 mm
Probe	Ø 5,5 mm
Digital zoom	4 X
Depth of field	50 mm
View	60°
Rechargeable battery	Lithium

E022/12**€ 322,56****FLEXIBLE ENDOSCOPE FOR MECHANICAL USE**

WITH PROBE Ø 12 mm EQUIPPED WITH: 3.5 " COLOR LCD SCREEN , FLEXIBLE PROBE, CAMERA WITH LED LIGHTS, YOU CAN ADD UP TO 2 EXTENSIONS, MAGNETIC TERMINAL , TERMINAL HOOK, TERMINAL WITH MIRROR



 **Blow mold case**

Length without handle	900 mm
Probe	Ø 12 mm
View	0° - 60°
Battery	9 V

E022/5**€ 322,56****FLEXIBLE PROBE**

Dimensions	Ø 5,5 mm
Length	1070 mm

E022/P**€ 70,22****FLEXIBLE EXTENSION**

Dimensions	Ø 18 mm
Length	2750 mm

M069**€ 515,20****STEREO MICROSCOPE**

 **Color box**


Independent transmitted illumination	12 V - 10 W
Working range	165 mm 10x - 119 mm 20x
Power	230 V 50 Hz
Eyepieces	10x - 20x
Objectives	1x - 2x
Magnification	10x ÷ 40x
Weight	2,8 kg

M071**€ 364,00****STEREO MICROSCOPE**

 **Color box**

Independent incident and transmitted illumination	12 V - 10 W
Max height of piece to check	75 mm
Power	230 V 50 Hz
Eyepieces	10x
Objectives	2x - 4x
Magnification	20x ÷ 40x
Weight	2,8 kg

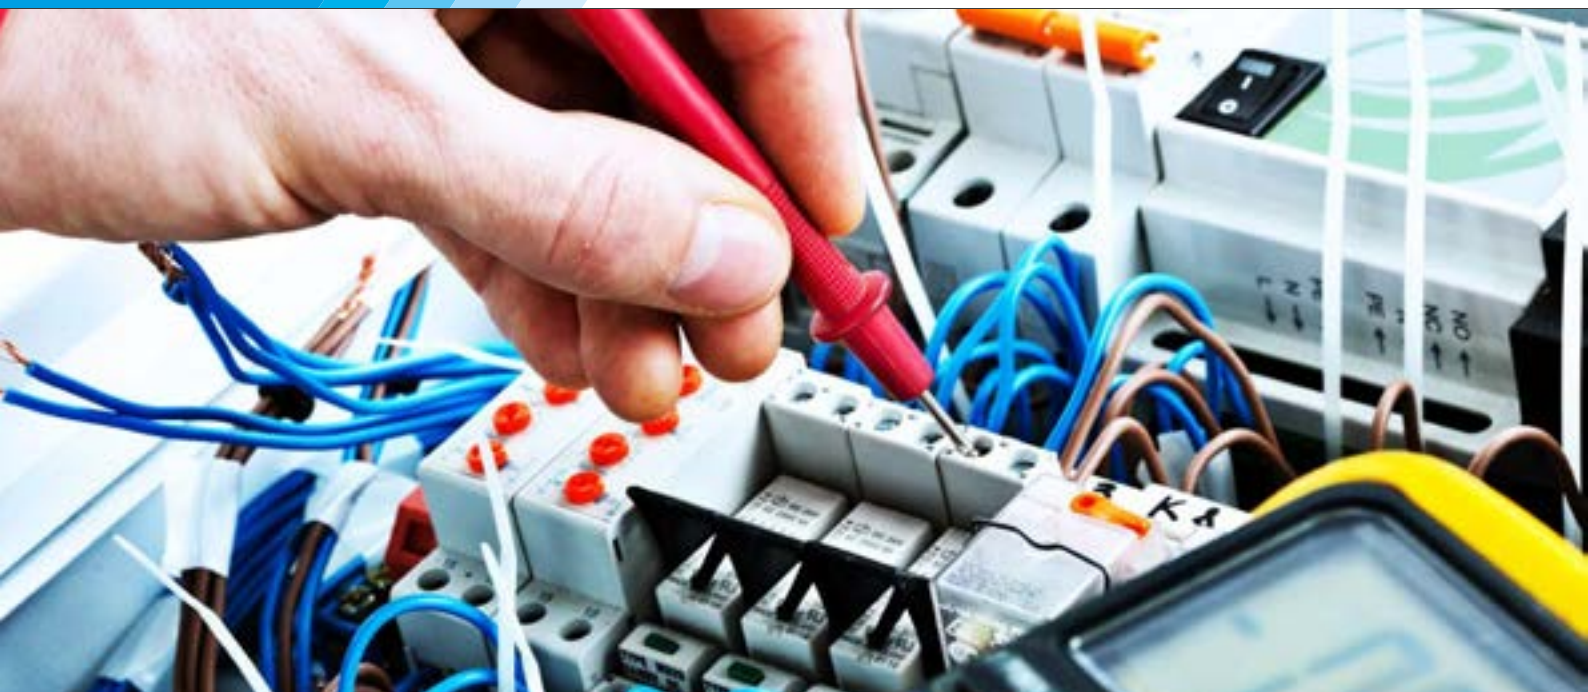


M072

€ 26,54


MAGNIFIER FOR MEASURING


Color box

Magnification	10x
Field of view	24 mm
Range	0-20 mm
Reading	0,1 mm

P075

€ 122,08

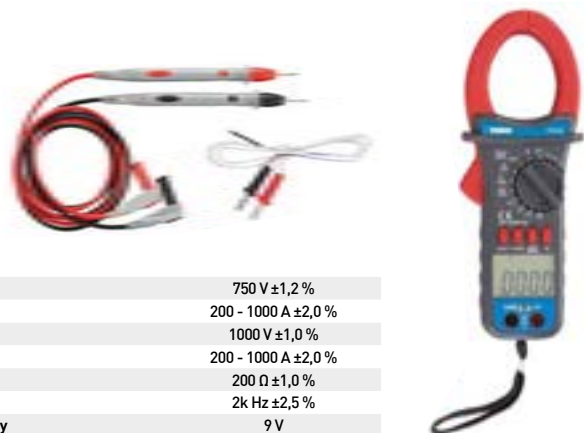DIGITAL CLAMP METER


ACV	750 V $\pm 1,2\%$
ACA	200 - 1000 A $\pm 2,0\%$
DCV	1000 V $\pm 1,0\%$
DCA	200 - 1000 A $\pm 2,0\%$
RES	200 Ω $\pm 1,0\%$
FREQ	2k Hz $\pm 2,5\%$
Battery	9 V

P080

€ 72,91

DIGITAL CLAMP METER


ACV	4 / 40 / 400 / 600 V $\pm 1,5\%$ + 4
ACA	4 / 40 / 400 / 600 A $\pm 1,5\%$ + 4
DCV	4 / 40 / 400 / 600 V $\pm 1,0\%$ + 2
RES	400 Ω / 4 k Ω / 40 k Ω / 400 k Ω / 4 M Ω / 40 M Ω $\pm 1,0\%$ + 2
FREQ	10 MHz $\pm 0,8\%$ + 2
Battery	2 x 1,5 V x AA

T051

€ 17,36

POCKET DIGITAL MULTIMETER

AUDIBLE CONTINUITY AND DIODE TEST



DCV	2-20-200-500V $\pm 0,5\%$
ACV	200-500V $\pm 1,2\%$
DCA	200mA $\pm 1,5\%$
RES	2K-20K-200K-2M Ω $\pm 1\%$
Battery	12V

T050

€ 34,50

DIGITAL MULTIMETER

HIGH ACCURACY TEMPERATURE METER, AUDIBLE CONTINUITY AND DIODE TEST

DCV	200 mV $\pm 0,5\%$
DCV	2 V - 20 V - 200 V $\pm 0,8\%$
DCV	1000 V $\pm 0,1\%$
ACV	2mV - 20 V - 200 V $\pm 1,0\%$
ACV	750 V $\pm 1,2\%$
DCA	2 mA - 20 mA $\pm 1,8\%$
DCA	200 mA $\pm 2,0\%$
DCA	20 A $\pm 2,0\%$
ACA	200 mA $\pm 2,0\%$
ACA	20 A $\pm 3,0\%$
RES	200 Ω $\pm 1,0\%$
RES	2K Ω - 20K Ω - 200K Ω - 2M Ω $\pm 1,0\%$
RES	20 M Ω $\pm 1,0\%$
RES	200 M Ω $\pm 5,0\%$
CAP	2000 pF - 20 nF - 200 nF - 2 μ F - 20 μ F $\pm 4\%$
Temperature	-40 °C $\div$ 400 °C $\pm 1,0\%$
Temperature	400 °C $\div$ 1000 °C $\pm 1,5\%$
Battery	9 V



T053

€ 82,88

DIGITAL MULTIMETER

HIGH ACCURACY TEMPERATURE METER, AUDIBLE CONTINUITY AND DIODE TEST

DCV	200 mV - 2 V - 20 V - 200 V - 1000 V $\pm 0,8\%$
ACV	200 mV - 2 V - 20 V - 750 V $\pm 1,2\%$
DCA / ACA	200 μ A - 2 mA - 20 mA - 200 mA - 20 A $\pm 2,0\%$
RES	200 Ω - 2k Ω - 20k Ω - 200k Ω - 2M Ω - 20M Ω - 200M Ω $\pm 1\%$
CAP	20 nF / 200 nF / 2 μ F / 20 μ F / 200 μ F / 2000 μ F $\pm 2,5\%$
Inductance	2 mH - 20mH - 200 mH - 2 H - 20 H
Battery	9 V
Temperature	-20 °C $\div$ 1000 °C
Frequency	10 mHz
Audible continuity and diode test	
hFE transistor test	0 - 1000
Weight	400 g



0446

€ 12,99

BATTERY AND CHARGING SYSTEM TESTER

WITH LED LIGHTS THAT INDICATE THE STATUS OF THE BATTERY AND OF THE CHARGING SYSTEM. EASY TO USE



Blister

Battery	11,5 $\div$ 12,6V
Charging system voltage range	13,2 $\div$ 15,5 V
Cable length	800 mm
Weight	0,1 kg

0013/142

€ 1,52

CIRCUIT TESTER SCREWDRIVER

WITH HANDLE IN INSULATING MATERIAL, NEON LIGHT AND STEEL BLADE



Range	100 $\div$ 500 V
Length	142 mm

0013/185

€ 1,66

CIRCUIT TESTER SCREWDRIVER

WITH HANDLE IN INSULATING MATERIAL, NEON LIGHT AND STEEL BLADE



Range	100 $\div$ 500 V
Length	190 mm

0029

€ 5,05

AUTOMOTIVE CIRCUIT TESTER

FOR THE IDENTIFICATION OF THE CURRENT IN THE WIRES OF THE CARS, WITH VOLTAGE OF 6-12-24 V



Weight	40 g
Voltage	6 - 12 - 24 V

ML40

€ 55,78

LASER DISTANCE METER

IDEAL FOR THE MEASUREMENTS IN CONSTRUCTION AND CARPENTRY, FUNCTIONS: ADDITION, SUBTRACTION, AREA AND VOLUME CALCULATION, AUTO POWER OFF



54

Range	0,05 ÷ 40 m
Accuracy	± 2 mm
Battery	2 AAA x 1.5 V
Weight	0.07 kg

T068

€ 120,96

LASER POINTER INFRARED TEMPERATURE METER


Blister

Range	-30°C ÷ 550 °C / -22 °F ÷ 1022 °F
Accuracy	-30 °C ÷ 0 °C [-22 °F ÷ 32 °F] ±3 % o ±3 °C
Accuracy	0 °C ÷ 100 °C [32 °F ÷ 212 °F] ±2 % o ±2 °C
Accuracy	> 100 °C (> 212 °F) ±3 % o ±3 °C
Reading	0,1 °C / 0,1 °F
Emissivity	0,1 ÷ 1,0
Battery	9 V
Weight	130 g
Overall sizes	146 x 80 x 38 mm
Distance/Spot size	1 : 12

ML80A

€75,04

LASER METER

HANDY AND LIGHTWEIGHT, IDEAL FOR THE MEASUREMENTS IN CONSTRUCTION AND CARPENTRY, FUNCTIONS: ADDITION, SUBTRACTION, AREA AND VOLUME CALCULATION, AUTO POWER OFF



54

Range	0,05 ÷ 80 m
Accuracy	±2 mm
Battery	3 AAA x 1,5 V
Weight	130 g

M035

€ 51,18

LASER POINTER ULTRASONIC DISTANCE METER

FUNCTIONS: ADDITION, SUBTRACTION, AREA AND VOLUME CALCULATION, AUTO POWER OFF



Color box

Range	0,9 ÷ 18,30 m / 3 ÷ 60 piedi - Ft
Reading	0,01 m / 0,5 pollici - inch
Accuracy	0,5% ±1 cifra / ±1 digit
Conversion button	m/piedi - m/feet
Memory	3
Battery	9 V
Overall sizes	155 x 72 x 43 mm

T064

€ 93,07

LASER POINTER INFRARED TEMPERATURE METER


Blister

Range	-25°C ÷ 400 °C / -13 °F ÷ 752 °F
Accuracy	-25 °C ÷ 400 °C ±(2 % + 1 °C)
Accuracy	-13 °F ÷ 752 °F ±(2 % +1 °F)
Reading	1 °C / 2 °F
Battery	9 V
Weight	300 g
Distance/Spot size	1 : 10

T054

€ 34,50

POCKET DIGITAL TEMPERATURE METER

WITH ENVIRONMENTAL AND IMMERSION PURPOSE THERMOCOUPLES



Color box

Reading	1° C
Range	-50°C ÷ 1100°C with not supplied probe T056/TP03, -50°C ÷ 750°C with supplied probe T056/TP02, -50°C ÷ 250°C with supplied probe T056/TP01
Accuracy	0°C ÷ 500°C ±(0,75% + 1°C), 500°C ÷ 750°C ±(1% + 1°C), 750°C ÷ 1000°C ±(2% + 1°C), 1000°C ÷ 1200°C ±(4% + 3°C)
Thermocouple type	"K"
Battery	9 V

T055

€ 134,40

PORTABLE DIGITAL TEMPERATURE METER

ENVIRONMENTAL AND IMMERSION PURPOSE THERMOCOUPLES TYPE "K" WITH PLASTIC BOX



Range	T056/TP01: -50°C ÷ 250°C
Range	T056/TP02: -50°C ÷ 750°C
Reading	0,1 °C (<1000 °C)
Reading	0,1 °F (<1000 °F) mm
Accuracy	±(0,3% n+1.8 °F)
Accuracy	±(0,3% n+1 °C)
Overall sizes	178 x 68 x 39 mm
Weight	190 g
Thermocouple length	120 mm
Battery	4 x 1,5 V AA

T063

€ 62,38

PORTABLE DIGITAL TEMPERATURE METER

ENVIRONMENTAL AND IMMERSION PURPOSE THERMOCOUPLES TYPE "K", DOUBLE TEMPERATURE DETECTION, WITH BOX



Range	T056/TP01: -50°C ÷ 250°C
Range	T056/TP02: -50°C ÷ 750°C
Reading	1° C
Accuracy	-50 °C ÷ 1200 °C ±(0.3 % + 2 °C)
Accuracy	1200°C ÷ 1300 °C ±(0.6 % + 2 °C)
Accuracy	-58 °F ~ 1200°F ±(0.3 % + 2 °F)
Accuracy	1200 °F ~ 1999 °F ±(0.6 % + 2 °F)
Battery	9 V



T056/TP01

€ 8,18

ENVIRONMENTAL THERMOCOUPLE "K" TYPE



Range	-50°C ÷ 250°C
Thermocouple type	"K"
Thermocouple length	2 mm

T056/TP02

€ 9,97

ENVIRONMENTAL OR IMMERSION THERMOCOUPLE "K" TYPE



Range	-50°C ÷ 750°C
Thermocouple type	"K"
Total length	240 mm

T056/TP03

€ 59,58

THERMOCOUPLE "K" TYPE

ENVIRONMENTAL OR IMMERSION



Range	-50 °C ÷ 1100 °C
Thermocouple type	"K"
Thermocouple length	650 mm

T057
€ 207,20
ENVIRONMENTAL TEMPERATURE AND HUMIDITY DIGITAL TESTER


Plastic box

Temperature	-10 °C ÷ +65 °C
Temperature reading	0,1° C
Temperature accuracy	±0,5 °C
Humidity	10 % ÷ 100 %
Accuracy	2 % ±1 % RH
Weight	650 g
Battery	4 x 1,5 V AA

I002
€ 302,40
INDUCTIVE MOISTURE METER FOR MEASURING HUMIDITY

METER FOR HUMIDITY IN WOOD MOISTURE CONTENT AND OTHER MATERIALS



Working temperature	0 °C - 40 °C
Range	0 - 80 %
Building moisture	0 - 50 %
Reading	0,1 %
Accuracy	± (0,5 % n+1)
Battery	4 x 1,5 V AA

F010
€ 285,60
SOUND LEVEL METER


IEC651 CLASS II Plastic box

Frequency range	31,5 Hz ÷ 8 kHz
Range	30 dB ÷ 130 dB (A) / 32 dB ÷ 130 dB (C) / 35 dB ÷ 130 dB (Lineare)
Reading	0,1 dB
Functions	SL, LN, Leq (livello equivalente)
Detection characteristics	Fast, Slow, Max
Sampling time	0,1 s
Display	10 mm
Working temperature	-10 °C ÷ 40 °C
Weight	300 g
Not included batteries	4 x 1,5 V AAA

L014
€ 66,64
DIGITAL LUXMETER


Range	0 LUX ÷ 2000 LUX ÷ 20000 LUX ÷ 50000 LUX
Reading	1 LUX
Accuracy	± 5 %
Battery	9 V

A005
€ 190,40
DIGITAL ANEMOMETER

Plastic box

AIR SPEED MEASUREMENT

Measurement	m/s - Km/h - ft/min - Knots
Spindle speed	0,4 ÷ 30,0 / 1,4 ÷ 108 / 80 ÷ 5910 / 0,8 ÷ 58,3
Reading	0,1
Accuracy	± [2 % + 1 cifra] / ± [2 % + 3 cifra] / ± [2 % + 2 cifra] / ± [2 % + 2 cifra]

TEMPERATURE MEASUREMENT

Range	0° C ÷ 60° C / 32° F ÷ 140° F
Reading	0,1° C / 0,1° F
Accuracy	0,5° C / 0,9° F
Weight	325 g
Battery	9 V not included



NON DISPONIBILE

MD01

€ 109,09

METAL DETECTOR

ANALOG METAL DETECTOR COMPOSED OF VIEW METER, 2 COLOUR LED WHICH SHOW THE TYPE OF METAL BEING DETECTED, AUDIO SENSOR, ADJUSTABLE VOLUME, AUTO TUNE, SIMPLE DISC, WATERPROOF SEARCHING COIL, COMFORTABLE ARM SUPPORT AND LOW BATTERY INDICATOR



Coil diameter	170 mm
Jack connector	1/4"
Sensitivity	> 15 cm per una moneta di ø 25 mm
Battery	9 V
Weight	1,7 kg

C069

€ 101,92

CONTACT TYPE DIGITAL TACHOMETER



Plastic box

Round speed	2,5 - 9999,9 rpm
Surface speed	0,05 - 999,99 m/min
Reading	0,1 (7,5 - 999,9) rpm
Reading	1 (1000-9999,9) rpm
Accuracy	± 0,05 % + 1 cifra
Overall sizes	190 x 72 x 37 mm
Weight	300 g
Battery	4 x 1,5 V AA

C067

€ 101,92

PHOTO TYPE DIGITAL TACHOMETER

WITH REFLECTIVE STRIPES



Plastic box

Range	2,5 ÷ 9999,9 rpm
Reading	0,1 (2,5 ÷ 999,9) rpm
Reading	1 (1000 ÷ 9999,9) rpm
Use distance	da 50 ÷ 60 mm a 50 ÷ 250 mm
Accuracy	± 0,05 % della lettura + 1 cifra / ± 0,05 % of reading + 1 dgt
Overall sizes	170 x 72 x 37 mm
Battery	4 x 1,5V AA

C070

€ 142,24

CONTACT AND OPTICAL TYPE DIGITAL TACHOMETER

WITH REFLECTIVE STRIPES



Plastic box

Rotation laser speed	2,5 ÷ 9999,9 rpm
Rotation contact speed	0,05 ÷ 999,9 rpm
Surface speed	0,1 ÷ 999,99 m / min
Reading	0,1 (2,5 ÷ 999,9) rpm
Reading	1 (1000 ÷ 9999,9) rpm
Use distance	da 50 ÷ 60 mm a 50 ÷ 250 mm (con ottico)
Accuracy	± 0,05 % + 1 cifra
Overall sizes	220 x 75 x 29 mm
Battery	4 x 1,5V AA

V002

€ 1000,16

VIBRATION TESTER

EQUIPPED OF MAGNETIC PROBE, 2 ENDS, SOFTWARE AND USB CABLE



Acceleration	0,1 ÷ 400 m/s ²
Speeds	0,01 ÷ 40 cm/s
Displacement	0,001 ÷ 4 mm
Balancing rpm	60 ÷ 99,990
Frequency	1÷20 kHz
Accuracy	± 5 %
Battery	4 x 1,5 V AA

S004
€ 1377,60
ULTRASONIC THICKNESS GAUGE

Blow mold case

Reading	4-digit LCD
Range	1,0 - 225,0 mm
Accuracy	±0,1 mm
Overall sizes	126 x 68 x 23 mm
Weight	170 g
Battery	2 x 1,5 V AA

R008
€ 865,76
DIGITAL COATING THICKNESS GAUGE FOR FERROUS AND NON-FERROUS BASES

SOFTWARE EQUIPPED


Blow mold case

Range	0 ÷ 1250 µm
Reading	0,1 µm
Accuracy	±3 % µm o/or 2,5 µm
Battery	3 x 1,5V AAA

0583
€ 82,88
BRIX REFRACTOMETER

Plastic box

Range	0 ÷ 80 % Brix
Reading	1 % Brix

0433
€ 76,05
REFRACTOMETER

BRIX, USEFUL TO CHECK COOLANT OILS


Plastic box

Range	0 ÷ 32% Brix
Reading	0,2% Brix

0312
€ 82,88
REFRACTOMETER TO MEASURE FREEZING POINT

Plastic box

Range for coolants E	-50 °C ÷ 0 °C
Reading	1°C
Range for coolants P	-50 °C ÷ 0 °C
Reading	1°C
Range for battery liquids B	1,10 ÷ 1,40 sg
Reading	0,01 sg
Range for cleaner liquids C	-40 ÷ 0°C
Reading	5°C

D007/A
€ 72,69
SHORE "A" DUROMETER

RUBBER AND SOFT MATERIAL HARDNESS TESTER



Range	0 ÷ 100 A
Reading	2 A
Weight	128 g

D001

€ 2251,20

HARDNESS TESTING MACHINE

MOTORIZED, ROCKWELL, BRINELL AND VICKERS



Wooden case

Reading	0,5 HR
Diamond and still ball penetrators	n° 1+1
Flat anvils	n° 2
V - anvil	n° 1
Hardness test blocks	n° 5 (HRC, 3xHRB, HRA)
Max Height of tested piece	170 mm
Throat depth	125 mm
Durometer dimensions	185 x 465 x 640 mm
Test force	588,4 N / 980,7 / 1471 N (60 kgf / 100 kgf / 150 kgf)
MEASURE UNITS:	
HRC	20 ÷ 70
HRB	25 ÷ 100
HRA	20 ÷ 88
Weight	90 kg

D018

€ 4312,00

ROCKWELL HARDNESS TESTING MACHINE



Wooden case

Test force	294,2 N / 306,5 N / 588,4 N / 612,9 N / 980,7 N / 1471 N / 1839 N; 30 kgf / 31,25 kgf / 60 kgf / 62,5 kgf / 100 kgf / 150 kgf / 187,5 kgf
Diamond cone and pyramid penetrators	n° 1+1
Steel ball penetrators	n° 3
Flat anvils	n° 2
V - anvil	n° 1
Hardness test blocks	n° 1 Brinell; n° 5 Rockwell; n° 1 Vickers
Magnification	37,5x - 75x
Max Height of tested piece	Rockwell: 175 mm; Brinell - Vickers: 145 mm
Throat depth	160 mm
Power	230 V - 50 / 60 Hz - 6 W
Durometer dimensions	525 x 240 x 730h mm
MEASURE UNITS:	
HBS	4 - 450
HRB	20 - 100
HRA	20 - 88
HRC	20 - 70
HV	200 - 1000
Weight	70 kg

D011/A

€ 126,56

SHORE "A" DIGITAL DUROMETER

RUBBER AND SOFT MATERIAL HARDNESS TESTER



Range	0 ÷ 100 A
Reading	0.5 A

D011/D

€ 126,56

SHORE "D" DIGITAL DUROMETER

HARD RUBBER AND PLASTIC MATERIAL HARDNESS TESTER



Range	0 ÷ 100 D
Reading	0.5 D

P013

€ 132,16

SHORE "A" DUROMETER TEST BLOCK

 WITH VARIABLE HARDNESS FROM 26HA TO 88HA. TEST BLOCK COLOURS: PURPLE, BROWN, GREEN, ORANGE, RED, YELLOW AND GREY. PRECISION $\pm 2HA$


7 Pcs

S110

€ 364,00

CONCRETE TEST HAMMER

FOR MEASURING THE HARDNESS OF CEMENT MANUFACTURED PRODUCTS



Test force	2.207 Nm
Spring tension	7.84 N
Swing	75 mm
Weight	1,5 kg

S111

€ 402,08

ANVIL FOR CONCRETE TEST HAMMER SETTING


Weight	16 kg
--------	-------

R002

€ 2609,60

DIGITAL ROUGHNESS TESTER

WITH PIEZOELECTRIC PROBE

Blow mold case

Ra	0,03 ÷ 6,30 μ m
R max	0,20 ÷ 25,00
Rz	0,20 ÷ 25,00
Cut off	0,8 mm
Evaluation length	0,8 mm / 2,4 mm / 4,0 mm
Reading	0,01 μ m
Overall sizes	150 x 33 x 83 mm
Weight	490 g
Battery	9 V



B031

€ 21,95

HIGH ACCURACY DIGITAL POCKET SCALE

NOT LEGAL FOR TRADE



 Color box

Capacity	100 g
Reading	0,01 g
Weighing mode	g / dwt / tl / ct
Weight	100 g

B003/5/1

€ 32,03

ELECTRONIC DIGITAL SCALE

NOT LEGAL FOR TRADE, AUTO POWER OFF, TARE FUNCTION



 Color box

Capacity	5 kg - 176,4 oz
Reading	1 g - 0.1 oz
Battery	2 x 1,5V AA
Overall sizes	170 x 240 x 35 mm
Weight	0,5 kg

B021

€ 17,92

HIGH ACCURACY DIGITAL POCKET SCALE

NOT LEGAL FOR TRADE



 Color box

Capacity	500 g
Reading	0,1 g
Weighing mode	g / dwt / gn / ct
Weight	100 g

B018

€ 116,48

ELECTRONIC DIGITAL SCALE WITH DOUBLE DISPLAY

NOT LEGAL FOR TRADE WITH 4V 4AH BATTERY AND TRANSFORMER



 Color box

Capacity	30 kg
Reading	10 g
Platform size	340 x 230 mm
Overall sizes	350 x 330 x 120 mm
Power	230V 50 Hz
Rechargeable battery	4 V 4 Ah
Weight	3,5 kg



B004-
RECHARGEABLE ELECTRONIC DIGITAL COUNTER SCALES

NOT LEGAL FOR TRADE WITH 6V 4 AH BATTERY AND TRANSFORMER


0561/B
€ 33,38
**SPARE PART
BATTERY**

Art.	€	Capacity	Reading	Weight	Scale dimensions	Platform dimensions	Rechargeable battery
B004/7	€ 356,16	7,5 kg	0,2 g	5 kg	350 x 340 x 105 mm	335 x 228 mm	6 V 4 Ah
B004/30	€ 356,16	30 kg	1 g	5 kg	350 x 340 x 105 mm	335 x 228 mm	6 V 4 Ah

B004/150
€ 694,40
RECHARGEABLE ELECTRONIC DIGITAL COUNTER SCALE

NOT LEGAL FOR TRADE WITH 6V 4AH BATTERY AND TRANSFORMER


0561/B
€ 33,38
**SPARE PART
BATTERY**

Capacity	150 kg
Reading	10 g
Weight	17 kg
Rechargeable battery	6 V 4 Ah


D012-
DIGITAL DYNAMOMETERS

NOT LEGAL FOR TRADE WITH 6V 10AH BATTERY AND TRANSFORMER

Art.	€	Digits sizes	Capacity	Reading	Minimum weighing	Max weight	Weight	Rechargeable battery
D012/0100	€ 814,24	40 x 20 mm	1000 kg	0,200 kg	0,200 kg	150%	14 kg	6 V 10 Ah
D012/0300	€ 965,44	40 x 20 mm	3000 kg	0,500 kg	0,500 kg	150%	14,5 kg	6 V 10 Ah
D012/0500	€ 1117,76	40 x 20 mm	5000 kg	1 kg	1 kg	150%	21 kg	6 V 10 Ah
D012/1000	€ 1321,60	40 x 20 mm	10000 kg	2 kg	2 kg	150%	34 kg	6 V 10 Ah



